


ALL LADDERS:

1. Wall brackets are left loose for field installation. Maximum spacing for wall brackets is 6'.
2. Ladder ships in sections and arrives unassembled. Assembly required by others.
3. 1 pair of floor brackets included with each ladder.
4. Aluminum is mill finish.
5. 300 lb. rung capacity
6. Comply with OSHA standards and ANSI 14.3.

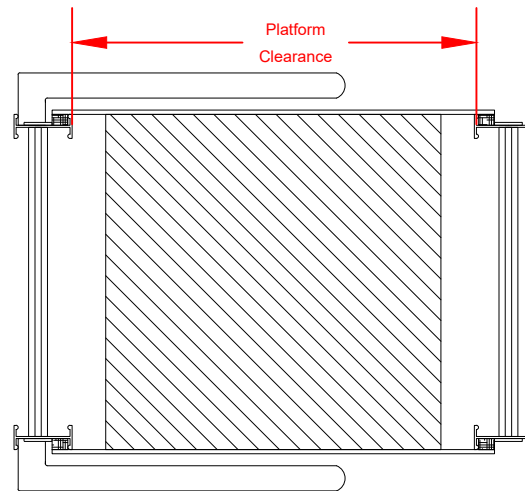

**# OF BRACKETS/
LADDER**

SIZE	PLATFORM CLEARANCE	# WALL BRACKETS
ALACCB4	3'-3"	1
ALACCB5	4'-3"	1
ALACCB6	5'-3"	1
ALACCB7	6'-3"	1
ALACCB8	7'-3"	2
ALACCB9	8'-3"	2
ALACCB10	9'-3"	2
ALACCB11	10'-3"	2
ALACCB12	11'-3"	2
ALACCB13	12'-3"	3
ALACCB14	13'-3"	3
ALACCB15	14'-3"	3
ALACCB16	15'-3"	3
ALACCB17	16'-3"	3
ALACCB18	17'-3"	3
ALACCB19	18'-3"	4
ALACCB20	19'-3"	4



www.anyladder.com
info@anyladder.com

ADDITIONAL OPTIONS:

- Swing Gate at Boarding Rails
- 92" Security Door
- Off Floor Mounting (No Floor mount)
-
-

ALACCBPR SIZE CHART

FREIGHT (SPECIFY ADDRESS):

PROJECT: _____
 ADDRESS: _____
 CITY, STATE, ZIP: _____
 JOB PHONE #: _____

COMPANY: _____
 CONTACT: _____
 QUANTITY: _____
 PHONE #: _____
 EMAIL: _____