

PYRAMID

071920 Honda CB500X Hugger Fitting Instructions

Kit includes:

2X Rubber Strips (15mm length each)	Pre-fitted	CRUB0001
1X Circular Rubber Pad	Pre-fitted	CBUM003
4X Foam Strips (50mm length each)	Pre-fitted	CFOA0001
1X Nylon Zip-Tie 430mm X 7.6mm		CAB0430A

Fig 1 illustrates how the rubber strips, circular rubber pad & foam strips are fitted.




Feed the zip-tie through the slots in the Pyramid hugger as highlighted in **RED** - **Fig 2**.

Slide the Pyramid hugger over the rear tyre and position in place on the swingarm.
Note: If you have a centre stand it can be useful to place the Hugger on the rear wheel and turn the rear wheel forward until in the correct position.

The zip-tie should now be passed down the front of the swingarm to meet with the other end of the zip-tie at the bottom - see **Fig 3** for guidance.

Fit the zip-tie together and slowly tighten by hand checking the alignment of the zip-tie & Pyramid hugger. Moving the Hugger slightly as you tighten the cable tie can help to get extra 'clicks' in the zip-tie.

Use a pair of pliers or grips to get more leverage on the zip-tie for final tightening. Trim the excess zip-tie away once fitted.

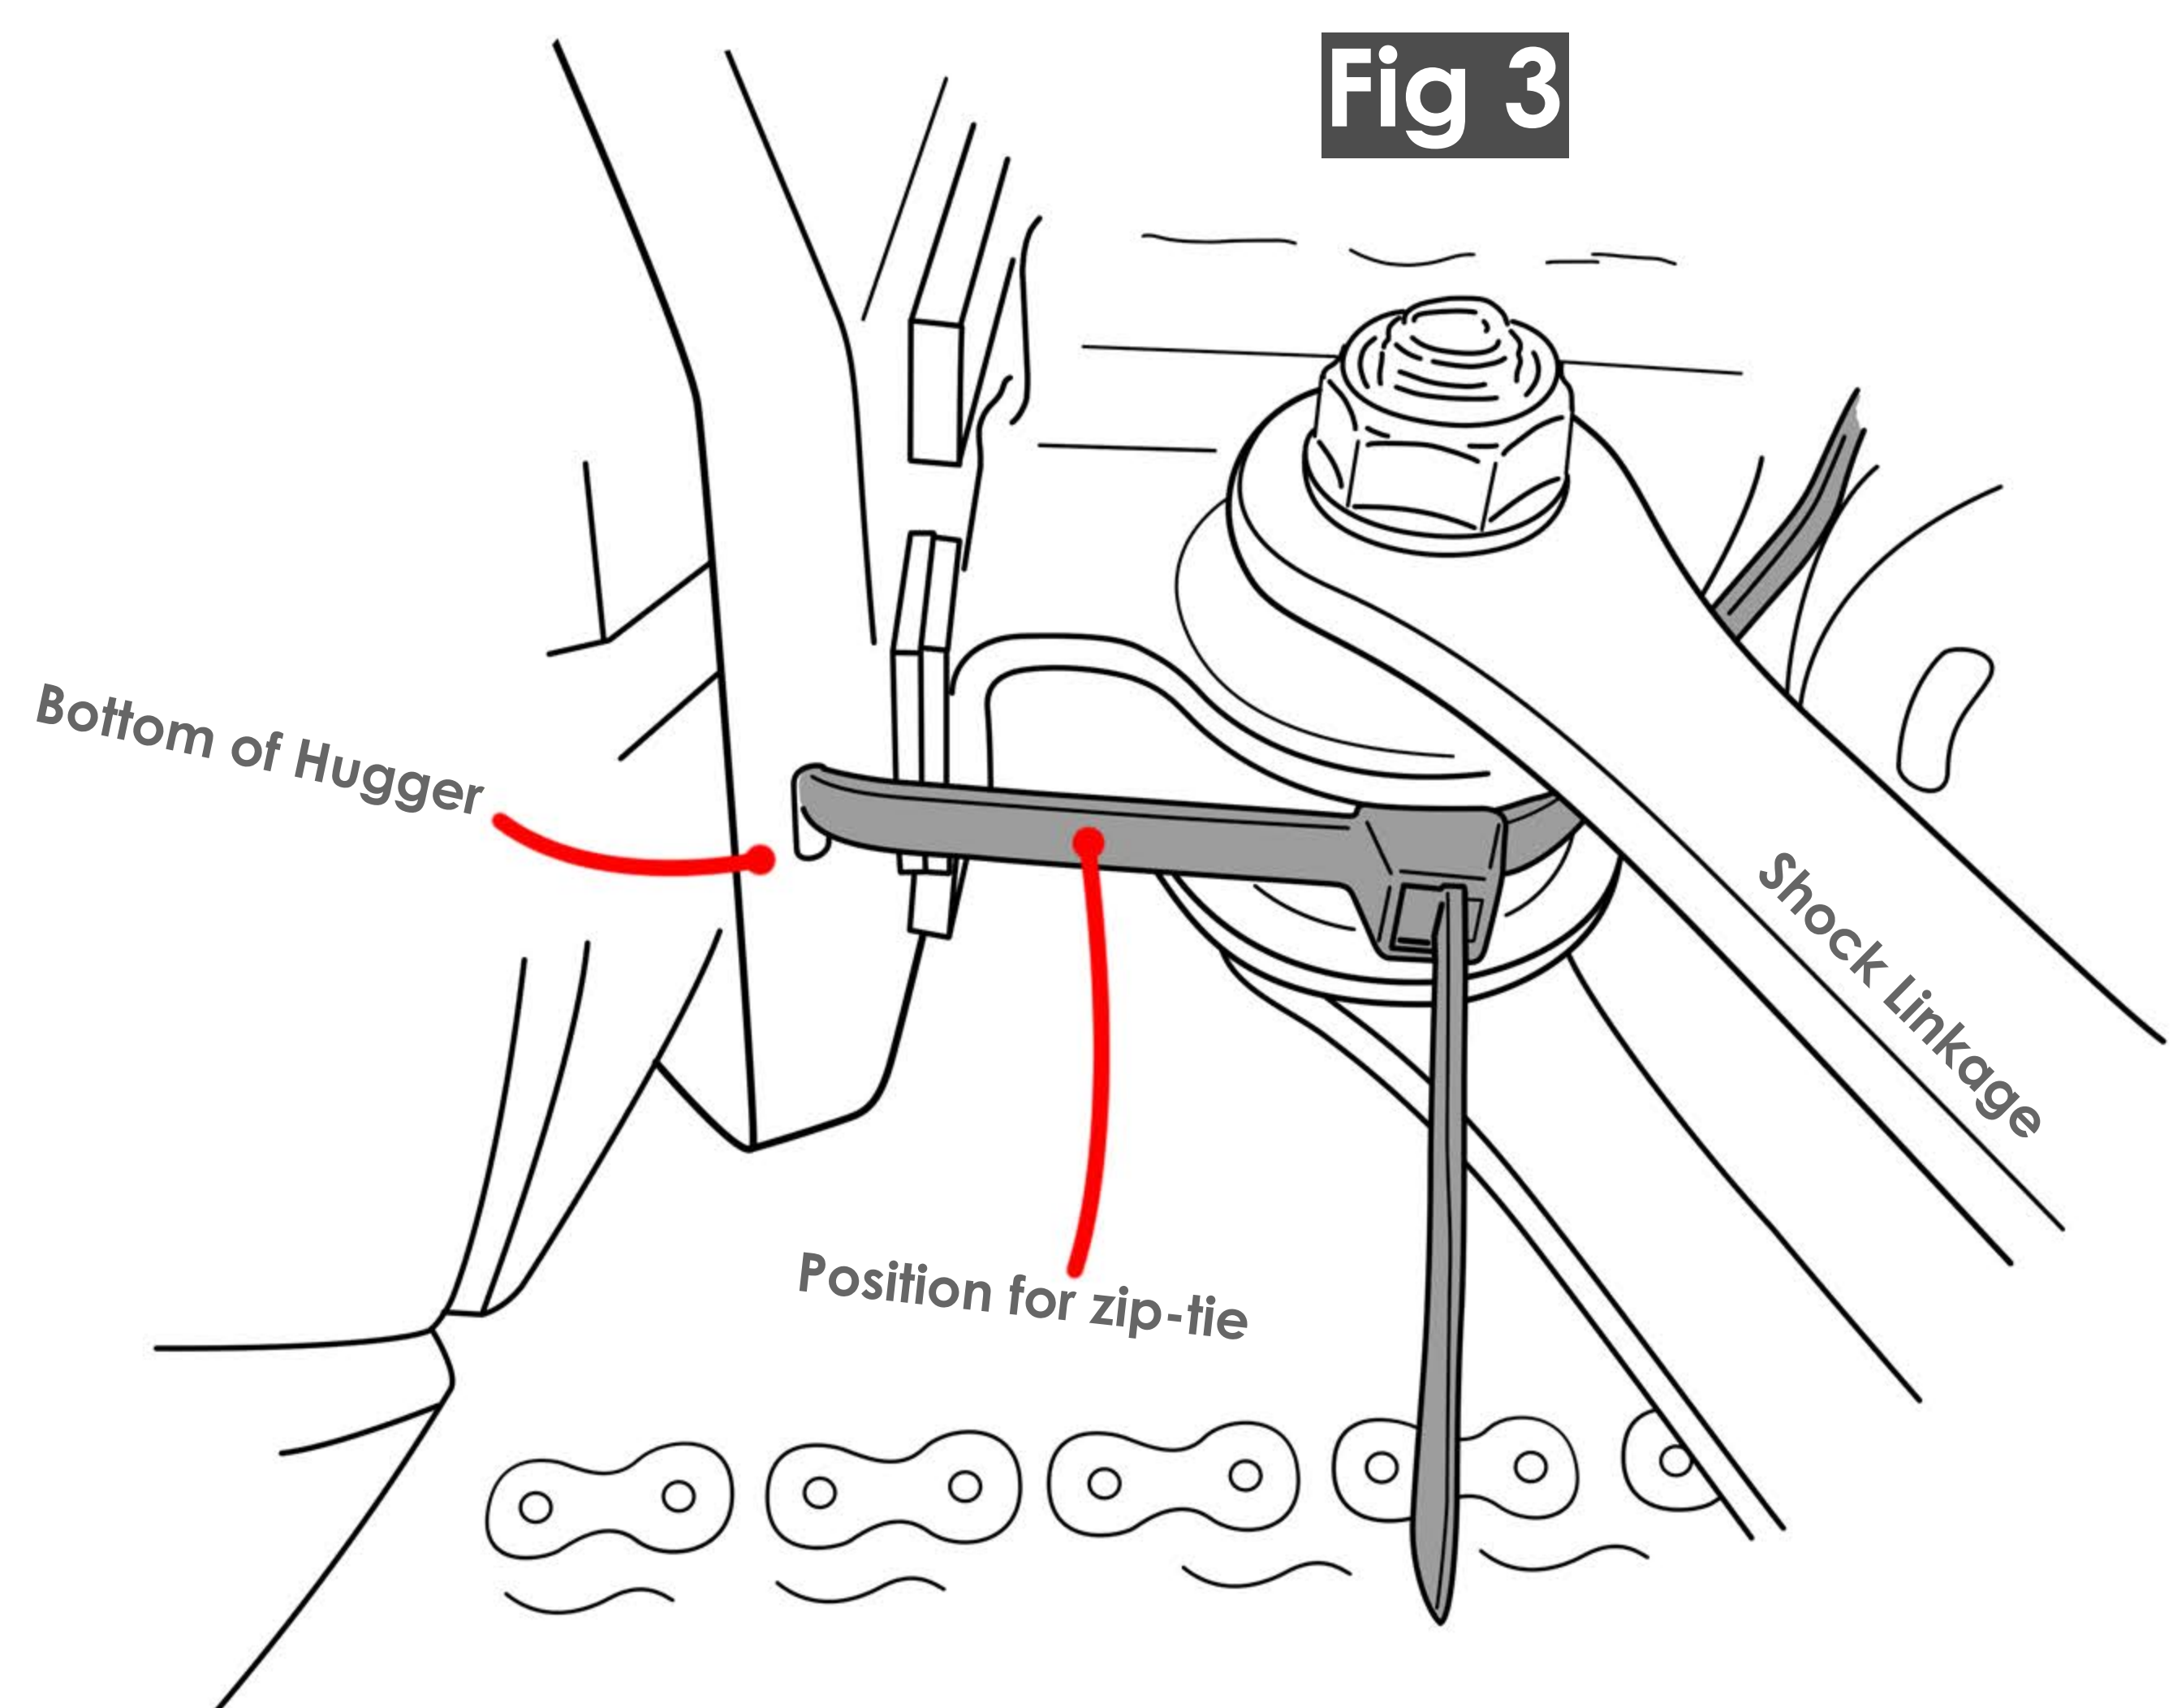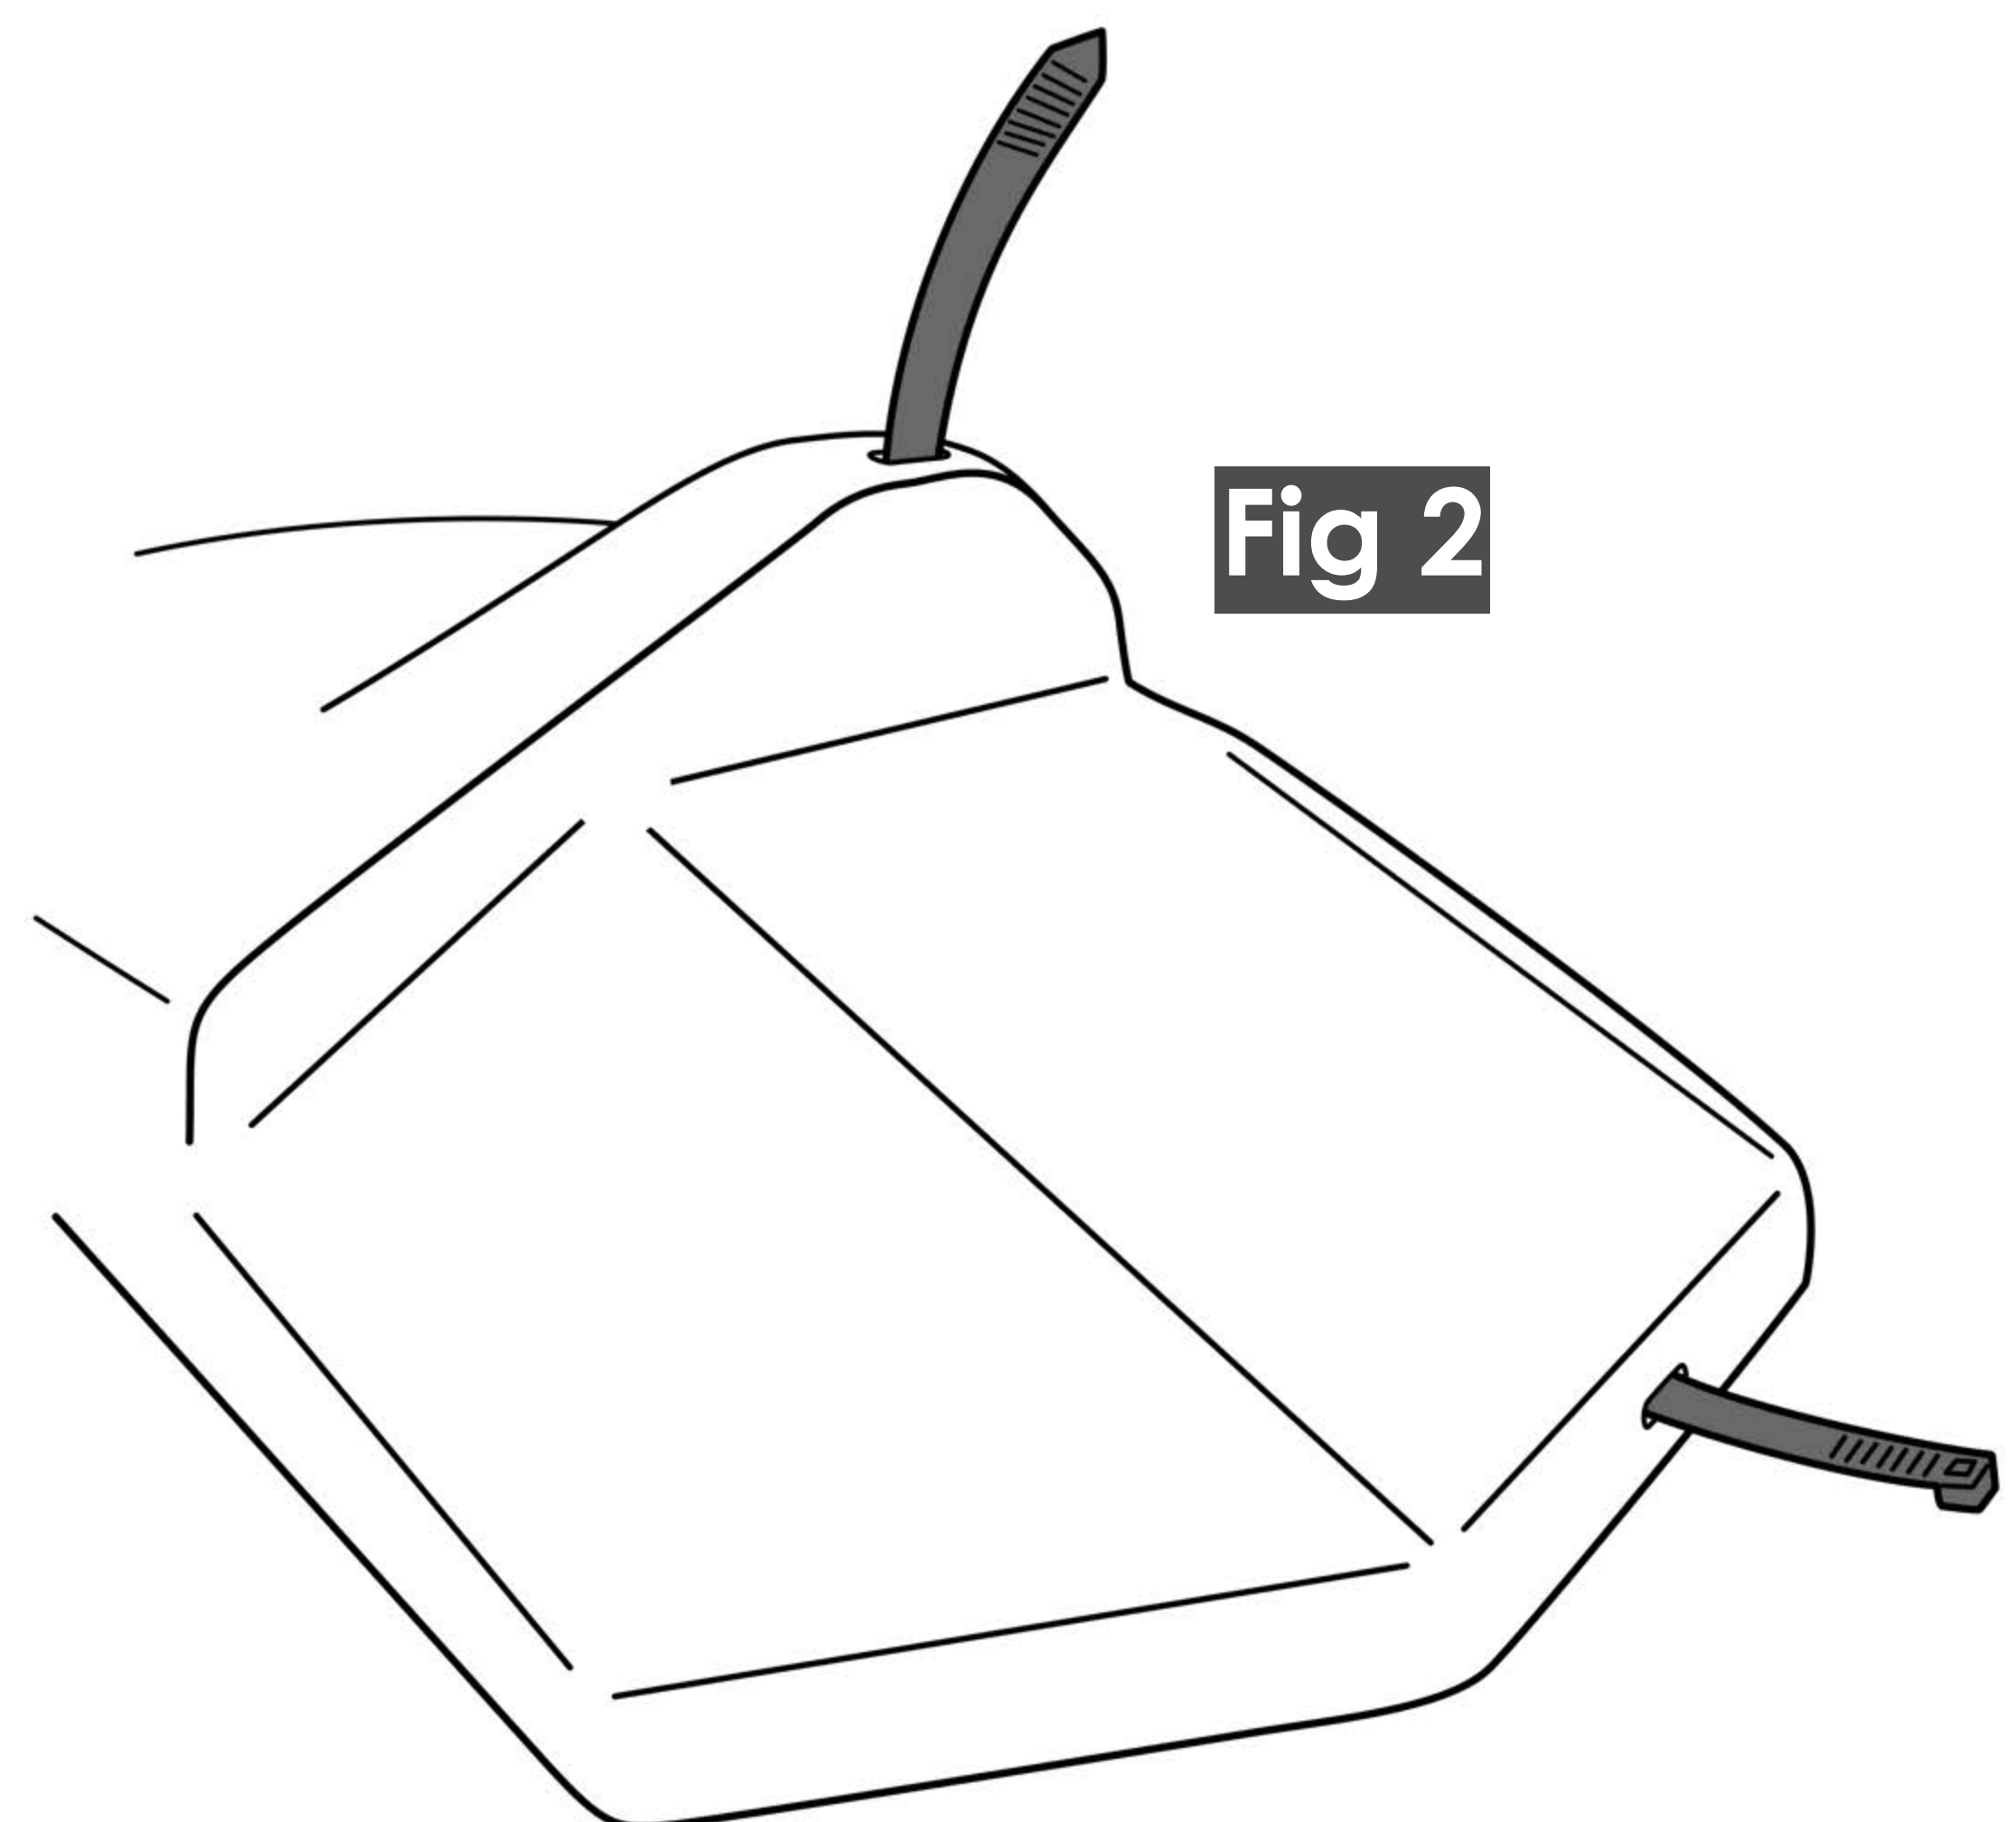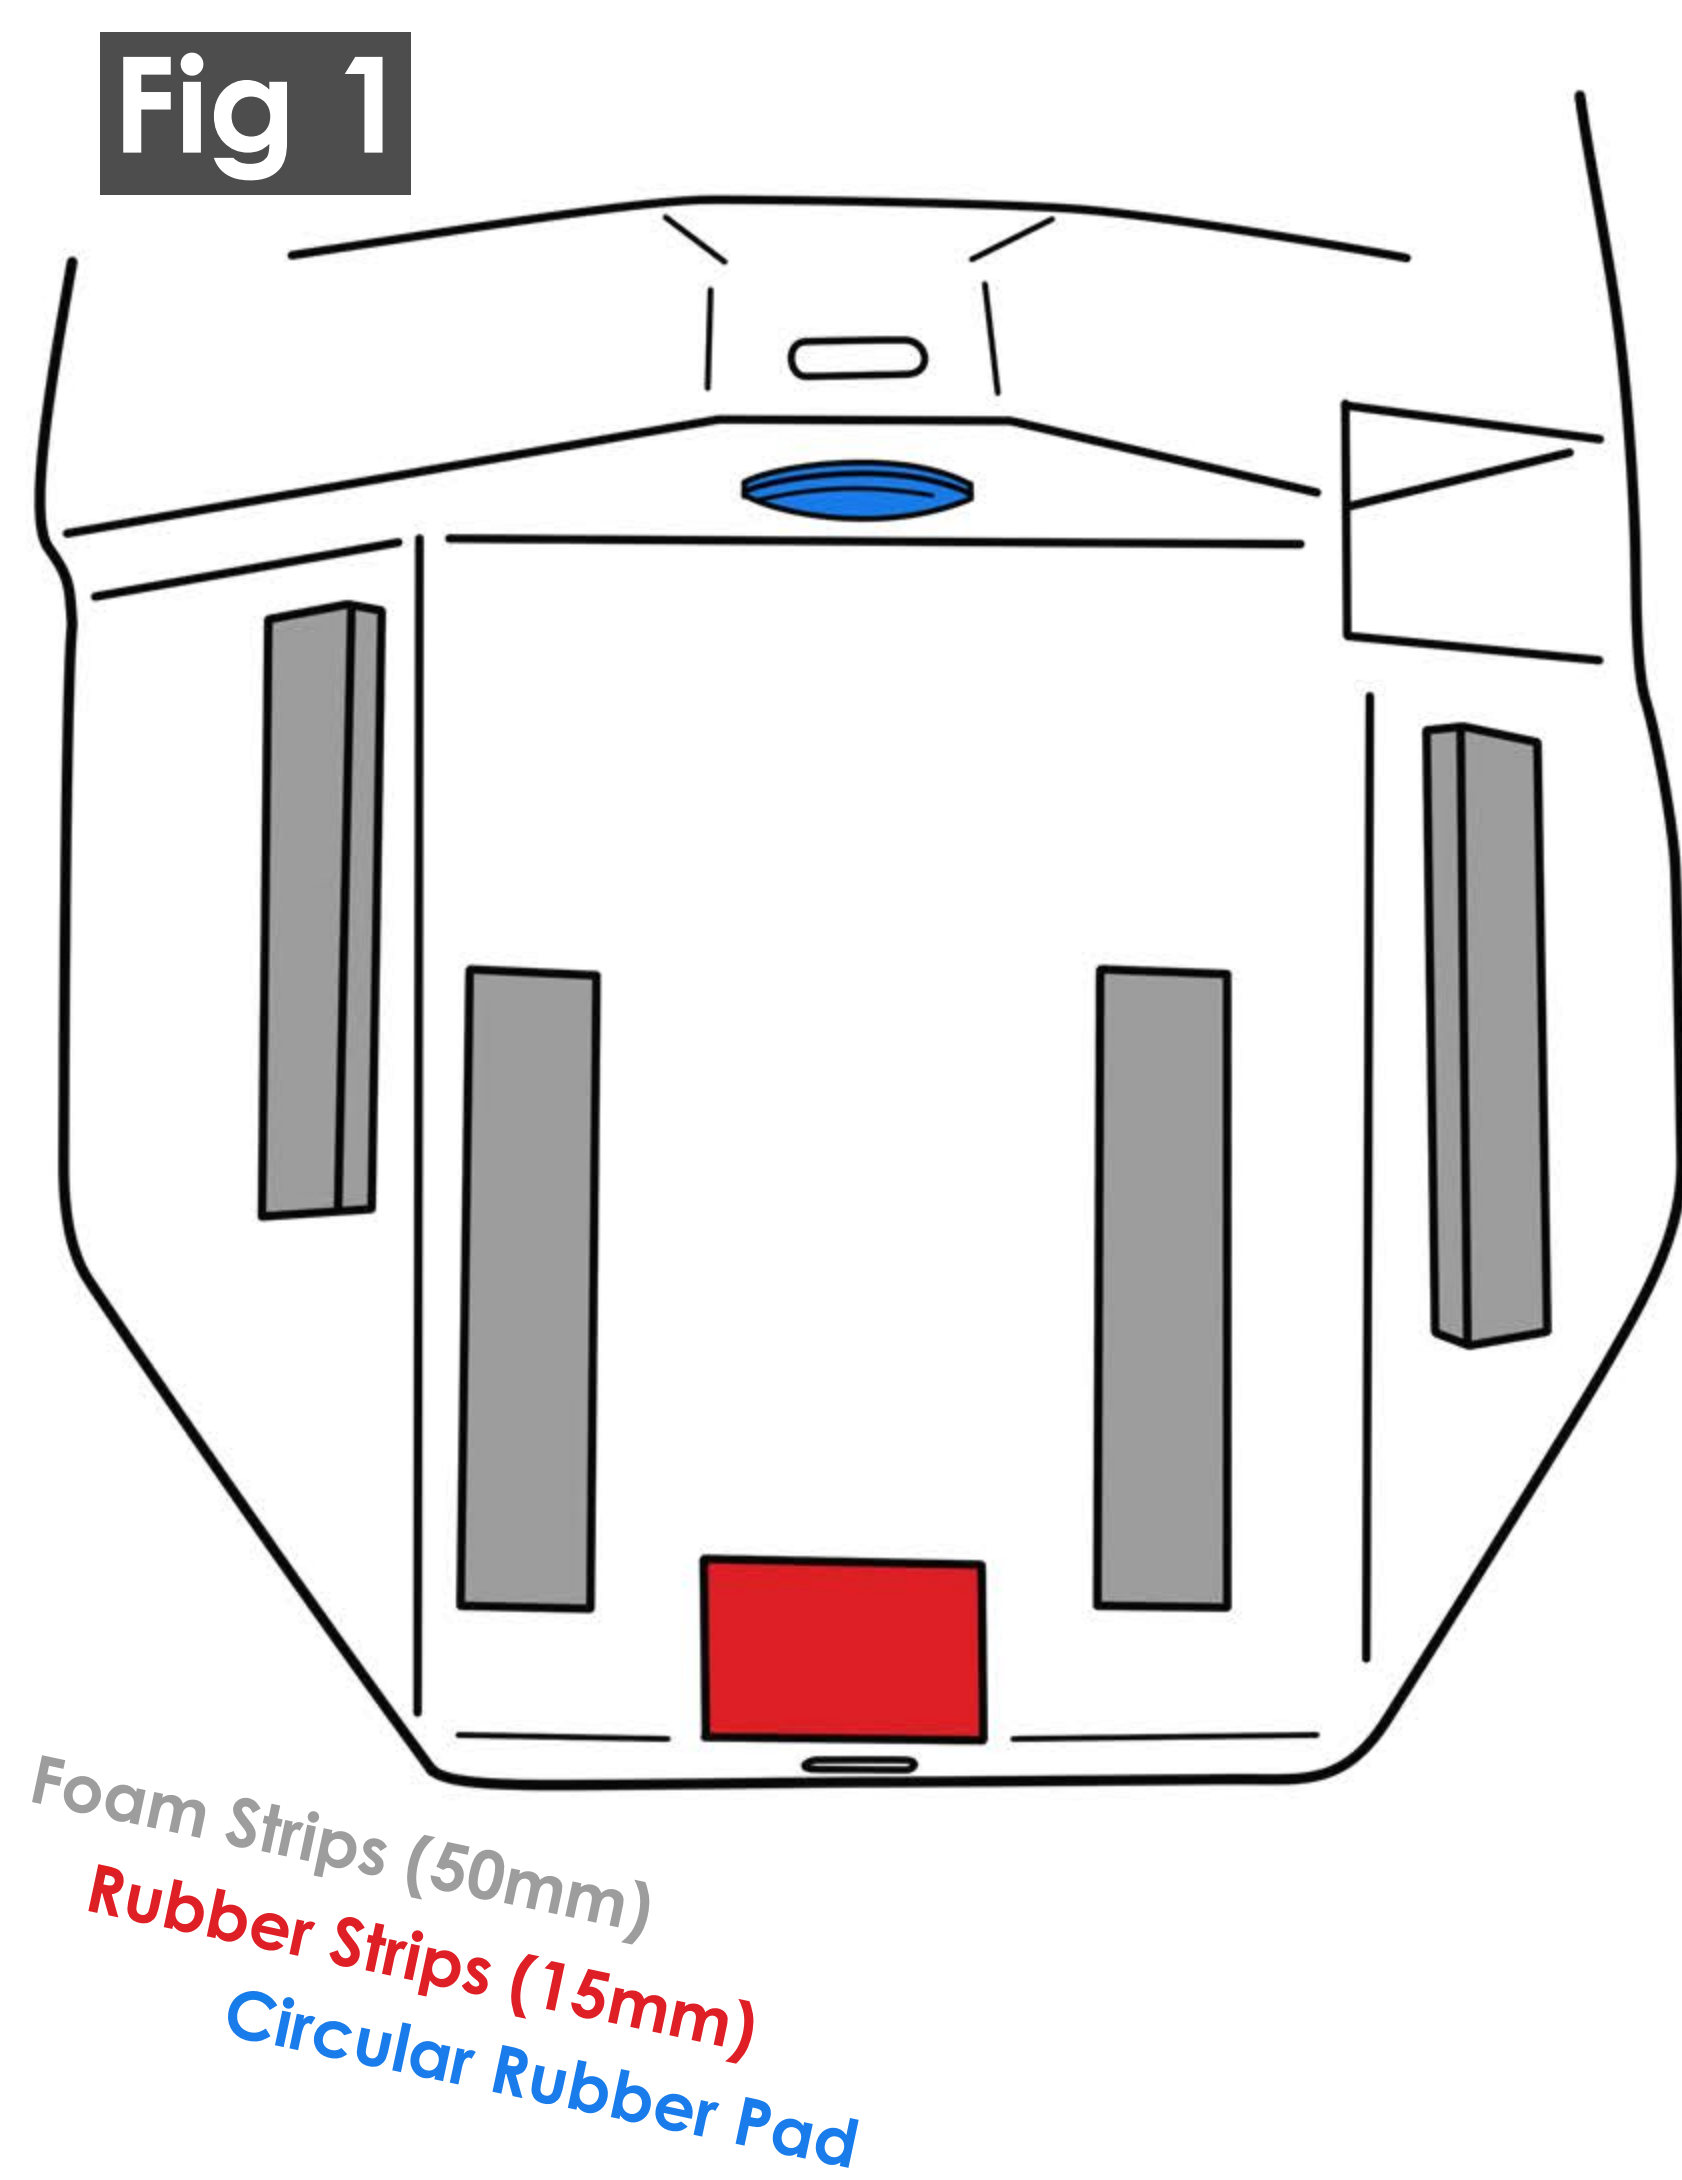

Any questions?
sales@pyramid-plastics.co.uk
01427 677990
www.pyramid-plastics.co.uk

Follow us on social media and
feel free to leave us a review

