



WET-LOOK

PENETRATING SURFACE SEALER

PRODUCT
DATA SHEET

DESCRIPTION: Wet-Look is a penetrating, color-enhancing stone and masonry sealer; hybrid acrylic, low VOC, low odor.

Typical Uses:

- ✓ Pavers
- ✓ Exposed Aggregate
- ✓ Sandstone
- ✓ Concrete
- ✓ Brick
- ✓ Stamped Concrete
- ✓ Unglazed Tile
- ✓ Slate
- ✓ Chattahoochee

Important: Read all directions thoroughly. Recommended: Wear gloves, safety glasses, and protective clothing.

SURFACE PREP*: All surfaces must be clean, dry and oil-free. For oil stains, use a degreaser or SEAL-KRETE Oil Stain Remover. Do not apply to painted or stained surfaces. Do not apply over solvent or oil-based stains. Make sure all cure and seal compounds have been removed. Repair all cracks and surface breaks. Cover windows, doors, etc., prior to application. Use caution when applying on windy days. Remove any overspray immediately with water. New concrete must cure for a minimum of 30 days.

APPLICATION: Read "LIMITATIONS" section before use. This sealer is ready to use; do not dilute. Do not apply if rain is expected within 24 hours. Temperatures should not fall below 50°F (10°C) within 24 hours of application. Apply to porous, bare, uncoated concrete and masonry surfaces only. Etch smooth-finished concrete (such as patios or porches) with a concrete etching solution like SEAL-KRETE Clean-N-Etch. Apply until saturated using a brush, roller (3/8" nap), or low-pressure garden sprayer. Apply first coat, backrolling any puddles, and let dry 4 hours. Apply a second coat to maximize protection. Backroll to remove any puddles. On vertical surfaces, apply from the bottom up and saturate well. To improve slip resistance on horizontal surfaces, add SEAL-KRETE Clear Grip.

COVERAGE: 150–400 sq. ft. per gallon, depending on surface porosity.

DRY TIME: Allow surface to dry 24 hours for light foot traffic. Will accept vehicular traffic in 72 hours. Measured at 77°F (25°C) 50% RH.

CLEAN-UP & STORAGE: Clean all application tools immediately after use with soap and water. Do not store at temperatures below 50°F (10°C). KEEP FROM FREEZING.

MAINTENANCE: Remove all oil and gas spills as soon as possible. Clean occasionally with a mild soap and water solution. Do not use solvent, citrus or oil-based cleaners. If needed, scrub surface with a soft bristle or shop broom. Rinse with a garden hose or power washer (less than 1200 psi) held at least 18 inches from the surface, using a fan spray pattern.

LIMITATIONS: Do not apply when the temperature of the surface to be coated is less than 50°F (10°C) or when temperature is expected to drop below 50°F (10°C) within 24 hours. Do not apply in wet or rainy conditions or if rain is forecast within 24 hours. Do not use below grade. Do not apply to glazed, non-porous or previously painted surfaces or as a sealer over chip or flake garage floors. Approved for vehicular traffic when applied to porous pavers only. Do not apply over solvent or oil-based sealers.

WARNING! IRRITANT! HARMFUL IF SWALLOWED. MAY CAUSE EYE, NOSE AND THROAT IRRITATION. AVOID CONTACT WITH SKIN AND EYES AND AVOID BREATHING OF VAPORS AND SPRAY MIST. WEAR EYE PROTECTION AND PROTECTIVE CLOTHING. To avoid breathing vapors open windows and doors or use other means to ensure fresh air entry during application and drying.

FIRST AID: For Eye Contact: Flush with water for 15 minutes. **For Skin Contact:** prolonged contact may cause irritation. Wash affected area with soap and water. **If Swallowed:** Do not induce vomiting – seek immediate medical attention. **Inhalation:** If headache or nausea is experienced, remove the individual to fresh air. If symptoms persist, seek medical attention.

CAUTION: KEEP OUT OF REACH OF CHILDREN – DO NOT TAKE INTERNALLY

**Sanding or removing paint containing lead may be hazardous. For information contact the National Lead Information Center at 1-800-424-LEAD or www.epa.gov/lead.*

**ADVANCED NANOTECHNOLOGY
LASTS 4X LONGER THAN OTHER WET-LOOK SEALERS**



Product	No.	Unit	UPC Code	Carton Bar Code	Carton Size (W x D x H)	Cube / Wt. (cubic ft / lbs)	Carton Qty	Pallet Qty
Wet-Look	603001	1 gallon	0 15944 60301 9	1 00 15944 60301 6	15 x 9.5 x 13	1.07 / 36.63	4	36 cs
Wet-Look	603005	5 gallon	0 15944 60305 7	–	–	1.30 / 45.17	1	36 ea



WET-LOOK

PENETRATING SURFACE SEALER

- EXCELLENT DURABILITY
- INTERIOR/EXTERIOR USE
- FOR POROUS UNCOATED SURFACES

TECHNICAL INFORMATION

- Clean-up: soap and water
- Shelf life: 2 years min. (closed container)
- Visual appearance: milky white (wet); dries clear
- Gloss: >10 (2 coats)
- Gloss retention: excellent
- Tire marking: resistant to most tires on porous surfaces
- Proprietary hybrid acrylic
- ASTM G-53 ultraviolet resistance: excellent
- ASTM D-1640: dry-to-touch 30 min; dry to recoat 4 hours; dry to light foot traffic 24 hours; dry to vehicular traffic 72 hours
- ASTM D-3359B intercoat adhesion: excellent
- ASTM D-3363 Konig hardness: 25
- VOC <100 g/L – EPA Method 24 (less water and exempt solvent) – Waterproofing Sealer Category

CHEMICAL/SOLVENT RESISTANCE - ASTM D-1308

(One hour spot test)

- Gasoline: resistant
- Oil: resistant
- Water: resistant
- Salt: resistant
- Chlorine: resistant

FEATURES

- Seals and protects bare concrete
- Seals in color
- Clear finish, will not yellow
- Premium, hybrid acrylic formula

LIQUID PROPERTIES

- Water-Based
- Odor: Low

LIMITED WARRANTY: Manufacturer/Seller makes no warranty of any kind except that this product is free from defect and is of merchantable quality. Buyer remedy for breach of warranty is limited to replacement of SEAL-KRETE product or refund of purchase price. Convenience Products will not be responsible for labor or the cost of labor for removal or application of any product.

TECHNICAL SUPPORT: For more information on surface prep or application guidelines, or to obtain a Material Safety Data Sheet, call 1-800-323-7357, M-F (8:00 am-5:00 pm EST) or visit our website at www.seal-krete.com.

SEALS PROTECTS AND BRINGS OUT NATURAL COLORS

REPELS OIL, GREASE & WATER

UV RESISTANT, NON-YELLOWING


ONE COAT, DRIES FAST




Natural Stone



Slate

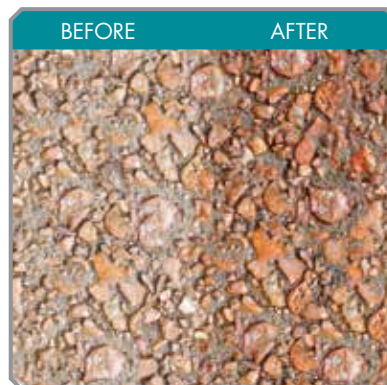

Chattahoochee

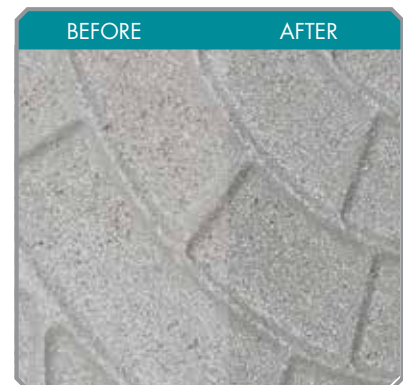

Stamped Concrete



11 Hawthorn Pkwy. Vernon Hills, IL 60061

Questions or comments? Call 1-800-323-7357

www.seal-krete.com

©2016 Rust-Oleum Corp

64014-121216-SK