

Data Sheet

Fabric covered sound absorber. 100% polyester 'Friendly Fibre' acoustic core.

Size


Maximum size 2400mm x 1200mm.
Tolerance +4mm/-0mm.

Colours

Wide range of fabrics and colours (Swatches available on request).

Mounting Locations

Walls (Ceiling version available).

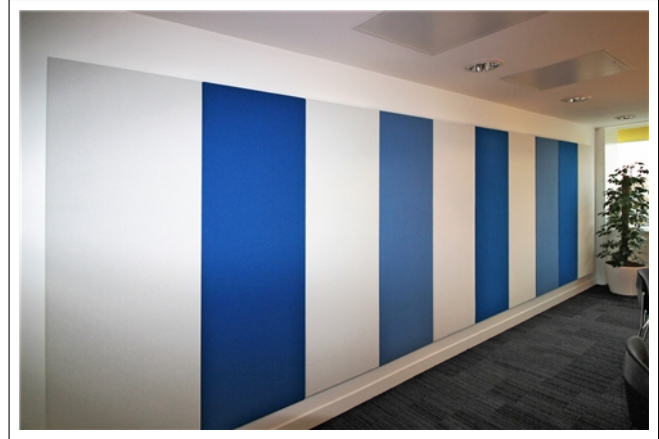

Technical Information

Impact

Highly durable and impact resistant.
Impact Resistance: EN13964:2004 Class1A; not adversely affected at impact velocities over 16.5m/s

Material

Friendly fibre absorber material.
-100% Polyester. (PET)
-Non-irritant and Non-allergenic.
-Odour free.
-VOC Emissions: Low VOC (VOC Concentration 0.01 mg/M3).

Fire

Fire resistant to Euroclass B (dependent on fabric choice).


Flexi Backed

Optional Flexi backing (hook and loop compatible).

Usage

Suitable for schools, commercial and home use.

Performance

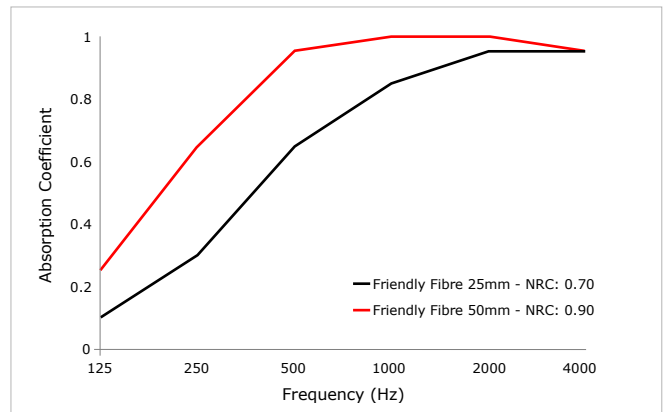


Frequency (Hz)	125	250	500	1000	2000	4000	NRC
Friendly Fibre 25mm	0.10	0.30	0.65	0.85	0.95	0.95	0.70
Friendly Fibre 50mm	0.25	0.65	0.95	1.00	1.00	0.95	0.90


Class A / broadband sound absorption (dependant on thickness).

Style Options


Size

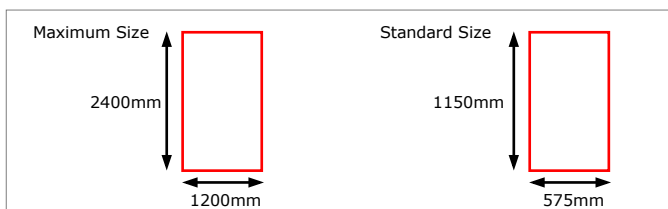


Thickness

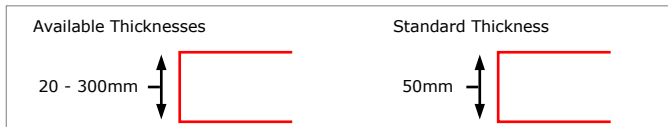

Finish

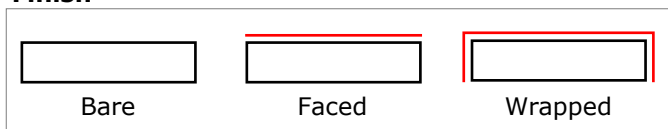

Shape

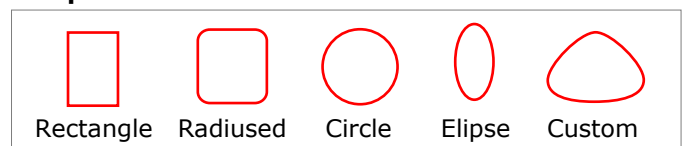

Edge Type



Mounting Method

Wall Clips | Wall Hook and Loop | Grab Adhesive
Ceiling mountings are available

Please note, certain style combinations may not be possible. Contact us for guidance.