

Installation Guide


Supported Products

QR Diffuser


NOTE: We cannot guarantee the supplied fixings are suitable for all walls and ceilings. We recommend you consult a professional before you proceed.

- 1 Cut each hook and loop strip into 4 No. 3cm segments.


Separate the hook strips from the loop strips.

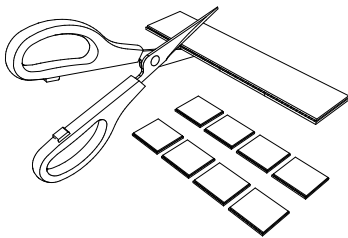

- 2 Remove backing from hook strips and fix to reverse side of panel at the locations indicated

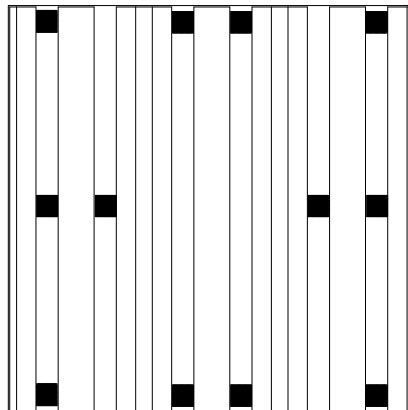

- 3 Fix loop strips to the wall in the location you want to put the QR Diffuser, make sure to align the loop strips to the hook strips on the panel.

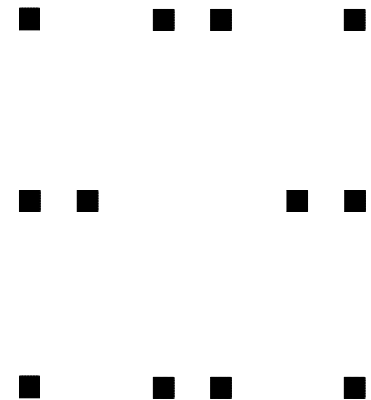


Allow 48 hours for glue on all strips to set before hanging QR Diffuser.


- 4 It is essential to also use the provided screws when fitting to a ceiling.

For best results on walls and ceilings use screws in conjunction with hook and loop strips.

When using screws, always drill 5mm pilot holes through the QR Diffuser.

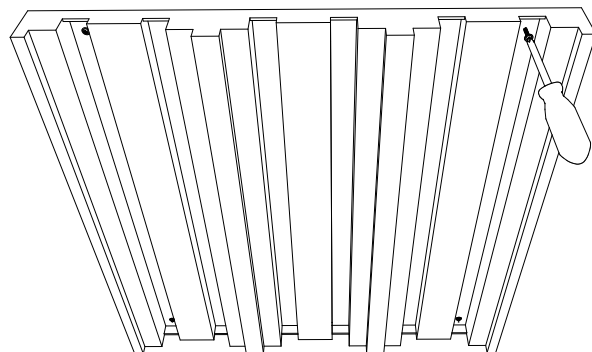

Package Contents

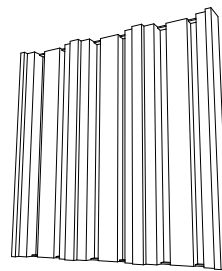

← 2 x QR Diffuser



← 8 x Wall Plugs



← 8 x Black 25mm Screws



← 6 x 12cm Hook and Loop Strips

For Larger or custom panels you may need to increase the number of fixings