


PIGEON
PIGEON CORPORATION
4-4, Nihonbashi Hisamatsu-cho,
Chuo-ku, Tokyo 103-8480 JAPAN
www.pigeon.com
MADE IN CHINA
CODE NO: 17499



MANUFACTURED
IN COMPLIANCE WITH
BS EN 60335-1:2002
BS EN 60335-2-15:2002
220-240V a.c. - 50-60Hz 500W

pigeon

Multi-function Sterilizer 17499 Instruction Manual



9 minutes fast sterilization



Sterilizer + Bottle Warmer
+ Food Warmer



Auto switch-off feature



Sterilizer + Bottle Warmer + Food Warmer

PIGEON Multi-function Sterilizer is specially designed for the convenience of modern mothers by having 3 functions – Sterilizer, Bottle Warmer and Food Warmer, integrated in a single appliance. It can sterilize nursing bottles quickly, keeps milk warm and the food steamer helps to prepare food conveniently. All 3 functions are integrated to give parents more quality time to bond with baby and takes up less space at home.



Multi-Function Sterilizer

CONTENTS

○ Features	3
○ Parts Information	
○ Parts & Specifications	4
○ Control Panel & LED Display	5
○ How To Use	
○ Sterilization	6
○ Bottle Warming	8
○ Food Steaming / Warming	11
○ Cleaning & Maintenance	14
○ Caution & Warning	15

Multi-function Sterilizer

Sterilizer / Bottle Warmer / Food Warmer



Steam Sterilization

Steam Temperature: 98°C-100°C

- Effectively kills bacteria
- Safety tested
- Accommodates up to 5 Standard-size or Wide-neck Bottles
- Large convenient Accessory Tray
- 9 minutes sterilization cycle

Food Warming

Warming Temperature: 70°C

- Keep food warm at desired temperature
- Adjustable timer / temperature

Steam warming does not destroy the nutritional contents in food such as vitamins and minerals, unlike microwave warming.





Bottle Warming

Warming Temperature: 40°C

- Keep bottle warm at desired temperature
- Adjustable timer / temperature
- Fits all size of feeding bottle
- Preserves nutrients in breastmilk when warming (40°C is strongly recommended)

Parts Information

Parts & Specifications

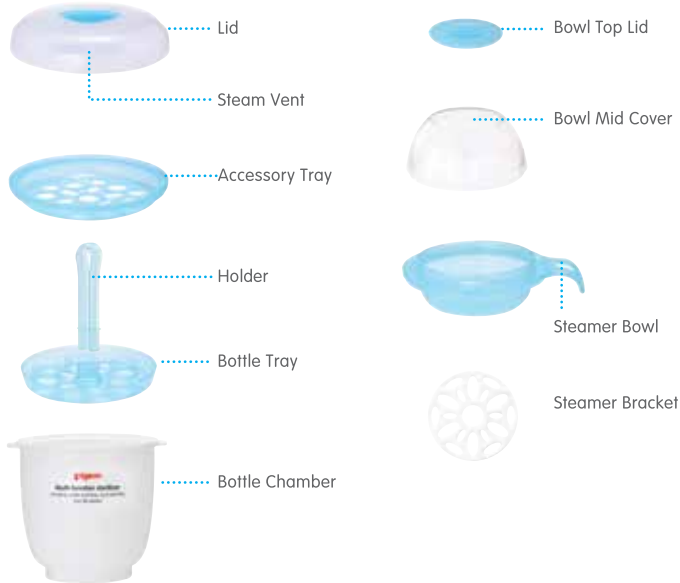


SPECIFICATIONS

Voltage:	AC 220V-240V, 50Hz-60Hz
Power Consumption:	500W
Sterilization Time:	≈ 9 Minutes (based on 70ml)
Temperature Range: (Bottle Warming)	35°C - 45°C
Temperature Range: (Steaming/Warming)	50°C - 90°C
Available Time Range: (Bottle Warming)	1 Minute - 8 Hours
Available Time Range: (Steaming / Warming)	1 Minute - 2 Hours
Usage Conditions:	-5°C - 39°C, Density: 40% - 90%

Parts Information

Control Panel & LED Display

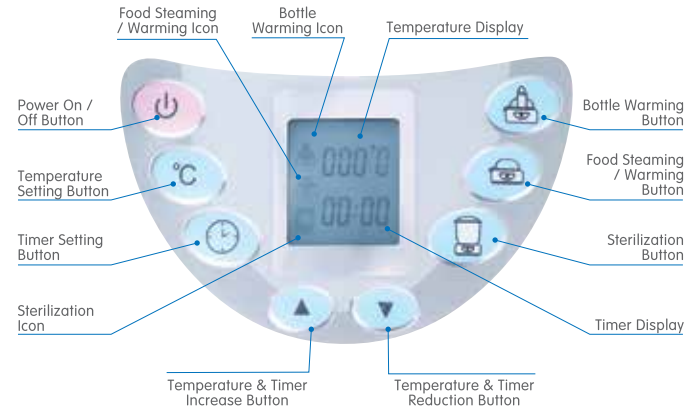

Power On / Off Button Press once to activate power and once more to deactivate power.

Temperature Setting Button Located between the Bottle Warming icon and Food Steaming / Warming icon, press this button to access the Temperature Setting Interface.

Timer Setting Button Located below the Food Steaming / Warming icon and Sterilization icon, press this button to access the Timer Setting Interface.

Temperature & Timer Increase & Decrease Buttons While at Temperature or Timer Setting Interface, press the Up or Down arrow to adjust the values.

Bottle Warming Button Press once to enter Bottle Warming mode.

Food Steaming / Warming Button Press once to enter Food Steaming / Warming mode.

Sterilization Button Press once to enter Sterilization mode.

LED Display Screen The Display Screen will light up when in use and shows the mode used, temperature setting as well as timer.

How To Use

Sterilization Process

step

1

Secure Bottle Chamber to Heating Base and pour approximately 70ml of clean water into the Bottle Chamber.

*Always use clean water to minimize water sediments clotting the heater unit.



step

2

To sterilize bottles, invert the bottles and place them onto the Bottle Tray.

Lower the Bottle Tray into the Bottle Chamber using the Tray Holder.



step

3

To sterilize baby accessories such as nipples, pacifiers, teething rings etc, place them onto Accessory Tray.



Fully assembled sterilizer, ready for sterilization process.

Note: When a mode is in progress, pressing another mode button will automatically activate the new mode.



step

4

Place the Accessory Tray onto the Bottle Chamber and secure Lid well.



step

5

Connect the plug to power source.

Press and hold (about 1 second) the Switch On / Off Button to switch on the unit to commence use.

The LED Display Screen, when activated, will reflect the current temperature of the Heater Plate.

*The LED Display Screen will auto-off when inactive for more than 5 minutes.



step

6

Press the Sterilization Button. LED Display Screen will display the Sterilization icon and upon reaching temperature at 100°C, sterilization will start.

When all the water has evaporated (about 9 mins), the LED Display Screen will turn off followed by the sound of 5 beeps. Do not open the Lid immediately. Wait for at least 5-10 mins to ensure steam has escaped.



How To Use

Bottle Warming

step 1 Place the Steamer Bracket over the Heating Plate as shown in the diagram.



step 2 Pour 300ml of water onto the Heating Base.



step 3 Place the Bowl Mid Cover over the Heating Plate as shown.



step 4 Place the Bottle onto the Steamer Bracket through the opening of the Bowl Mid Cover as shown.



step 5 Connect the plug to power source.

Press and hold (about 1 second) the Switch ON/OFF Button to switch on the unit to commence use.

The LED Display Screen, when activated, will reflect the current temperature of the Heating Plate.

*The LED Display Screen will turn off when inactive for more than 5 minutes.



step 6 Press the Bottle Warming Button.

LED Display Screen will display the Bottle Warming icon and default Bottle Warming temperature of 40°C.

Bottle Warming will start immediately.

*To stop Bottle Warming, simply press the Switch On/Off Button.



step 7 To adjust to your preferred temperature (35°C - 45°C), press the Temperature Setting Button.

The current temperature will blink on the LED Display Screen.

Simply press the Increase or Decrease Buttons to set your preferred temperature.

Upon 5sec of inactivity, the blinking will stop and unit will take the last temperature setting by default.

*To return to default temperature of 40°C, simply press the Bottle Warming Button.

step 8

To adjust to your preferred warming time (1min - 8hrs), press the Timer Setting Button.

Hour: Min

The timer display 00:00 will blink.

Press the Increase or Decrease Buttons to set your preferred hour setting.

To set in minutes, simply press the Timer Setting Button again.

Upon 5sec of inactivity, the blinking will stop and unit will take the last time setting by default.

*Upon reaching the preferred time setting, the unit will shut off automatically followed by 5 beeps.

Note: When a mode is in progress, pressing another mode button will automatically activate the new mode.

Unit will stop warming and auto-off upon reaching the desired time set.



How To Use

Food Steaming / Warming

step 1

To steam or warm up food, pour 150ml of water onto the Heating Plate.



step 2

Place the food to be steamed / warmed into the Steamer Bowl.

Place the Steamer Bowl onto the Heating Base as shown.



step 3

Place the Bowl Mid Cover over the Steamer Bowl.



step 4

Place the Bowl Top Lid over the Bowl Mid Cover.



step

5

Connect the Plug to power source.
Press and Hold (about 1 second) the Power On / Off Button to switch on the unit to commence use.

The LED Display Screen, when activated, will reflect the current temperature of the Heating Plate.

*The LED Display Screen will turn off when inactive for more than 5 minutes.



step

6

Press the Food Steaming / Warming Button.

LED Display Screen will display the Food Steaming / Warming icon and the default temperature of 70°C.

Steaming / Warming will start immediately.

*To stop Food Steaming / Warming, simply press the Power On/Off Button.



step

7

To adjust to your preferred temperature (50°C - 90°C), press the Temperature Setting Button.

The current temperature will blink on the LED Display Screen.

Simply press the Increase or Decrease button to attain your preferred temperature.

Upon 5sec of inactivity, the blinking will stop and unit will take the last temperature setting by default.

*To return to default temperature of 70°C, simply press the Food Steaming/Warming Button.



*To return to default temperature of 70°C, simply press the Food Steaming / Warming Button.

step

8

To adjust to your preferred warming time (1min - 2hrs), press the Timer Setting Button.

Hour : Min

The timer display 00:00 will blink.

Press the Increase or Decrease button to set your preferred hour setting.

To set in minutes, simply press the Timer Setting Button again.

Upon 5sec of inactivity, the blinking will stop and unit will take the last time setting by default.

*Upon reaching the preferred time setting, the unit will shut off automatically followed by 5 beeps.

**Note:**

When a mode is in progress, pressing another mode button will automatically activate the new mode.



Unit will shut off automatically upon reaching the desired time set.

Cleaning & Maintenance

To maintain the quality of the sterilizer and Heating Plate, simply follow **A, B & C**.

A. Daily Cleaning:

1. After using, remove the plug from its power source.
2. Use a wet cloth to clean the heating plate.
3. Remove remaining water from the equipment and dry clean with a piece of cloth.
4. DO NOT immerse the Heating Base in water.

B. Weekly Maintenance:

Lemon Juice Cleaning

Preparation:

- Half fresh lemon
- Clean soft cloth
- Mug

Steps:

1. Switch OFF sterilizer.
2. Extract lemon juice into a mug.
3. Pour into the sterilizer without boiling.
4. Leave it to stay for 30 minutes.
5. Use a soft cloth to remove remaining limescale.
6. Drain and rinse sterilizer with clean water.

C. Monthly Maintenance:

Vinegar and Water Cleaning

Preparation:

- Clean soft cloth
- 25ml of vinegar
- 50ml of water (Ratio 1:2)

Steps:

1. Mix 1 part vinegar to 2 parts water.
2. Pour mixture into heating plate of Heating Base, switch on sterilizer to boil for 1 minute.
3. Switch OFF the main power and leave sterilizer to stand for about 3 minutes.

CAUTION: Combined mixture is HOT.

4. With a clean thick soft cloth, wipe off any remaining stain or limescale.
5. Drain & rinse sterilizer to wash away vinegar.
6. Pour 70ml of clean water, switch ON to run a full cycle with clean water.
7. Switch OFF the main power, rinse and wipe clean the sterilizer.

Caution & Warning

CAUTION: Read the instruction manual carefully before use and follow closely to the instruction given.

- Place the Heating Base on a flat and steady surface. Ensure that the powder cord sits perfectly into the power socket (can be found at the base) so that the Heating Base is stable when you put on a flat surface.
- Before sterilization, ensure that the Steam Vent (can be found on the Lid) is facing inwards / away from you, to avoid being scalded by escaping steam.
- During sterilization, steam will be emitted through the Steam Vent. Kindly refrain from covering the Steam Vent.
- Young children should be supervised to ensure that they do not play with the appliance, especially when it is in use.
- Bottle Chamber can be pulled off easily from the Heating Base. So ensure that the Bottle Chamber is fully detached from Heating Base first before moving the Bottle Chamber.
- When removing Bottle Chamber from Heating Base, do take note of dripping water from Bottle Chamber due to condensation of steam.
- This appliance is not intended for use by young children or infirm persons without supervision.
- The appliance is not to be used by children or person with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction.
- If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.
- Do not use corrosive chemicals on any part of the equipment.
- Use only water to clean the equipment to prevent stains.
- Adhere strictly to instructions given. Accidents resulting from misuse will not be borne by our company.
- Keep appliance out of reach from children.

WARNING: Do Not immerse the unit (Heating Base) in water.
Do Not open the Lid during operation.