

DIGIFAV B2

INDUSTRIAL LAMINATOR FOR OFFSET AND DIGITAL

This machine features a user-friendly touch screen interface, quick-load expanding film shaft, high-speed deep pile feeder, automatic balanced temperature, precise pressure adjustments, and accurate overlap control. With the ability to run sheets up to 20.75"x29.5" at speeds up to 72 feet per minute, the DIGIFAV B2 will give you a competitive edge in the print finishing market. This machine is an excellent choice for laminating all thin gauge LAMAPLY™ films and DIGISLEEK™ foiling.

KEY FEATURES


- Load up to 23" in feeder
- Maximum format at 20.75" x 29.5"
- Minimum format at 8.5"x8.5"
- Touch Screen
- Extra blowers on entry
- Air fans on exit
- Auto-load feature

Recommended machine
for FeatherTOUCH™ and
DIGISLEEK™



DIGISLEEK™ module:


Multifunctional devise that allows metallic
foiling, varnishing and spot varnishing.

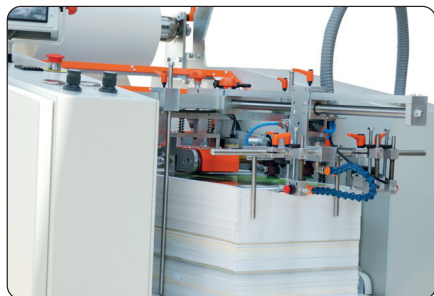

Feeding module



Laminating module

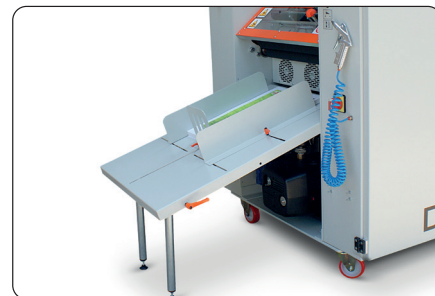

Delivery table with air fans

Description	Specifications
Dimension	83"L x 46"W x 63"H
Max. Laminating Speed	72 ft/min
Sustrate Weight	90 # text / 130 # cover
Power Requirement	220 v
Power Consumption	50 - 60 Hz 8kW

Description	Specifications
Warm Up Time	15 min
Air Compressor	Plant Air
Heating System	Sealed Auto-balance System
Pressure Control	Pneumatic Cylinders
Film Core	3"