

SABAI

Designing the Difference

THE ESSENTIAL CHAIR

Welcome to Sabai

Sabai is designing the difference.

We've minimized your furniture's impact on the environment, from the materials, to the manufacturing process, to programs to extend its life cycle.

Our products are 100% vegan and are made from a combination of recycled, upcycled, and biodegradable materials.

We utilize mechanical fasteners (rather than glue) to ensure that our materials remain recyclable and that we are keeping our manufacturing team safe.



To make sure our furniture stays out of landfills, we've launched two programs under our Sabai Standard: The Repair Don't Replace and Sabai Revive resale programs.

After a simple assembly, you can rest easy with Sabai.


This guide makes assembly a cinch. If you still have questions, you can reach our customer service team at customer@sabai.design and we'll respond within 24 hours.

Components


ARMS X 2

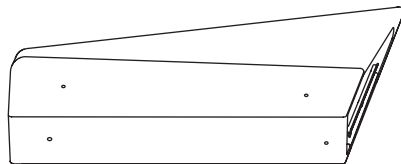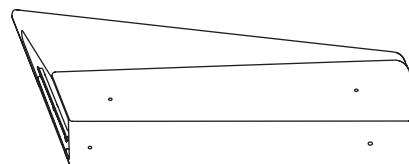**LEFT****RIGHT**

BACK

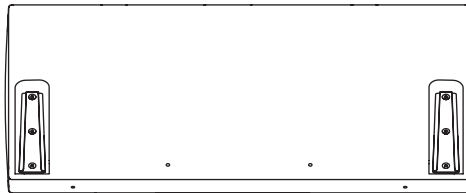



SEAT BASE

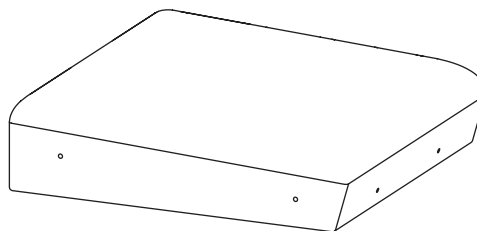

BACK PILLOW




SIDE PILLOWS X 2

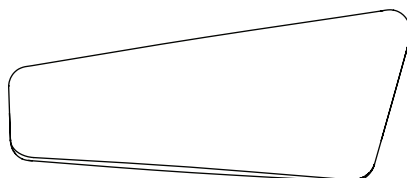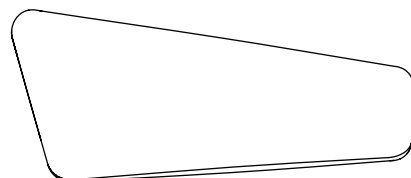
**LEFT****RIGHT**

Components


LEGS
X 2



LEGS + PLATES
X 2

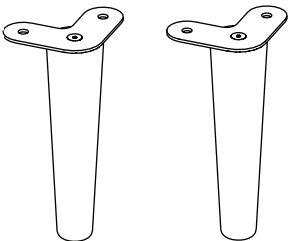


RATCHET WRENCH



METAL BOLTS


X 6 BASE BOLTS
X 4 LEG PLATE BOLTS

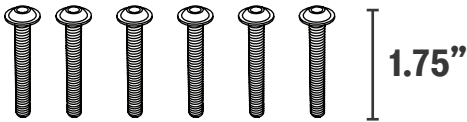


Note: The listed bolt quantity reflects how many bolts are needed for assembly, but you have been provided with extra bolts just in case they're needed.

1 Slide in Arms to Back

- A** Lay the Back piece on its back. Line an Arm up with the Back, with the slanted edge facing the inside of the chair.

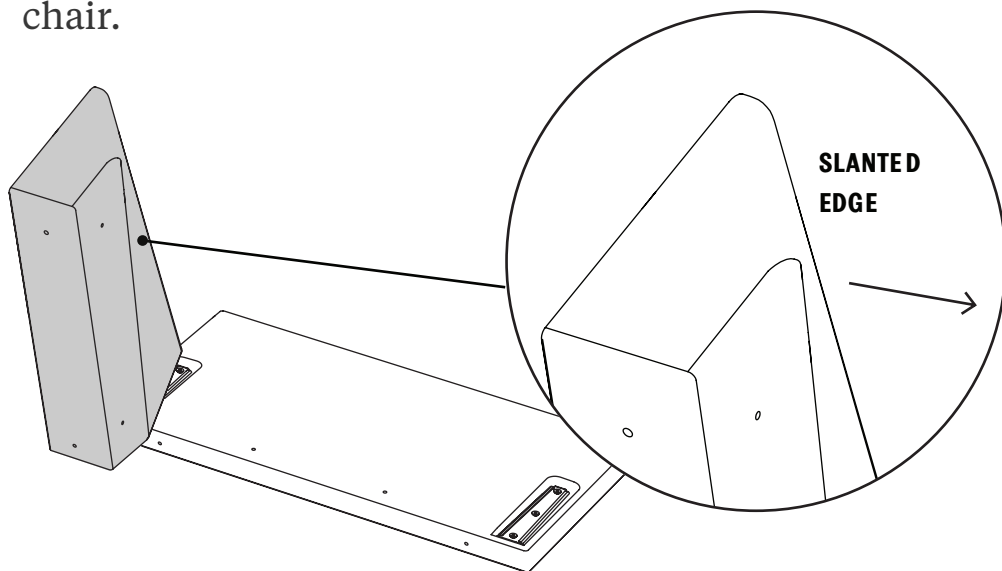

- B** While holding the Back, slide the Arm upwards so that the Arm bracket slides into the Back bracket until you hear the brackets click. Repeat on the other side.

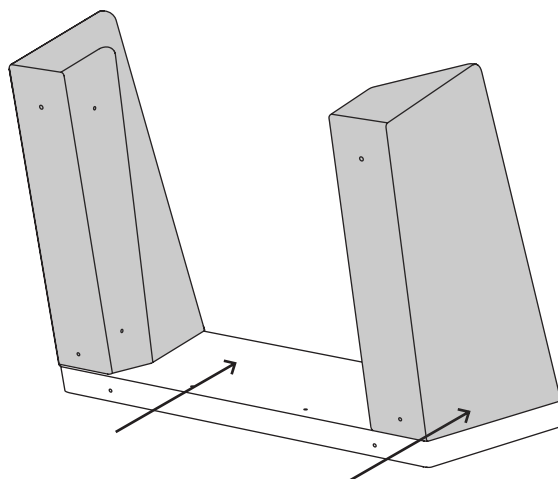

2 Put Seat in Place


A

Place the Seat Base in between the Arms and against the Back. Make sure the bottom of all pieces are flush to each other and the front of the Seat is flush to the fronts of the Arms.

Don't worry if there are any gaps between the Arms and Seat, they will go away once the Bolts are installed!

B

Making sure the holes are lined up, place Base Bolts into the two holes at the back of the Seat Base that attach to the Back piece. Secure bolts by hand without tightening them all the way.

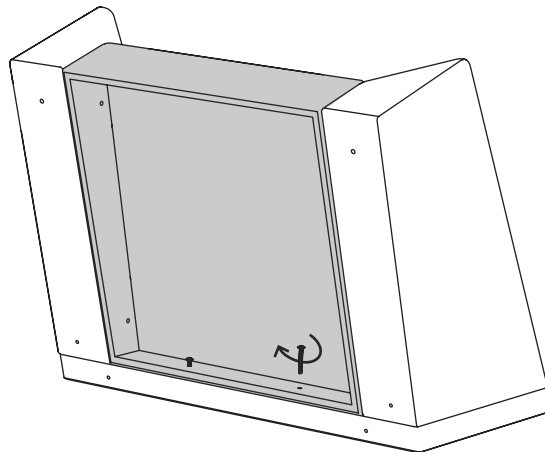


3 Attach Seat

A

Turn the Chair onto one side to attach the Seat Base to the Arm. The weight of the Chair will make it easier to attach the seat base to the Arm that is on the bottom.


Place Base Bolts into the two holes that connect the Seat to the bottom Arm, screw them in by hand.

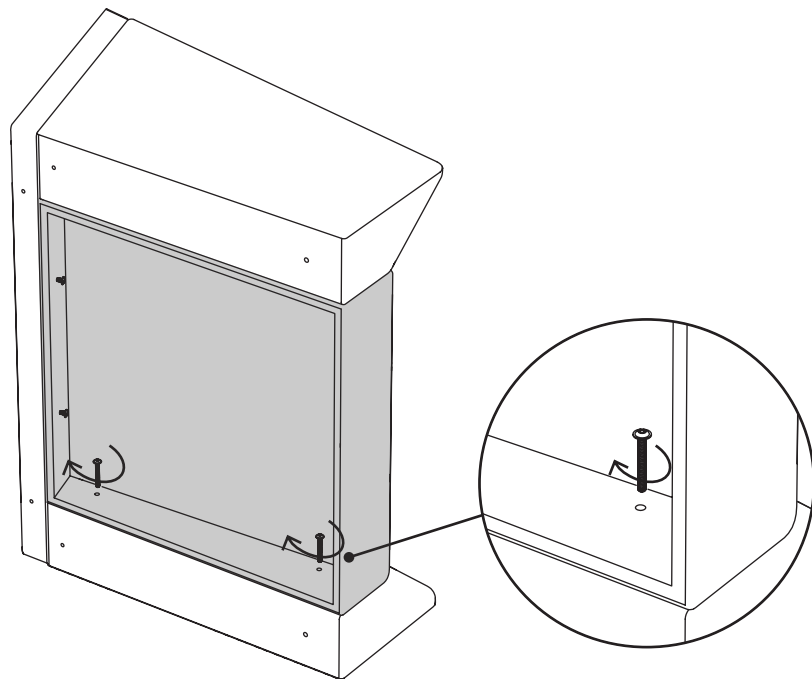

3 Attach Seat

B

Use the Ratchet Wrench to fully tighten the bolts. The Ratchet Wrench allows you to tighten the bolt without having to remove the wrench from the bolt each time you have reached the limit of how far it can go in that direction. Instead, you can simply go back in the opposite direction without moving the bolt and continue tightening. The same applies when you are loosening a bolt. Make sure the switch on the side is flipped down when tightening, and up when loosening. Repeat with the other arm.

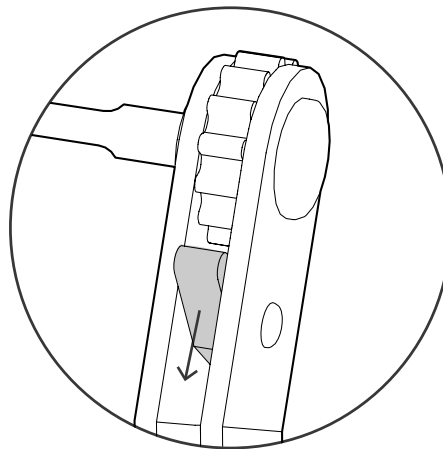


FLIP DOWN = TIGHTEN

FLIP UP = LOOSEN

3 Attach Seat


- C** Flip the Chair over to the other side so that the Arm you have already screwed in is on the top. Place Base bolts into the two holes that connect the Seat to the bottom Arm, screw them in by hand and then use the Ratchet Wrench to fully tighten them.
-

- D** Turn the chair onto its back and fully tighten the two Base Bolts that attach to the Back piece using the Ratchet Wrench.

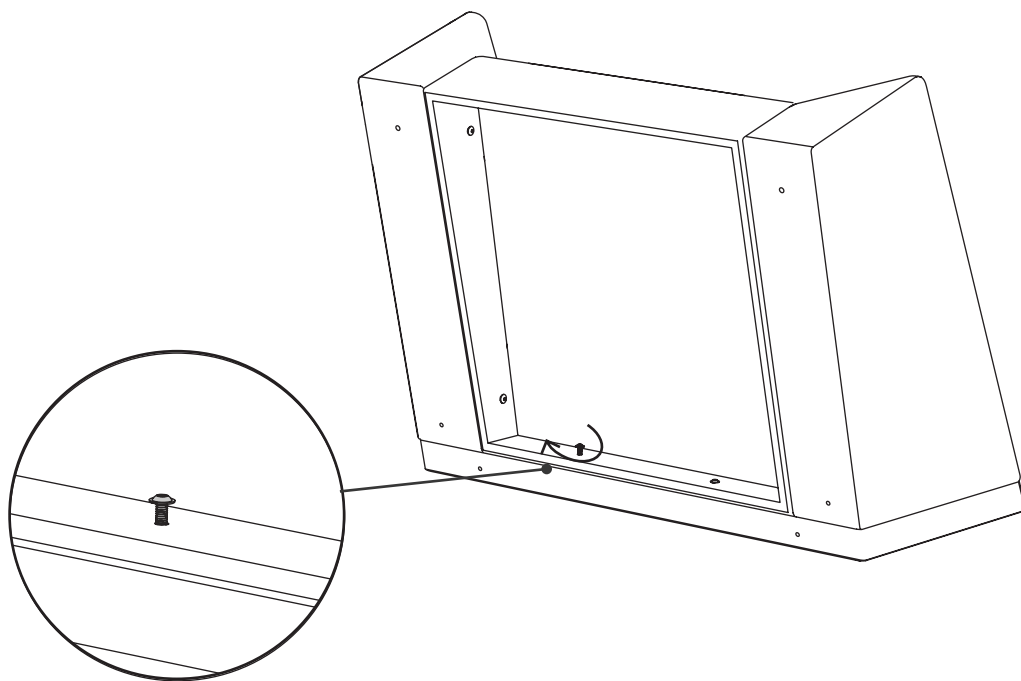


4 Screw in Legs

- A** Screw in the two Legs with protuding bolts into the holes on the from of each Arm.

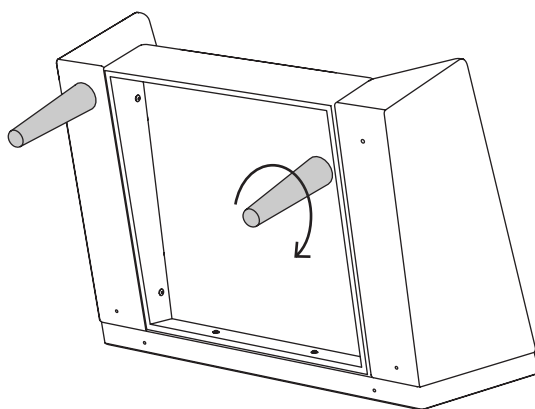


- B** Take the two Legs that are attached to plates and line them up with the holes on the Back and Arms. Use the Ratchet Wrench and Leg Plate Bolts to attach the plates to the base of the Chair.

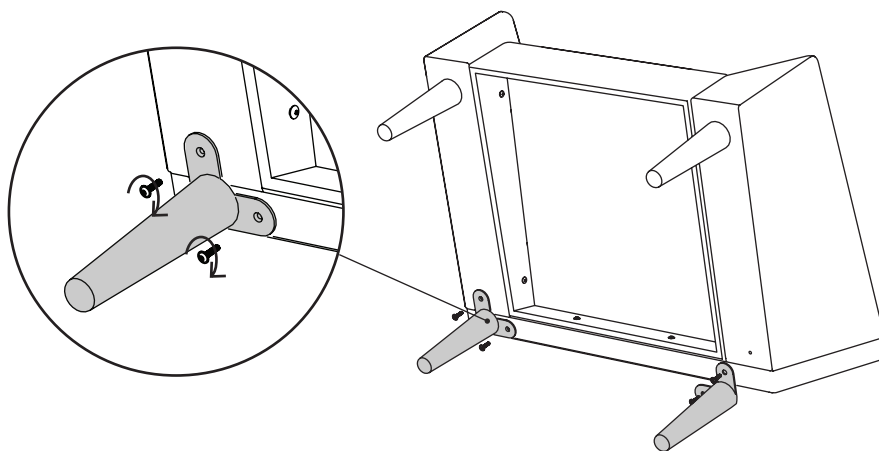

5 Add Pillows

- A** Flip the Chair right side up. Place the Back Pillow at the back of the Chair.

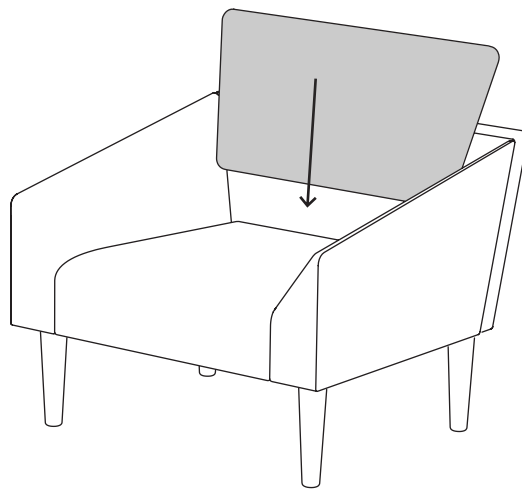

- B** Place one Side Pillow on each side of the Chair, making sure the taller end of the pillows are up against the Back Pillow.

