SABAI

Designing the Difference

Welcome to Sabai

Sabai is designing the difference.

We've minimized your furniture's impact on the environment, from the materials, to the manufacturing process, to programs to extend its life cycle.

Our products are 100% vegan and are made from a combination of recycled, upcycled, and biodegradable materials.

We utilize mechanical fasteners (rather than glue) to ensure that our materials remain recyclable and that we are keeping our manufacturing team safe.


To make sure our furniture stays out of landfills, we've launched two programs under our Sabai Standard: The Repair Don't Replace and Sabai Revive resale programs.

After a simple assembly, you can rest easy with Sabai.


This guide makes assembly a cinch. If you still have questions, you can reach our customer service team at customer@sabai.design and we'll respond within 24 hours.

Components




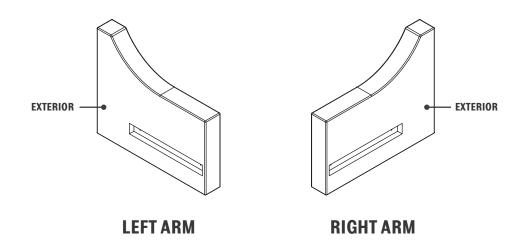

BACKS x3

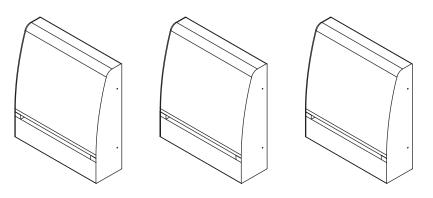



SEAT PLATFORMS X 3

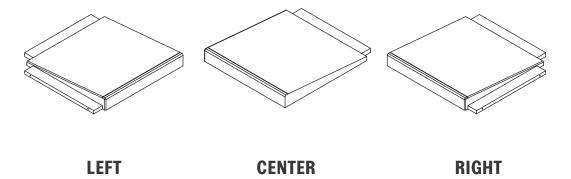

Components


LEGS X 10





SEAT LEGS

X 4

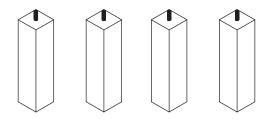


CUSHIONS

X3








SLIPCOVER

X 1 SOFA COVER


X3 CUSHION COVERS

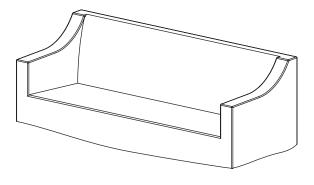



Components

METAL CONNECTOR X 2



RATCHET WRENCH



BOLTS X 16



SEAT BOLTS X 10




Note: The listed bolt quantity reflects how many bolts are needed for assembly, but you have been provided with extra bolts just in case they're needed.

Attach Legs to Backs


Δ

Insert Bolts (2.375") through the hole in each Leg. The head of the Bolt will sit within the with the larger drilled hole once tightened.



B

Lay one Back piece on its back and align two Legs to the holes on the bottom. Screw the Bolts in loosely with your fingers. Repeat for the other two Backs.

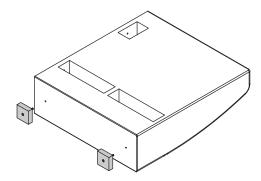


Attach Legs to Backs

C

Tighten both Bolts firmly in place using the Ratchet Wrench. The Ratchet Wrench allows you to tighten the Bolt without having to remove the wrench from the bolt each time you have reached the limit of how far it can go in that direction. Instead, you can simply go back in the opposite direction without moving the bolt and continue tightening. The same applies when you are loosening a bolt.

Make sure the switch on the side is flipped down when tightening, and up when loosening.

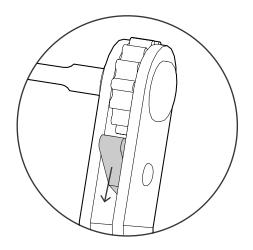



FLIP DOWN = TIGHTEN
FLIP UP = LOOSEN

Attach Legs to Arms

A

Lay the two Arm pieces on their sides and align the Legs to the holes on the bottom. Use the Ratchet Wrench to tighten the bolts firmly in place.

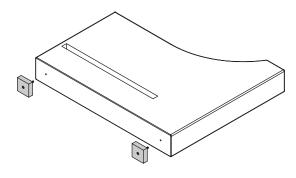


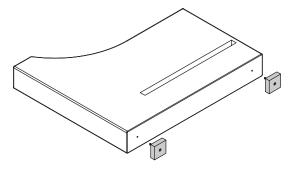

Attach Seat Legs


Δ

Turn the Seat Platforms over and align the Seat Legs to the holes on the bottom. The Left and Right Seat Platform have one leg, while the Center Seat Platform takes two legs.



B


Screw in the Legs, but not all the way in order to leave space for the Metal Connectors.



Connect Seats to Backs

Δ


Align one Seat Platform with the cavity on the front of the Back piece.

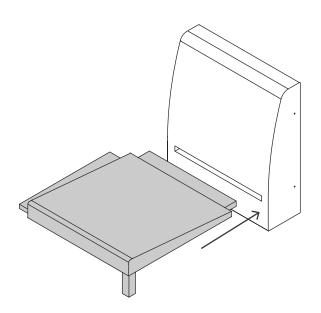

Connect Seats to Backs

B

Move to the back side of the Back and locate the lower cavity. Take two Seat Bolts (1.5") and align them with the holes in the Seat Platform through this cavity, connecting the Seat Platform to the Back. Use the Ratchet Wrench to tighten the bolts in place.

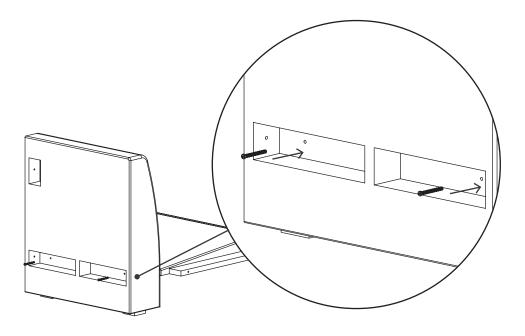


C

Connect the remaining two Seat Platforms to the Backs. Use the Ratchet Wrench to tighten the bolts in place.

Attach Left Arm


A

Locate the Left Arm. Align inner cavity of the Left Arm with the Left Seat Platform.

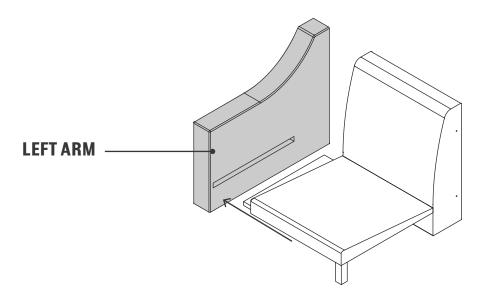

B


Using two Seat Bolts, secure the Left Arm to the Left Seat Platform.

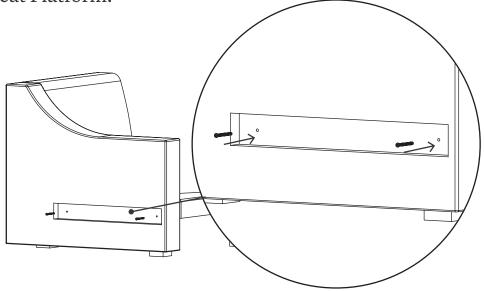

5 Attach Left Arm

C


Locate the cavity on the back of the Left Arm and insert one Bolt (2.375"), aligning with the hole in the Back. Use the Ratchet Wrench to tighten the bolt in place.

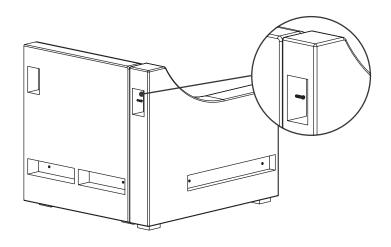

Connect Backs


A

Line up the Left Arm/Back/Seat Platform assembly with the assembled Back and Center Seat Platform.

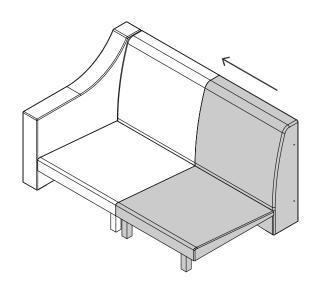

B


Align two Bolts through the back cavity connecting the two Backs. Use the Ratchet Wrench to tighten the bolts in place.

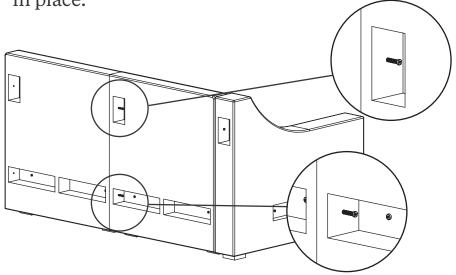

Connect Backs


C

Line up the Right Arm/Back/Seat Platform assembly up with the Center Seat Platform and Back.

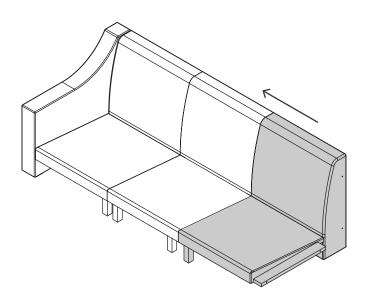

D


Align two Bolts through the back cavity connecting the two Backs. Use the Ratchet Wrench to tighten the bolts in place.

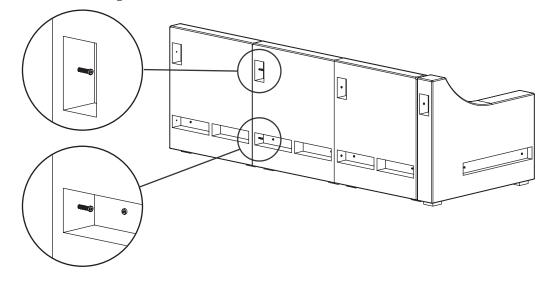

Attach Right Arm


A

Locate the Right Arm. Align inner cavity of the Right Arm with the Right Seat Platform.

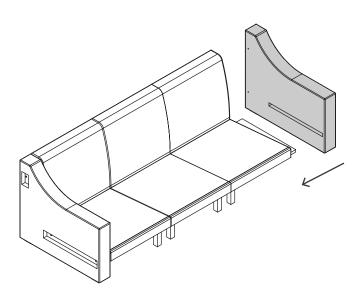

B


Using two Seat Bolts, secure the Right Arm to the Right Seat Platform.

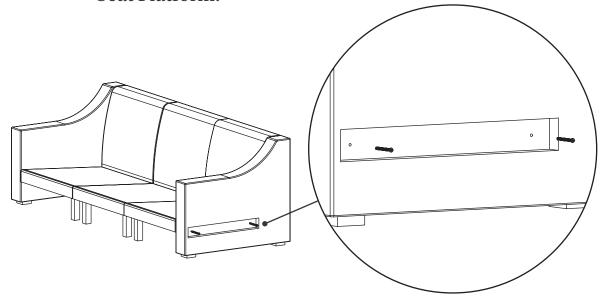

Attach Right Arm

C

Locate the upper cavity on the back of the Back piece that is connected to the Right Seat Platform. Insert one Bolts (2.375"), aligning with the hole in the Right Arm. Use the Ratchet Wrench to tighten the bolt in place.

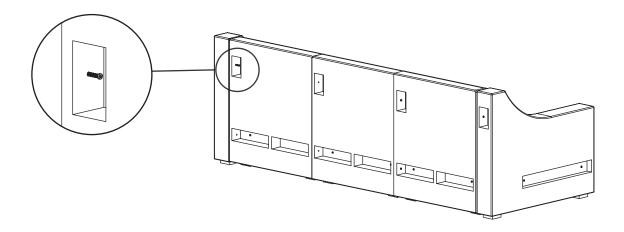


Attach Metal Connectors

A

The Metal Connector is used to connect the two sets of adjacent Seat Legs connected to each Seat Platform. You should have already left the legs slightly unscrewed.

Slide the two Metal Connectors in and tighten all legs.

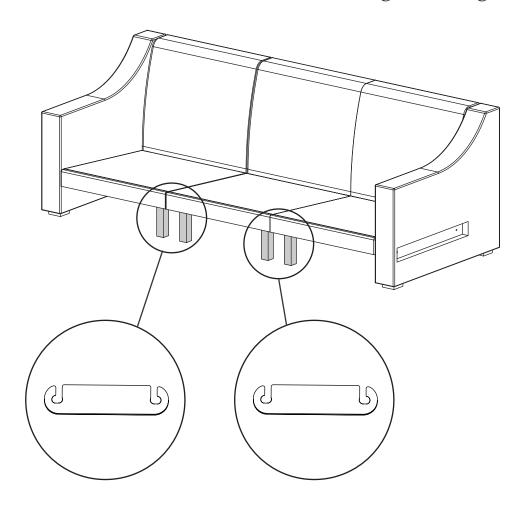


Add Slipcover

Δ

Unfold the Slipcover and locate the two arms. With the slope of the arms facing forward, drape the cover over the Sofa.


Work your way around the Sofa pulling each corner down to hug the Sofa frame.

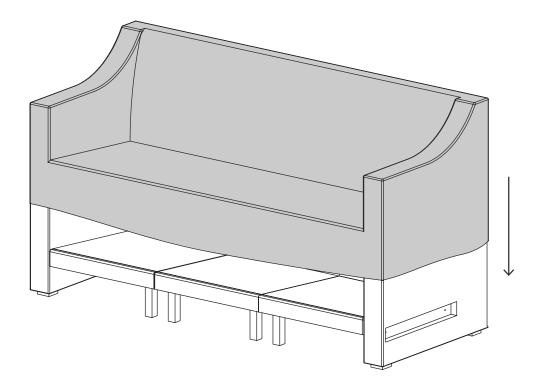

Stuff & Add Cushions

Δ

Stuff each Seat Cushion into the Cushion Slipcovers.

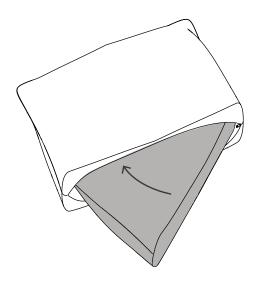

B

Place Cushions on the Loveseat with the zippers facing the back.

