# WIND ALARM

# SKYVIEW the weather company

# WR-3 PLUS

A Wireless Anemometer You Can Trust



# MAX 500 meters



Ultra-Long Wireless Transmission



- Max 500m Ultra-Long Wireless Transceiver
- Audible & Visual Wind Speed Alarm
- Data Recording Up To 1 Year

- Wind Speed, Temp, Air Pressure Sensors
- Hourly Reports & Historical Graphs
- Impact Resistant & Easy to Install

### **Functions**

#### **Instant Wind Speed Alarm**


WR-3 Plus displays the live wind speed value in selectable measurement units (m/s, knots, MPH, km/hr) Users can set a wind speed warning limit on based on local operation safety standards. An audible and visual alarm will be trigger when the limit has been reached. Each sensor has a unique wireless address that can connect to several displays to notify multiple stakeholders on-site.



#### **Data Recording**

WR-3 Plus capture and storage wind speed, temperature, air pressure measurements. 64MB built-in memory and outstanding battery life supports up to 1 year of continuous data recording. (based on 10s logging interval, adjustable: 2s, 5s, 10s, 1min, 5 mins, 10 mins, 60 mins)

The recorded data can be easily export in Excel format further analysis.

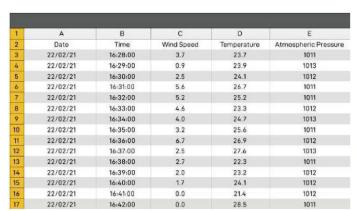




#### **Graphical Display**

The large LCD backlit display with user-friendly interface clearly indicates live weather data in various units of measurement. Users can view hourly wind records and historical bar charts from the past 12 hours on different pages.

- Live Wind Speed
- Average Wind Speed (selectable averaging)
- Maximum Wind Speed
- Ambient Temperature
- Beaufort Bar Graph
- Wind Chill
- Atmospheric Pressure



MAX WS	34.7 m/s	8/20 WIND CHILL	13:27
AVG	5.5	ATP	1019
WS	m/s	PRS	



	16/0	8/20 (	<b>REG</b> 13:	27
m/s	AVG	MAX	TEMP	°C
-01 hr	5.6	10.3	20.1	
-02 hr	5.2	10.9	21.4	
-03 hr	3.6	12.2	19.7	
-04 hr	6.7	16.7	18.6	
-05 hr	1.4	13.3	22.9	~

## Introduction

Cranes operation in windy conditions could create a potentially dangerous situation. The wind forces exerted on both the crane and the load can affect the strength and stability of the cranes. In order to ensure safety during lifting operations, it is very important for the members in the lifting team to know the wind speed and resistance.


The challenge to know the wind speed is the connection between sensor and display. Traditional cabled-anemometer wouldn't work well with the staggering heights among cranes and complex working condition. WR-3 Plus Wireless Anemometer offers a trusted and stable wind measurement solution.

## **Features**

- Max 500m ultra-long wireless transceiver
- Audible & visual wind speed alarm
- Data recording up to 1 year
- Wind speed, temperature, air pressure measurements
- Max 3 years sensor battery life
- IP67 waterproof & impact resistant
- Fast & secure magnetic installation kit

# **Application Areas**

- Cranes & Construction
- Marine, Ports& Offshore
- Film Production & Outdoor Entertainment
- Scaffolding & Temporary Structure
- Rigging & Communications Industry
- Wind Farm & Turbine

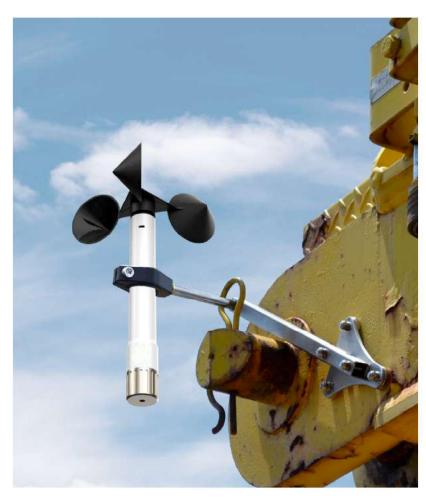







# | Technical Specifications

#### **Wireless Sensor**

Frequency	868MHz(default), 915MHz	
Distance	Max 500m* (depends on the applied environment)	
Data Rate	Every 2 seconds	
Power Supply	3.6V 18505 Lithium battery x1	
Waterproof Rating	IP67	
Weight	406g	
Dimension	262.5 x 183.5 x32mm	

### **Receiver Datalogger**

Receiver Buzzer	> 80dB
Built-in Memory	64MB
Output	.xlxs, .xls
Data Logger	wind speed, temperature, atmospheric pressure
Logging Interval	2s, 5s, 10s, 1min, 5 mins, 10 mins, 60 mins
Power Supply	1.5V AA battery x3, Micro USB port
Dimension	189.6 x 75.6 x 36.3mm
Weight	205g

#### **Wind Speed Sensor**

0.00	and the second s	
	m/s	
Unit	knots	
Offic	MPH	
	km/hr	
Range	0.350 m/s	
	0.1 m/s	
Resolution	0.1 knots	
Resolution	0.1 MPH	
	0.1 km/hr	
Accuracy	±2% FS	

#### **Temperature Sensor**

Unit	°C °F
Range	-30°C60°C
Resolution	0.1°C
	0.1°F
Accuracy	±1°C

### **Atmospheric Pressure Sensor**

	hPa
Unit	mmHg
	bar
Range	5001100 hPa
	1 hPa
Resolution	0.1 mmHg
	0.001 bar
Accuracy	±4 hPa





Skyview Centre, 9 Churchfield Road, Fax: +44 (0)1787 883139 Chilton Industrial Estate, Sudbury, Suffolk. CO10 2YA. (UK)

Tel: +44 (0)1787 883138 email: systems@skyview.co.uk web: www.skyview-systems.co.uk

# Package List

- Wireless Sensor
- Wind Cups
- Receiver
- Receiver Antenna
- Receiver Holder
- Adhesive Metal Flakes x 3 (for Receiver Holder installation)
- AA Battery x 3 (for Receiver)
- 3.6V 18505 Lithium Battery x1 (placed in Sensor)
- User Manual & Certificate









Wind Cups



Receiver



Receiver Antenna



Receiver Holder



AA Battery x 3 (for Receiver)



3.6V 18505 Lithium Battery x1 (placed in Sensor)



User Manual & Certificate

# Optional Accessories & Spare Parts

- Magnetic Sensor Mounting Bracket
- Spare Wind Cups
- External Antenna
- Spare Sensor Battery (3.6V 18505 Lithium battery)
- Receiver



Wind Cups



3.6V 18505 Lithium Battery x1 (placed in Sensor)



Magnetic Sensor Mounting Bracket