

THE FLAME OF THE FUTURE

WOOD HEATING COLLECTION

There's nothing more comforting than sitting in front of a roaring wood fire and enjoying the warmth it brings to your home.

At Kent, we have designed a wide range of heaters to suit any space, style and budget to ensure your family is kept warm on even the coldest nights.

Sleek, modern design or rustic traditional charm – you'll find a Kent wood heater that's right for you.









Kent heaters are more efficient than ever and better for you and the environment!

Our range of heaters burn up to 3 times cleaner than the national standard for emissions of 1.5g/kg. Plus, the increased efficiency means your heater will burn less fuel to heat your home.

Installation

We strongly recommend the use of a Maxiheat flue system and professional installation. Maxiheat flue systems are designed, tested and are in accordance with Australian Standard AS2918. It is important to check local regulations prior to installation as well as specifications provided in the instruction manual.







Calisto

Striking in design with minimalist lines, the 'Calisto' series will add a touch of modern style to any home.


This stunning range features some of the cleanest burning models on the market, burning up to 2 x cleaner than the national standard for emissions of 1.5g/kg.



Zero Clearance installation.

Transform a dull blank wall into a magnificent fireplace without major structural alterations or existing brick chimney. Simply purchase a Zero Clearance box and flue kit with any Kent Calisto heater and enjoy the benefits of a built in fireplace without the extensive construction.

Air vents need openings of no less than 10,000mm² at the base and top of the zero clearance enclosure.

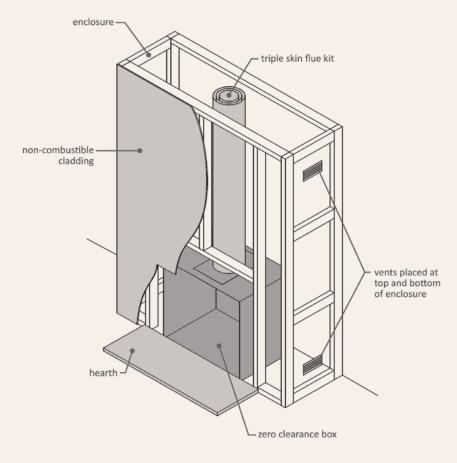

Small Insert

Product Specifications

Coverage: up to 180m²
Peak Heat Output: 9.7kW
Burn Time: up to 6 hours
Maximum Log Size: 320mm
Construction: 6mm
Firebox Size: 0.04m³
Fan: Push button 3 speed

factory fitted

Warranty: 10 Year Firebox Zero Clearance compatible



| BurnWise An initiative of the Australian Home Heating Association | | | | | |
|---|-----------------------------------|---------------------|--|--|--|
| EFFICIENCY | This model Australian Standard | 70% >60% | | | |
| PARTICLE EMISSIONS | This model Australian Standard | 1.0g/kg <1.5g/kg | | | |

Small

Product Specifications

886H x 609W x 508D mm Coverage: up to 200m² Peak Heat Output: 12.1kW Burn Time: up to 7 hours Maximum Log Size: 320mm Construction: 6mm Firebox Size: 0.04m³

factory fitted

Warranty: 10 Year Firebox

Fan: Push button 3 speed



| BurnWise An initiative of the Australian Home Heating Association | | | | | |
|---|--------------------------------|---------------------|--|--|--|
| EFFICIENCY | This model Australian Standard | 69% >60% | | | |
| PARTICLE EMISSIONS | This model Australian Standard | 0.7g/kg <1.5g/kg | | | |

Medium Insert

Product Specifications

Coverage: up to 280m²
Peak Heat Output: 10.8kW
Burn Time: up to 7.5 hours
Maximum Log Size: 370mm
Construction: 6mm
Firebox Size: 0.07m³
Fan: Push button 3 speed

factory fitted

Warranty: 10 Year Firebox Zero Clearance compatible



| BurnWise An initiative of the Australian Home Heating Association | | | | | |
|---|--------------------------------|---------------------|--|--|--|
| EFFICIENCY | This model Australian Standard | 62% >60% | | | |
| PARTICLE EMISSIONS | This model Australian Standard | 0.9g/kg <1.5g/kg | | | |

Medium

Product Specifications

936H x 669W x 558D mm Coverage: up to 300m² Peak Heat Output: 12.3kW Burn Time: up to 8.5 hours Maximum Log Size: 370mm

Construction: 6mm Firebox Size: 0.07m³ Fan: Push button 3 speed

factory fitted

Warranty: 10 Year Firebox



| Burn Wise An initiative of the Australian Home Heating Association | | | | | |
|--|--------------------------------|---------------------|--|--|--|
| EFFICIENCY | This model Australian Standard | 75% >60% | | | |
| PARTICLE EMISSIONS | This model Australian Standard | 0.6g/kg <1.5g/kg | | | |

Large Insert

Product Specifications

Coverage: up to 300m²
Peak Heat Output: 16.6kW
Burn Time: up to 8 hours
Maximum Log Size: 370mm
Construction: 6mm
Firebox Size: 0.1m³
Fan: Push button 3 speed

factory fitted

Warranty: 10 Year Firebox Zero Clearance compatible



| BurnW | An initiative of the Australian Home Heating Association | |
|-----------------------|--|---------------------|
| EFFICIENCY | This model Australian Standard | 63% >60% |
| PARTICLE EMISSIONS | This model Australian Standard | 0.7g/kg <1.5g/kg |

Large

Product Specifications

986H x 769W x 558D mm
Coverage: up to 320m²
Peak Heat Output: 16.6kW
Burn Time: up to 9.5 hours
Maximum Log Size: 370mm
Construction: 6mm
Firebox Size: 0.1m³
Fan: Push button 3 speed

factory fitted

Warranty: 10 Year Firebox



| BurnWise An initiative of the Australian Home Heating Association | | | | | | |
|---|--------------------------------|---------------------|--|--|--|--|
| EFFICIENCY | This model Australian Standard | 64% >60% | | | | |
| PARTICLE EMISSIONS | This model Australian Standard | 0.7g/kg <1.5g/kg | | | | |



Country Classic MKII

Product Specifications

840H x 737W x 567D mm Coverage: up to 300m² Peak Heat Output: 17.3kW Burn Time: up to 8.5 hours Maximum Log Size: 390mm Construction: 6mm Firebox Size: 0.09m3

Fan: 3 speed factory fitted Warranty: 10 Year Firebox BurnW This model 76% **EFFICIENCY** Australian Standard >60%

0.7g/kg

This model

Australian Standard



This minimalistic designed wood heater is perfect for heating medium to large sized spaces. The large glass viewing window will ensure everyone enjoys a view of the crackling fire.


Somerset MKII

PARTICLE

EMISSIONS

Product Specifications

790H x 677W x 517D mm Coverage: up to 200m² Peak Heat Output: 10.9kW Burn Time: up to 8 hours Maximum Log Size: 370mm Construction: 6mm Firebox Size: 0.06m3 Fan: 3 speed factory fitted Warranty: 10 Year Firebox





Perfect for heating small to medium sized spaces. Constructed of solid 6mm steel. this Kent wood heater is strong and efficient.

Jindabyne

Product Specifications

785H x 560W x 525D mm Coverage: up to 180m² Peak Heat Output: 13.3kW Burn Time: up to 7.5 hours Maximum Log Size: 370mm Construction: 6mm Firebox Size: 0.06m3

Warranty: 10 Year Firebox

| BurnWise An initiative of the Australian Home Heating Association | | | | | |
|---|--------------------------------|---------------------|--|--|--|
| EFFICIENCY | This model Australian Standard | 69% >60% | | | |
| PARTICLE EMISSIONS | This model Australian Standard | 1.2g/kg <1.5g/kg | | | |



Perfect for smaller spaces, the Jindabyne is rustic in design. The included trivet accessory is perfect for cooking soups and stews or boiling the kettle.

| FREESTANDING | | Rear | Side | Corners | Hearth | Hearth Min Dimensions | | Rear to Flue |
|-------------------------------|---|--------------------------|-------------------|------------------|--------|-----------------------|-------|-----------------|
| HEATERS | | Wall | Wall | Corners | Front | Width | Depth | Centre |
| All measurements are in mm | | Α | В | С | D | Ε | F | G |
| FAIRLIGHT* | Maxiheat Standard Metallic Black Default Flue Kit (includes double shields) Maxiheat Decromesh Metallic Black Default Flue Kit (inner & outer shields) Maxiheat Non-Perforated Metallic Black Flue Kit (inner & outer shields) | 175 200 200 | 375 350 300 | 25 | 400 | 1190 | 900 | 179 |
| COUNTRY CLASSIC MKII | Maxiheat Standard Metallic Black Default Flue Kit (includes double shields) Maxiheat Decromesh Metallic Black Default Flue Kit Maxiheat Non-Perforated Metallic Black Flue Kit (includes inner shield) | 200 200 250 | 325 | 70 100 100 | 300 | 1049 | 885 | 199 |
| SOMERSET MKII | Maxiheat Standard Metallic Black Default Flue Kit (includes double shields) Maxiheat Decromesh Metallic Black Default Flue Kit (with flue spigot shield - included) Maxiheat Non-Perforated Metallic Black Flue Kit (includes inner shield) | 200 200 250 | 450 325 325 | 100 | 300 | 999 999 1049 | 885 | 199 |
| JINDABYNE | Maxiheat Standard Default Stainless Kit Maxiheat Standard Default Stainless Flue Kit with single shield Maxiheat Decromesh Default Flue Kit Maxiheat Standard Default Stainless Flue Kit with double shields | 475 250 250 150 | 800 | 525 | 300 | 850 | 850 | 175 |
| CALIENTE | Maxiheat Standard Black Default Flue Kit (no shields) Maxiheat Standard Black Default Flue Kit (double shields) | 250 75 | 425 400 | 275 100 | 300 | 800 | 900 | 224 |
| CALISTO SMALL | Maxiheat Decromesh Metallic Black Default Flue Kit Maxiheat Non-Perforated Metallic Black Flue Kit (includes inner shield) | 70 | 135 150 | 10 | 300 | 875 890 | 878 | 182 |
| CALISTO MEDIUM | Maxiheat Decromesh Metallic Black Default Flue Kit Maxiheat Non-Perforated Metallic Black Flue Kit (includes inner shield) | 70 | 240 | 50 | 300 | 935 | 928 | 182 |
| CALISTO LARGE | Maxiheat Decromesh Metallic Black Default Flue Kit (outer shield) Maxiheat Non-Perforated Metallic Black Flue Kit (includes inner shield) | 150 | 400 | 200 | 470 | 1035 | 1178 | 182 |


^{*} Refer to Kent Fairlight instruction manual for additional hearth specifications. We recommend using the Maxiheat Square Tiled Hearth (MXTHSQ12BLK/GRY) or equivalent.

Refer to your local dealer for clearance information


With all freestanding and inbuilt heaters, it is imperative to use a non-combustible hearth to protect your flooring and its surrounding area. We recommend following our minimum hearth clearance diagrams as outlined:

Refer to the product installation manual for final specifications.

STANDARD INSTALLATION



CORNER INSTALLATION



| INSERT HEATERS | Fascia (mm) | | Cabinet (mm) | | | Rear of Fascia | |
|---------------------------------|-------------|-------|--------------|-------|-------|----------------|--|
| All measurements are in mm | Height | Width | Height | Width | Depth | to Centre Flue | |
| FAIRLIGHT INSERT ZERO CLEARANCE | 626 | 1145 | 651 | 1071 | 550 | 292 | |
| CALISTO SMALL INSERT | 696 | 761 | 625 | 580 | 416 | 268 | |
| CALISTO SMALL ZERO CLEARANCE | 696 | 761 | 817 | 838 | 578 | 268 | |
| CALISTO MEDIUM INSERT | 746 | 821 | 675 | 640 | 466 | 318 | |
| CALISTO MEDIUM ZERO CLEARANCE | 746 | 821 | 817 | 838 | 578 | 318 | |
| CALISTO LARGE INSERT | 796 | 921 | 725 | 740 | 466 | 318 | |
| CALISTO LARGE ZERO CLEARANCE | 796 | 921 | 817 | 838 | 578 | 318 | |

^{*}Refer to Instruction manual for installation specifications such as clearances to combustible materials and hearth construction. Peak heat output and burn times may vary depending on fuel type, moisture content and loading. When installed, Kent wood heaters have been tested with Maxiheat flue systems and comply with the MOST RECENT Australian Standards ASNZS2918. Heating output may vary depending on climate conditions and house design.

All insert heaters must be installed in a full masonry cavity as per the MOST RECENT Australian Standards ASNZS2918. In general, no combustible material should be closer than 600mm above the hot air outlet or 300mm from the sides of the outer side of the heater box. Details provided in this brochure regarding the installation of a Zero Clearance system are for information purposes only and should not be relied upon as full installation instructions. Due to on-going product development, details and specifications for the wood heater collection may be subject to change without notice. Please check with your local retailer.

YOUR KENT DEALER







Kent wood heaters proudly support the activities of Landcare Australia through its membership of the AHHA



GLG Australia Pty Ltd Building A2, Campus Business Park 350-374 Parramatta Rd, Homebush NSW 2140 Ph 02 9735 4100 info@kentwoodheaters.com.au www.kentwoodheaters.com.au