













Table of Contents

Pallet Rack	3
Pallet Rack Column Loading	3
Pallet Rack Frames & Beams	4
Pallet Rack Deck Supports	5
Pallet Rack Decks6	5
Pallet Rack Accessories 8	3
Vertical Divider–Beam Mount)
Horizontal Divider–Beam Mount11	1
Pallet Rack Signs	2
Pallet Rack Displays 13	3
Pallet Rack Security 16	5
Suspended Maxi in Pallet Rack2	1
Pallet Rack Roll Goods Display	3
@Front Roller-Shelf System for Heavy-Duty 24	4



Wide Span	27
Wide Span Frame Loading	
Wide Span Frames & Beams	28
Wide Span Deck Supports	29
Wide Span Decks	30
Wide Span Accessories	33
Wide Span Vertical Divider Beams & Arms	36
Wide Span Hooks	38
Roll-Around Unit	39
Wide Span Roll Goods Display	39
Trailer Counter & Jack Displays	40

Suspended Maxi in Wide Span	4
Wide Span Gravity Feed Battery Rack	43
Wide Span Dog Food Display	44
Wide Span Bulk Merchandise	45
Wide Span Security Doors	47
Wide Span Adjustable Tire Display	49
Wide Span Gravity Feed System	
Wide Span Sign Holders	52
Maxi Rack	53
Maxi Rack Beam Loading	53
Maxi Rack Frame & Beams	54
Maxi Rack Deck Support & Decks	55
Maxi Rack Gravity Feed System	56
Maxi Rack Accessories	57
Maxi Span	58
Maxispan Frame Loading	58
Maxispan Upright & Beam	59
Maxispan Deck Support	60
Maxispan Decks	6
Omega	62
Omega Frame Loading	62
Omega Merchandising System	63
Omega Wood & Wire Decks	67
Omega Molding Rack	69
Omega Accessories	7
Anchoring	72





www.madixinc.com


Texas 500 Airport Road, Terrell, TX 75160 | 1010 S. Bolton, Jacksonville, TX 75766 **Alabama** 20984 Alabama Hwy. 9, Goodwater, AL 35072 | 500 Madix Drive, Eclectic, AL 36024

Pallet Rack Column Loading

- Column loading is the maximum vertical load that may be applied on any frame (measured in lbs)
- Each frame bears one-half of the load of each beam pair that it supports
- Regular-duty frames: 17,000 lb load capacity
- Heavy-duty frames: 26,000 lb load capacity

12,000 lb 12,000 lb +16,000 lb +12,000 lb 12,000 lb 24,000 lb 28,000 lb 16,000 lb frame load frame load frame load frame load 8,000 lbs 8.000 lbs x 3 levels 8,000 lbs x 3 levels = 24,000 lbs \div 2 frames = 24,000 lbs \div 2 frames 8,000 lbs = 12,000 lbs each frame = 12,000 lbs each frame 8.000 lbs x 4 levels = 32,000 lbs \div 2 frames =16,000 lbs each frame **OVERLOAD! 26,000 LB MAXIMUM LOAD ON HEAVY DUTY FRAMES**


Vertical Impact Load



Considering the magnitude of forces that are involved, no beam can be designed and guaranteed against failure if a pallet is dropped onto Pallet Rack. Most beam failures occur due to improper placement and removal of pallets. It is the sole responsibility of the owner to make sure that trucks are operated only by authorized drivers who have been properly trained.

Pallet Rack Beam Spacing

- Spacing over 48" (1219 mm) vertically reduces column load capacity due to lack channel support
- When lowest beam is 48" (1219 mm) or higher from floor, always secure frame to floor
- All load capacities are based on even weight distribution

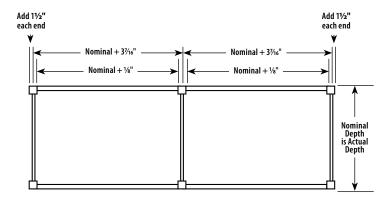

Pallet Rack Frame

- Frames feature welded footplates
- 2" (51 mm) OC beam adjustment
- Size availability to 48" (1219 mm) wide and 192" (4877 mm) high
- Allow minimum pallet overhang of 2" (51 mm) front and 2" (51 mm) rear when selecting frame size
- · Standard finishes: Sahara or Blue Gray

PR2(TYPE)F(ND)(NH)


PR2 Pallet Rack 2" (51 mm) OC

TYPE HD=Heavy-Duty, RD=Regular-Duty

F Frame


ND Nominal Frame Depth 24" to 48" in 6" increments (610 mm to 1219 mm in 152 mm increments)


NH Nominal Frame Height 72", 84", 96", 108", 120", 132", or 144" (1829 mm, 2134 mm, 2438 mm, 2743 mm, 3048 mm, 3353 mm, or 3658 mm)




NOTE!

To preclude overturning, the frame depth x 6 cannot exceed height of topmost loaded beam pair, unless all the frames are properly anchored or braced externally.

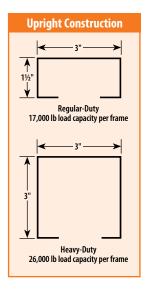



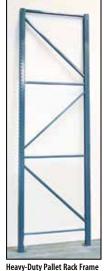

Pallet Rack Beam

- · Available in three heights for differing load capacities
- Step depth accomodates 2" (51 mm) dimensional lumber decking, or wire decking
- · Beams are slotted in step to accept deck supports under decking
- Standard finishes: Sahara or Blue Gray

PR2B(NH)	(NL))-2
-------	-----	------	-----

PR2 Pallet Rack 2" (51 mm) OC

B.... Beam

NH Nominal Beam Height 35=31/2" (89 mm) 50=5" (127 mm)


60=6" (152 mm)

NL Nominal Beam Length (See Chart)



Beam Length X Beam Height	Maximum Capacity per Pair
36" x 3½"	4,950 lbs
36" x 5"	7,600 lbs
36" x 6"	10,000 lbs
48" x 3½"	4,950 lbs
48" x 5"	7,600 lbs
48" x 6"	10,000 lbs
60" x 3½"	4,950 lbs
60" x 5"	7,600 lbs
60" x 6"	10,000 lbs
72" x 3½"	4,950 lbs
72" x 5"	7,600 lbs

Beam Length x Beam Height	Maximum Capacity per Pair
72" x 6"	10,000 lbs
84" x 3½"	4,950 lbs
84" x 5"	7,600 lbs
84" x 6"	10,000 lbs
96" x 3½"	4,950 lbs
96" x 5"	7,600 lbs
96" x 6"	10,000 lbs
108" x 6"	9,110 lbs
120" x 6"	8,000 lbs
132" x 6"	7,270 lbs
144" x 6"	6,660 lbs

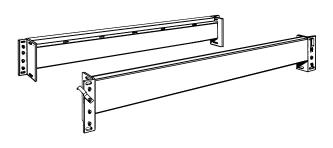

Pallet & Omega Rack Deck Support


- For 5/8" (16 mm) deck
- Formed, heavy-gauge steel with tabs fit into beam slots, providing support for regularduty decking-or to tie beams together to prevent them from rotating when using heavy-duty decking
- Order by frame depth, in quantities shown in table on right
- Standard finishes: Sahara or Blue Gray

DSRPO-(ND)-1

DSRPO Pallet Rack Deck Supports

ND Nominal Depth 24" to 48" in 6" increments (610 mm to 1219 mm in 152 mm increments)

Deck Supports per Beam Length			
Deck Type	Deck Type Nominal Beam Length		
	36" to 72"	2	
Particle Board	84" to 108"	4	
Particle board	120"	4	
	132" to 144"	5	
	36" to 48"	2	
Wire Grid	60" to 96"	4	
	108" to 144"	6	
	36" to 48"	2	
Flow Through	60" to 96"	4	
	108" to 144"	6	



Pallet Rack Flush Deck Support


- · Load-bearing pallet support
- Use one pair per pallet
- Fits flush with top of beam
- · Load capacity 5,000 lbs/pair
- Standard finishes: Sahara or Blue Gray

MPRDSF(ND)-2

MPRDSF ... Pallet Rack Flush Deck Support

ND Nominal Frame Depth 24" to 48" in 6" increments (610 mm to 1219 mm in 152 mm increments)

2 2=15/8" (41 mm)



Pallet Rack Bottom Beam

- Mounts as close to the floor as possible
- · Helps keep debris from under bottom deck
- Standard finishes: Sahara or Blue Gray

PR2B(NH)(NW)-2-B


PR2 Pallet Rack 2" (51 mm) OC

B.... Beams

NH Nominal Beam Height 35=3½" (89 mm) 50=5" (127 mm)

NW Nominal Width 36" to 144" in 12" increments (914 mm to 3658 mm in 305 mm increments)

- 2 2=15/8" (41 mm)
- B.... Bottom



Pallet Rack Deck Support


- For 2" (51 mm) deck
- Formed, heavy-gauge steel with tabs fit into beam slots, providing support for regularduty decking-or to tie beams together to prevent them from rotating when using heavy-duty decking
- Order by frame depth, in quantities shown in table on right
- Standard finishes: Sahara or Blue Gray

MPRDS-(ND)

MPRDS Pallet Rack Deck Supports

ND Nominal Depth 24" to 48" in 6" increments (610 mm to 1219 mm in 152 mm increments)

Deck Supports per Beam Length		
Deck Type	Nominal Beam Length	Required Supports
Heavy-Duty	36" to 144"	2



Pallet Rack Regular-Duty Deck

- Economical, 5%" (16 mm), high-density particle board for lighter loads
- Not recommended where heavy pallets scrape the surface
- Use with Pallet Rack Deck Support [DSRPO-(ND)-1] only
- Not recommended for heavy, unevenly distributed loads

MPRRDD(ND)(NL)-U

MPR Pallet Rack


RD Regular-Duty

D.... Deck

ND Nominal Frame Depth 24" to 48" in 6" increments (610 mm to 1219 mm in 152 mm increments)

NL Nominal Beam Length 36" to 96" in 12" increments (914 mm to 2438 mm in 305 mm increments)

U Unsealed



Deck Supports per Beam Length		
Nominal Beam Length	Required Supports	
36" to 72"	2	
84" to 108"	4	
120"	4	
132" to 144"	5	

NOTE!Deck Supports are *NOT* included!



Pallet Rack Heavy-Duty Decking

- Unfinished, 2" (51 mm) dimensional lumber provides high loading capacity
- Use with Pallet Rack Deck Support [MPRDS-(ND)] only

NOTE!Deck Supports are *NOT* included!

MPRHDD-(ND)


MPR Pallet Rack

HD.... Heavy-Duty

D.... Deck

ND Nominal Frame Depth 24" to 48" in 6" increments (610 mm to 1219 mm in 152 mm increments)

Deck Supports pe	r Beam Length
Nominal Beam Length	Required Supports
36" to 144"	2



Order one piece per linear foot of beam

Pallet Rack Wire Grid Deck

- Sturdy wire, 5/16" (8 mm) gauge in diameter, is welded on 3" (76 mm) grid centers
- Use with Pallet Rack Deck Support [DSRPO-(ND)-1] only
- Standard finishes for Wire Grid Deck: Silver Vein, Sahara, and Blue Gray

Wire grid piece length runs parallel to beam length

Deck Type	Nominal Beam Length	Combine these Piece Lengths to equal Beam Length	Required Quantity of Deck Supports
0 0:	36"	36"	2
One-Piece Decks	48"	48"	2
Detro	60"	60"	2
	72"	36"+ 36"	4
Two-Piece Decks	84"	42"+ 42"	4
Dethi	96"	48"+ 48"	4
	108"	36"+ 36" + 36"	6
Three-Piece Decks	120"	36"+ 48" + 36"	6
	132"	48"+ 36" + 48"	6
	144"	48"+ 48" + 48"	6


PRWMS(ND)(NL)-3

PR Pallet Rack

WMS Wire Grid Deck

- ND Nominal Frame Depth 24" to 60" in 6" increments (610 mm to 1524 mm in 152 mm increments)
- NL Nominal Piece Length 24" to 48" in 6" increments (610 mm to 1219 mm in 152 mm increments)
- 3 Grid Size 3" OC (76 mm)

NOTE! Deck Supports are NOT included!

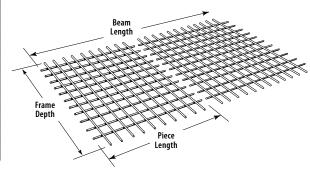



Frame Depth	Actual Frame Depth
x Piece Length	x Actual Piece Length
24"x 24"	20¾" x 23¾"
24"x 36"	20¾" x 35¾"
24"x 48"	20¾" x 47¾"
30"x 24"	26¾" x 23¾"
30"x 36"	26¾" x 35¾"
30"x 48"	26¾" x 47¾"
36"x 24"	32¾" x 23¾"
36"x 36"	32¾" x 35¾"
36"x 48"	32¾" x 47¾"
42"x 24"	38¾" x 23¾"
42"x 36"	38¾" x 35¾"
42"x 48"	38¾" x 47¾"
48"x 24"	44¾" x 23¾"
48"x 36"	44¾" x 35¾"
48"x 48"	44¾" x 47¾"

Flow Through Pallet Rack Deck

- Sturdy wire, 5/16" (8 mm) gauge in diamete welded on 3" (76 mm) grid centers with an expanded, metal mesh surface
- Use with Pallet Rack Deck Support [DSRPO-(ND)-1] only
- Provides 35% open space
- Standard finishes for Wire Grid Decks: Silver Vein, Sahara, and Blue Gray

FTPR2D-(ND)(NL)

FT Flow Through

PR2D Pallet Rack Deck


ND Nominal Frame Depth 24" to 48" in 6" increments (610 mm to 1219 mm in 152 mm increments)


NL Nominal Piece Length 24" to 48" in 6" increments (610 mm to 1219 mm in 152 mm increments)



NOTE!Deck Supports are *NOT* included!

Deck Type	Nominal Beam Length	Combine these Piece Lengths to equal Beam Length	Required Quantity of Deck Supports
One-Piece	36"	36"	2
Decks	48"	48"	2
	60"	30"+ 30"	4
Two-Piece	72"	36"+ 36"	4
Decks	84"	42"+42"	4
	96"	48"+ 48"	4
	108"	36"+36" + 36"	6
Three-Piece	120"	36"+ 48" + 36"	6
Decks	132"	48"+ 36" + 48"	6
	144"	48"+ 48" + 48"	6



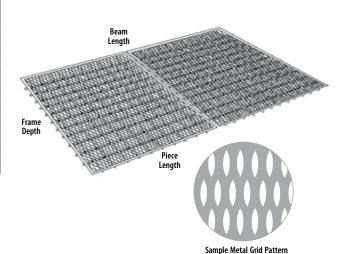


Frame Depth X Piece Length	Actual Frame Depth X Actual Piece Length
24"x 24"	20¾" x 23¾"
24"x 36"	20¾" x 35¾"
24"x 48"	20¾" x 47¾"
30"x 24"	26¾" x 23¾"
30"x 36"	26¾" x 35¾"
30"x 48"	26¾" x 47¾"
36"x 24"	32¾" x 23¾"
36"x 36"	32¾" x 35¾"
36"x 48"	32¾" x 47¾"
42"x 24"	38¾" x 23¾"
42"x 36"	38¾" x 35¾"
42"x 48"	38¾" x 47¾"
48"x 24"	44¾" x 23¾"
48"x 36"	44¾" x 35¾"
48"x 48"	44¾" x 47¾"


Pallet Rack Waterfall Wire Grid Deck

- Sturdy wire, 5%" (8 mm) gauge in diameter, is welded on 3" (76 mm) grid centers to f orm decking
- Integrated supports eliminate standard deck supports
- Standard finishes for Waterfall Wire Grid Decks: Silver Vein, Sahara, and Blue Gray

PRWFWGD(ND)(NL)-3

- PR Pallet Rack
- WF Waterfall
- WGD Wire Grid Deck
 - ND Nominal Frame Depth 24" to 48" in 6" increments (610 mm to 1219 mm in 152 mm increments)
 - NL Nominal Piece Length 24" to 48" in 6" increments (610 mm to 1219 mm in 152 mm increments)
 - 3 Grid Size 3" (76 mm) OC

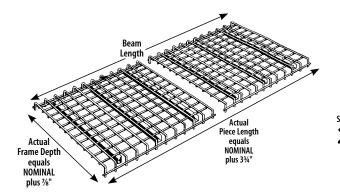





Nominal Beam Length	Combine these Piece Lengths to equal Beam Length
36"	36"
48"	48"
60"	30"+30"
72"	36"+36"
84"	42"+ 42"
96"	48"+ 48"
108"	36"+36" + 36"
120"	36"+ 48" + 36"
132"	48"+ 36" + 48"
144"	48"+ 48" + 48"

Pallet Rack Back-to-Back Connector


- Heavy-gauge connector keeps back-to-back runs properly spaced
- Use two connectors on frames up to 96"
 (2438 mm) high; three on taller units
- · Hardware included
- Standard finishes: Sahara or Blue Gray

PRBBC(ND)

PR Pallet Rack

BBC Back-to-Back Connector

ND Nominal Back Spacing 2" to 12" in 1" increments (51 mm to 305 mm in 25 mm increments)




Pallet Rack Pallet Stop

- Heavy-gauge angle aids in pallet positioning
- Easily attaches to decking or beam with supplied hardware
- · Standard finishes: Sahara or Blue Gray

PRPS-(NL)

PRPS Pallet Rack Pallet Stop

NL Nominal Length 36" to 96" in 12" increments (914 mm to 2438 mm in 305 mm increments)



Pallet Rack 2" Stop Beam

- Stops pallets from overhanging the rear beam
- Positions pallet to sit in proper location
- · Standard finishes: Sahara or Blue Gray

PR2PSB(NW)

PR2PSB.... Pallet Rack 2" Pallet Stop Beam

NW Nominal Width 36" to 96" in 12" increments (914 mm to 2438 mm in 305 mm increments)



Pallet Rack Stop 2" OC with 3" Offset


- Allows oversized pallets to overhang beams by 3" (76 mm)
- · Standard finishes: Sahara or Blue Gray

PR2PS3-(NW)

PR2PS Pallet Rack 2" Pallet Stop Beam

3 3" Offset

NW Nominal Length 36" to 96" in 12" increments (914 mm to 2438 mm in 305 mm increments)




Pallet Rack Frame Guard

- For Pallet Rack Frames only
- · Vertical member is heavy-gauge tubing
- 24"H x 5"W x 2"D (610 mm x 127 mm x 51 mm), welded to 16" (406 mm) foot plates
- Hardware pack includes ICBO-approved expansion bolts to secure guard to floor
- Two guards are required at each end of single or back-to-back runs
- Standard finishes: Sahara or Blue Gray

PRUG

PRUG Pallet Rack Frame Guard




Pallet Rack Frame Protector

- 18" (457 mm) high, heavy-gauge channel accommodates standard foot plate, to protect the frame posts
- Hardware pack includes bolts to secure protector to frame and two ICBO-approved expansion bolts for anchoring
- · Standard finishes: Sahara or Blue Gray

FP18

FP18 Pallet Rack Frame Protector




Pallet Rack Leveling Shim

- Available in 10-packs, consisting of five 12-gauge and five 16-gauge shims for leveling Pallet Rack systems
- Galvanized finish

PRSHM

PRSHM Pallet Rack Leveling Shim



Pallet Rack Floor Anchor Kit

- ICBO approved expansion bolts for use as floor anchors for Pallet Rack systems
- Dimensions: 1/2" 13 x 41/2"
- Always check local requirements and site conditions to determine correct fastener for application

PRFAK-(OPT)

PRFAK Pallet Rack Floor Anchor Kit OPT Blank=4 pack of anchor 1=1 anchor



Pallet Rack Wall Mount Bracket

- Heavy gauge bracket assures consistent spacing from frame to wall
- Hardware pack includes bolts to secure bracket to frame
- Not recommended for use when seismic certification-required
- Standard finishes: Sahara or Blue Gray

PRWMB-(ND)

PR.... Pallet Rack

WMB Wall Mount Bracket

ND Nominal Frame Depth 6" to 12" in 2" increments (152 mm to 305 mm in 51 mm increments)



Vertical Dividers-Beam Mount

M Vertical Divider for Pallet Rack Box Beam

- Mounts to Pallet Rack Beams with supplied hardware
- Available in regular or heavy-duty:
 - Regular-duty: heavy-gauge wire construction
 - Heavy-duty: 1" (25 mm) tubing construction
- Both 18" (457 mm) and 20" (508 mm) heights are U-shaped; all others M-shaped
- Standard finishes: Sahara or Blue Gray

MVDA-(ND)(NH)(TYPE)-PR


MVDA M-Vertical Divider Arm for Pallet Rack


ND.... Nominal Depth 20", 22", 24", 26", 30", 32", 36", 38", 40", 42", 44", 50" or 56" (508 mm, 559 mm, 610 mm, 660 mm, 762 mm, 813 mm, 914 mm, 1016 mm, 1067 mm, 1118 mm, 1270 mm or 1422 mm)

NH 24", 30", 36", 42", 48", 54" or 60" (610 mm, 762 mm, 914 mm, 1067 mm, 1372 mm or 1524 mm)

TYPE H=Heavy-Duty, R=Regular-Duty

PR Pallet Rack





M Vertical Divider for Pallet Rack Molding Rack Beam

- Mounts to Pallet Rack Molding Rack Beams [WSMRB-(NL)(STANDOFF)]
- Heavy-gauge wire construction
- Upper depth is same as lower depth

MVDA-(ND)(NH)R-M

MVDA M-Vertical Divider Arm for Pallet Rack

ND Nominal Depth 20" or 22" (508 mm, 559 mm)

NH 24", 30" or 36" (610 mm, 762 mm or 914 mm)

R.... Regular-Duty

M.... Modified



M Vertical Divider with Three Supports for Pallet Rack

- Mounts to three Pallet Rack Beams with supplied hardware
- 72" (1829 mm) nominal height and 30" (762 mm) nominal depth
- Heavy-gauge wire construction
- Standard finishes: Sahara or Blue Gray

MVDA3-3072-PR

MVDA M-Vertical Divider Arm for Pallet Rack

3....3 Supports

30 Nominal Depth 30" (762 mm)

72 Nominal Height 72" (1829 mm)

PR Pallet Rack



Wire Grid Divider

- Wire grid panel mounts to two Pallet Rack Beams with supplied hardware
- Heavy-gauge wire construction
- Standard finishes: Sahara or Blue Gray


WGVDA-(ND)(NH)-CPR

WGVDA Wire Grid Vertical Divider Arm

ND Nominal Depth 36" (914 mm)

NH Nominal Height 32" (813 mm)

CPR Clip for Pallet Rack





Vertical Divider Bar

- 1" (25 mm) OC punched cross tube with brackets to fit Pallet Rack Beam
- · Mounting hardware included
- Use with regular or heavy-duty Vertical Divider Arms [VDA-(NL)(TYPE)] to create vertical divisions
- Standard finishes: Sahara or Blue Gray


VDBPRB-(NW)(ND)

VDBPRB.... Vertical Divider Bar Pallet Rack

NW Nominal Width

3' (914 mm) and 4' (1219 mm)

ND Nominal Depth 02" (51 mm)



Horizontal Dividers-Beam Mount-

Vertical Divider Arm


- Mounts to Vertical Divider Bar, either straight-in or at 45°
- Arms may be mounted to front and rear of standoff bars
- Regular-duty divider arms are ³/₈" (10 mm) diameter with red neoprene safety tip
- Heavy-duty arms are 1" (25 mm) square tubing with vinyl safety cap
- Standard finishes: Sahara or Blue Gray

VDA-(NL)(TYPE)

VDA Vertical Divider Arms

NL Nominal Frame Length
R=4"-24" in 2" increments
(102 mm-610 mm in 51 mm increments)
H=10"-30" in 2" increments
(254 mm-762 mm in 51 mm increments)

TYPE R=Regular-Duty, H=Heavy-Duty



Horizontal Divider Arm, Step Beam

- Mounts to Pallet Rack Beam pairs with supplied hardware
- Tubing construction
- Height for all sizes is 48" (1219 mm)
- Standard finishes: Sahara or Blue Gray

HDA-SB-(ND)

HDA Horizontal Divider Arm

SB Step Beam

ND Nominal Depth 30", 36", 48" or 60" (762 mm, 914 mm, 1219 mm or 1524 mm)



M Vertical Divider Single Arm


- Mounts to Pallet Rack Beam with supplied hardware
- Tubing construction with plastic cap
- Standard finishes: Sahara or Blue Gray

MVDSA-(ND)

MVD M-Vertical Divider

SA Single Arm

ND.... Nominal Depth 18", 24", 26", 32", 36" or 44" (457 mm, 610 mm, 660 mm, 813 mm, 914 mm or 1118 mm)



Cut Plywood Divider


- Two-piece rack has 30½" (775 mm) interlocking vertical tubes for height adjustment
- Minimum height is 31" (787 mm); maximum height is 58" (1473 mm)
- Attaches to wood decking with screws
- · Standard finishes: Sahara or Blue Gray

OCPD-(ND)

OCPD Omega Cut Plywood Divider

ND 36", 42", 48" or 60"]

(914 mm, 1067 mm, 1219 mm or 1524 mm)

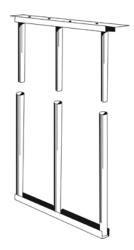





Pallet Rack Beam Cover with Sign Holder

- Hooks over top of Pallet Rack Beam
- Signage dimension 51/4" (133 mm) H, maximum thickness of 3/8" (10 mm)
- Visible height of signage 45%" (118 mm)
- Recommended signage length: 1/32" (0.3 mm) less than width of beam cover
- · Standard finishes: Sahara or Blue Gray

PR2BCS-(NH)(NW)


5/16" PR2BCS Pallet Rack Beam Cover with Sign Holder NH Nominal Height 35=31/2", 50=5" or 60=6" Actual Signage Height 3½", 5" or 6" (89 mm, 127 mm (89 mm, 127 mm or 152 mm) NW Nominal Width 36", 48", 60", 72", 84" or 96" (914 mm, 1219 mm, 1524 mm, 1829 mm, or 152 mm) 2134 mm or 2438 mm)

Rug Display for Box Beam

- Brackets supported by box beams
- Rear bracket has welded tube, front has cutout for supplied tubing
- Tubing is 60" (1524 mm) long and may be field cut for smaller depth applications
- Mounting screws included
- Rug Display Clips sold separately
- Standard finishes: Sahara or Blue Gray

RDBB

RDBB Rug Displayer for Box Beam




Rug Display Clip

- Clip hangs on RDBB tube
- 40 clips in each pack
- Standard finishes: Sahara or Blue Gray

RDC-40

RDC Rug Display Clip 40 40 Pack



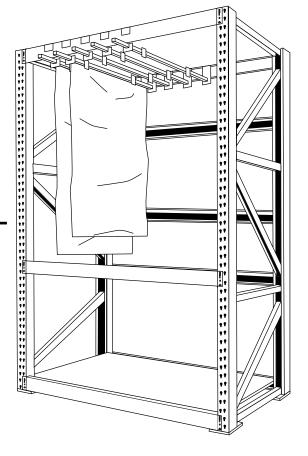



Pallet Rack Loop Merchandiser

- Cross merchandise products on Pallet Rack Uprights
- Choice of open loop for vertically displayed items or closed loop with expanded metal bottom
- Hardware pack included for easy installation
- · Standard finishes: Sahara or Blue Gray

PR2LM-(D)-(TYPE)

PR2LM Pallet Rack Loop Merchandiser

D Diameter 06", 10" or 12" (152 mm, 254 mm or 305 mm)

TYPE O=Open, C=Closed







Cross Merchandise Basket

- · Wire mesh basket
- 15"W x 10"D x 12"H (381 mm x 254 mm x 305 mm)
- Bolts to Pallet Rack Upright
- · Standard finishes: Sahara or Blue Gray

CMB

CMB Cross Merchandise Basket





Wide Span Garden Tool Display Bar

- Heavy-duty upright channel welded to Pallet Rack brackets
- May be used on both Wide Span and Pallet Rack uprights
- Allows use of beam-mounted accessories with locking clips – no hardware required
- 2" (51 mm) OC slotting
- · Standard finishes: Sahara or Blue Gray

WSGTDB-(NL)

WSGTDB....Wide Span Garden Tool Display Bar NL....Nominal Length 48" or 96" (1219 mm or 2438 mm)



Wide Span Single Hook Display

- Single arm for crossbar
- Works on Garden Tool Display Bar
- Fits 2" (51 mm) OC slotting
- Standard finishes: Sahara or Blue Gray

WSSHD-(ND)

- WS Wide Span
- SHD Single Hook Display
- ND Nominal Depth 18", 24", 30" or 36" (457 mm, 610 mm, 762 mm or 914 mm)



Wide Span Garden Tool Display Double Hook

- Double, square, tube arm
- Works on Garden Tool Display Bar
- Fits 2" (51 mm) OC slotting
- Standard finishes: Sahara or Blue Gray

WSGTDH-(ND)

WS Wide Span

GTDH Garden Tool Double Hook

ND Nominal Depth 18", 24", 30" or 36" (457 mm, 610 mm, 762 mm or 914 mm)







Wide Span Molding Rack Beam

- Box beam with welded 1" (25 mm) OC punched cross tube
- Use with regular or heavy-duty Vertical Divider Arms to create compartments
- Arms may be oriented face in or face out
- Standard finishes: Sahara or Blue Gray

WSMRB-(NL)(STANDOFF)

WSMRB....Wide Span Molding Rack Beam

NL....Nominal Length 48", 60", 72", 84" or 96" (1219 mm, 1524 mm, 1829 mm, 2134 mm or 2438 mm)

STANDOFF....02", 08", or 14" (51 mm, 203 mm or 356 mm)

Wide Span Retainer Pin

- Required to lock Molding Rack Beams in place
- Standard finishes: Sahara or Blue Gray

WSREP-20

WSREP Wide Span Retainer Pin 20 20 Pack




Pallet Rack Gravity Feed Channel

- Formed metal channel with variable width for products
- 2" (51 mm) high
- Order depth to match frame depth
- Order DROP based on positioning of beams— 4", 6", 8" or 10" (102 mm, 152 mm, 203 mm or 254 mm) difference from rear to front beam placement height
- · Standard finishes: Sahara or Blue Gray

PR(ND)GFC(DROP)-(NW)02

- PR Pallet Rack
- ND Nominal Depth 18", 24", 30", 36", 42", 48" or 60" (457 mm, 610 mm, 762 mm, 944 mm, 1067 mm or 1219 mm)
- GFC Gravity Feed Channel
- DROP Drop 04=4", 06=6", 08=8 or 10" (102 mm, 152 mm, 203 mm or 254 mm)
 - NW Nominal Width 46=4.562", 55=5.5", 65=6.5" or 76=7.625" (116 mm, 140 mm, 165 mm or 194 mm)
 - 02 Channel Height





Pallet Rack Ladder Display Assembly

- Mounts to Pallet Rack Beam with supplied hardware
- 33" D (838 mm) heavy-duty arm with gusset
- 21/2" x 21/2" (64 mm x 64 mm) tag plate
- · Standard finishes: Sahara or Blue Gray

PRLDA33

Texas: 214-515-5400 Alabama: 256-839-6354

www.madixinc.com

PRLDA Pallet Rack Ladder Display Assembly 33 Nominal Length 33" (838 mm)






Pallet Rack Pipe Bracket, Side Mount

- H-side mount bracket mounts to Pallet Rack Frame [PR2(TYPE)F(ND)(NH)]
- Sold in pairs
- Standard finishes: Sahara or Blue Gray

PRPB-(ND)

PRPB Pallet Rack Pipe Bracket

ND Nominal Depth 8", 12", 16", 20" or 24" (203 mm, 305 mm, 406 mm, 508 mm or 607 mm)



Pallet Rack Pipe Bracket, Front Mount

- H-front-mount bracket mounts to Pallet Rack Frame [PR2(TYPE)F(ND)(NH)]
- Sold in pairs
- Standard finishes: Sahara or Blue Gray


PRPB-(ND)FM

PRPB Pallet Rack Pipe Bracket

ND Nominal Depth 8", 12", 16", 20" or 24" (203 mm, 305 mm, 406 mm, 508 mm or 607 mm)

FM ... Front Mount





Weed Eater Holder

- Height-adjustable bracket mounts to Rack Frame [PR2(TYPE)F(ND)(NH)]
- Wire holder with black vinyl caps
- Standard finishes: Sahara or Blue Gray

WEHPR

WEHPR Weed Eater Holder for Pallet Rack



Pallet Rack TV Bracket

- Mounts to end of Pallet Rack using four 3/8-3/16 x 1" bolts
- Nominal widths 36", 42" or 48" (914 mm, 1067 mm or 1219 mm)
- Mounting slots are located toward top to allow gusset-style mounting and securing of aftermarket TV-mounting brackets


LCDTVCBPREM(NW)

LCDTVCB.....LCD TV Crossbar PR.....Pallet Rack

EM....End Mount

NW.....Nominal Width 36", 42" or 48" (944 mm, 1067 mm or 1219 mm)



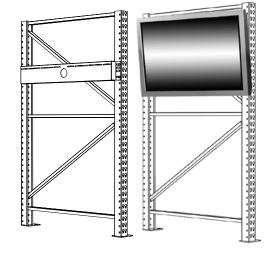


Pallet Rack Security Doors

- Optional panel type:
 - ° 2" x 2" wire grid (76 mm x 76 mm)
 - ° 1" x 6" wire grid (25 mm x 152 mm)
 - ° Hardboard
- · Locking device is customer supplied
- Standard finishes: Sahara or Blue Gray

	Pallet Rack Security Doors				
	Description	Part Number	Qty.		
Α	Pallet Rack Side Security Panels	PRSSP-(NW)(ND)	2		
В	Pallet Rack Security Doors	PRSD2X2-(NW)(NH)(OPTION)	2		
C	Pallet Rack Frame	PR2(TYPE)F(ND)(NH)	3		
D	Pallet Rack Upper Security Deck	PRUSD-(NW)(ND)	2		
*	Pallet Rack Security Door Hinged Hardware Kit	PRSDHHK	2		
*	Pallet Rack Security Deck Hardware Kit	PRSDHK-1	2		

*Not visible

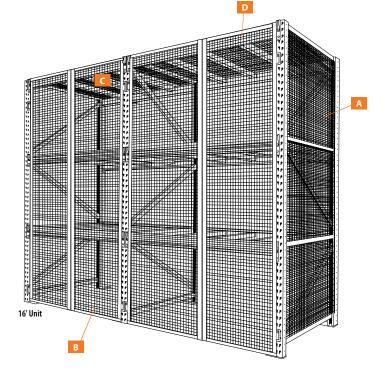

A Pallet Rack Side Security Panel

- Side Security Panels prohibit side access to merchandise
- 2" x 2" (51 mm x 51 mm) panels with welded brackets fasten to the cross bracing on Pallet Rack Frame with self threading screws
- Order PRSDHK-1 kit for all necessary hardware
- Standard finishes: Sahara or Blue Gray


PRSSP-(NH)(ND)

PRSSP Pallet Rack Side Security Panel

NH Nominal Height 48", 84", 96" or 120" (1219 mm, 2134 mm, 2438 mm or 3048 mm)

ND Nominal Depth 30", 36" or 48" (762 mm, 914 mm or 1219 mm)

Nominal Height	Number of Panels
48"	1
84"	2
96"	2
120"	3





B Pallet Rack Security Doors

- Secure merchandise by adding Pallet Rack Security Doors to either new or existing Pallet Rack systems
- Built of 2" x 2" (51 mm x 51 mm) wire grid
- Locking device supplied by customer
- Order the Pallet Rack Security Door Hardware Kit, PRSDHHK, and Pallet Rack Security Deck Hardware Kit, PRSDHK-1, to attach doors to Pallet Rack Frames (ordered separately)
- Standard finishes: Sahara or Blue Gray

PRSD2X2-(NW)(NH)(OPT)

PRSD Pallet Rack Security Doors-

2X2 2"x 2" (51 mm x 51 mm) Grid

NW Nominal Width 48" or 96" (1219 mm or 2438 mm)

NH Nominal Height 48", 72", 84", 96", 108" or 120" (1219 mm, 1829 mm, 2134 mm, 2438 mm, 2743 mm or 3048 mm)

OPT.... Security Panel Option: Blank=With Security Panels NSP=No Security Panels



Shown with Hinge Kit (PRSDHHK) and Security Panels

Pallet Rack Frames

- Frames feature welded footplates
- 2" (51 mm) OC beam adjustment
- Size availability to 48" (1219 mm) wide and 144" (3658 mm) high
- Allow minimum pallet overhang of 2" (51 mm) front and 2" (51 mm) rear when selecting frame size
- · Standard finishes: Sahara or Blue Gray

PR2(TYPE)F(ND)(NH)

PR2 Pallet Rack 2" (51 mm) OC

TYPE HD=Heavy-Duty, RD=Regular-Duty

F Frame

ND Nominal Frame Depth 24" to 48" in 6" increments (610 mm to 1219 mm in 152 mm increments)

NH Nominal Frame Height 72", 84", 96", 108", 120", 132" or 144" (1829 mm, 2134 mm, 2438 mm, 2743 mm, 3048 mm, 353 mm or 3658 mm)



NOTE!

To preclude overturning, the frame depth x 6 cannot exceed height of topmost loaded beam pair, unless all the frames are properly anchored or braced externally.

Pallet Rack Security Deck


- Eliminate access to merchandise stored on Pallet Rack systems
- Security Deck is fastened to beams using hardware in the Pallet Rack Security Door Hinged Hardware Kit (PRSDHHK) and Pallet Rack Security Deck Hardware Kit(PRSDHK-1, ordered separately)
- · Standard finishes: Sahara or Blue Gray

PRUSD-(NW)(ND)

PRUSD Pallet Rack Upper Security Deck

NW Nominal Width 72" or 96" (1829 mm or 2438 mm)

ND.... Nominal Depth 24" to 48" in 6" increments (610 mm to 1219 mm in 152 mm increments)



Pallet Rack Security Door Hinge Hardware Kit


- Includes all necessary screws and hardware components required to fasten set of Pallet Rack Security Doors, Upper Deck, and Side Security Panels to Pallet Rack system
- Standard finishes: Sahara or Blue Gray

PRSDHHK

PRSD Pallet Rack Security Door

HHK.... Hinge Hardware Kit

Contents	Quantity
Right-Hand Hinges	2
Left-Hand Hinges	2
Deck Securing Brackets	6
Connecting Plates	6



Pallet Rack Security Door Hardware Kit

 Includes assortment of nuts, bolts and washers

PRSDHK-1

PRSD Pallet Rack Security Door

HK-1 Hardware Kit



Pallet Rack Wire Grid Product Retainer


- Tube-framed wire grid panels with attached pallet rack brackets provide protection from falling merchandise
- May be used as a rear security panel
- Standard finishes: Sahara or Blue Gray

PRWGPR-(NW)(NH)

PRWGPR... Pallet Rack Wire Grid Product Retainer

NW Nominal Width 48", 96", 108" or 120" (1219 mm, 2438 mm, 2743 mm or 3048 mm)

NH Nominal Height 42", 48", 54", 58", 60" or 66" (1067 mm, 1219 mm, 1372 mm, 1473 mm, 1524 mm or 1676 mm)

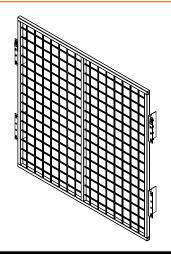

Pallet Rack Wire Grid Product Retainer 2" x 2"

- Tube-framed wire grid panels with attached pallet rack brackets provide protection from falling merchandise
- May be used as a rear security panel
- Standard finishes: Sahara or Blue Gray


PRWGPR2X2-(NW)(NH)

PRWGPR... Pallet Rack Wire Grid Product Retainer

2X2 2" x 2" (51 mm X 51 mm)

NW Nominal Width 48", 96" or 108" (1219 mm, 2438 mm or 2743 mm)

NH Nominal Height 18", 36", 48", 54", 58", 60", 66", 72" or 78" (457 mm, 914 mm, 1219 mm, 1372 mm, 1473 mm, 1524 mm, 1676 mm, 1829 mm or 1981 mm)



Pallet Rack Wire Grid Product Retainer 2" OC with Extended Bracket

- Tube-framed wire grid panels with attached pallet rack brackets provide protection from falling merchandise
- May be used as a rear security panel
- Standard finishes: Sahara or Blue Gray


PRWGPR2EB-(NW)(NH)

PRWGPR2Pallet Rack Wire Grid Product Retainer 2" OC

EB.....Extended Bracket

NW.....Nominal Width 108" (743 mm)

NH.....Nominal Height 54" or 60" (1372 mm or 1524 mm)

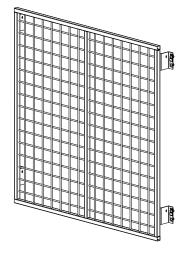




Pallet Rack Offset Security Doors

- 2" x 2" wire grid (76 mm x 76 mm)
- · Locking device is customer supplied
- Standard finishes: Sahara or Blue Gray

	Pallet Rack Offset Security Doors (as shown)				
	Description	Part Number	Qty.		
Α	Pallet Rack Side Security Panels	PRSSP-(NH)(ND)	2		
В	Pallet Rack Upright Security Panels	PRUSP-(NH)	2		
C	Pallet Rack Security Doors	PRSD2X2-(NW)(NH)(OPTION)	2		
D	Pallet Rack Security Door Hinged Hardware Kit	PRSDHHK	1		
Ε	Pallet Rack Security Door Hardware Kit	PRSDHK-1	1		
F	Pallet Rack Frame	PR2(TYPE)F(ND)(NH)	2		
G	Pallet Rack Upper Security Deck	PRUSD-(NW)(ND)	2		

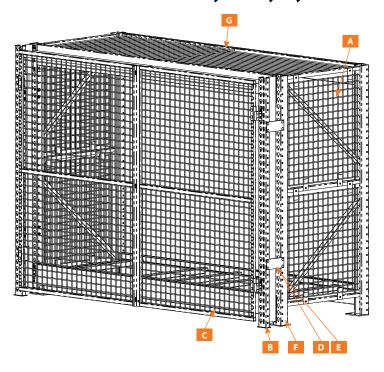

A Pallet Rack Side Security Panel

- Side Security Panels prohibit side access to merchandise
- 2" x 2" (51 mm x 51 mm) panels with welded brackets fasten to the cross bracing on Pallet Rack Frame with self-threading screws
- Order PRSDHK-1 kit for all necessary hardware
- Standard finishes: Sahara or Blue Gray


PRSSP-(NH)(ND)

PRSSP Pallet Rack Side Security Panel

NH Nominal Height 48", 84", 96" or 120" (1219 mm, 2134 mm, 2438 mm or 3048 mm)

ND Nominal Depth 30", 36" or 48" (762 mm, 914 mm or 1219 mm)

Nominal Height	Number of Panels
48"	1
84"	2
96"	2
120"	3



Pallet Rack Upright with Security Panel

- Frames feature welded footplates
- 2" (51 mm) OC beam adjustment
- Hardware included in Pallet Rack Security Door
- Hardware Kit (PRSDHK-1, ordered separately)
- Mounting plates in Pallet Rack Security Door Hinge Hardware Kit (PRSDHHK, ordered separately)
- Standard finishes: Sahara or Blue Gray

PRUSP-(NH)

PRUSP Pallet Rack Upright with Security Panel

NH Nominal Frame Height 120" or 168" (3048 mm or 4267 mm)



Pallet Rack Security Doors

- Secure merchandise by adding Pallet Rack Security Doors to either new or existing Pallet Rack systems
- Built of 2" x 2" (51 mm x 51 mm) wire grid
- Locking device supplied by customer
- Order the Pallet Rack Security Door Hinge Hardware Kit (PRSDHHK) and Pallet Rack Security Deck Hardware Kit (PRSDHK-1) to attach doors to Pallet Rack Frames (ordered separately)
- Standard finishes: Sahara or Blue Gray

PRSD2X2-(NW)(NH)(OPT)

PRSD2X2.... Pallet Rack Security Doors-2"x 2" (51 mm x 51 mm) Grid

> NW.... Nominal Width 48" or 96" (1219 mm or 2438 mm)

NH.... Nominal Height 48", 72", 84", 96", 108" or 120" (1219 mm, 1829 mm, 2134 mm, 2438 mm, 2743 mm or 3048 mm)

OPT.... Security Panel Option: Blank=With Security Panels NSP=No Security Panels



Shown with Hinge Kit (PRSDHHK)

Pallet Rack Security Door **Hinge Hardware Kit**

- Includes all necessary screws and hardware components required to fasten set of Pallet Rack Security Doors, Upper Deck, and Side Security
- Panels to Pallet Rack system
- Standard finishes: Sahara or Blue Gray

PRSDHHK

PRSDHHK.... Pallet Rack Security Door Hinge Hardware Kit

Contents	Quantity
Right-Hand Hinges	2
Left-Hand Hinges	2
Deck Securing Brackets	6
Connecting Plates	6









■ Pallet Rack Security Door **Hardware Kit**

- Includes assortment of nuts, bolts, and washers used to attach:
 - Pallet Rack Side Security Panel [PRSSP-(NH)(ND)]
 - Pallet Rack Security Doors [PRSD2X2-(NW)(NH)(OPT)] (without hinges)
 - ° Pallet Rack Upright with Security Panel [PRUSP-(NH)]
 - Pallet Rack Upper Security Deck [PRUSD-(NW)(ND)]

PRSDHK-1

PRSDHK-1....Pallet Rack Security Door Hardware Kit



Pallet Rack Frame

- Frames feature welded footplates
- 2" (51 mm) OC beam adjustment
- Size availability to 48" (1219 mm) wide and 192" (4877 mm) high
- Allow minimum pallet overhang of 2" (51 mm) front and 2" (51 mm) rear when selecting frame size
- · Standard finishes: Sahara or Blue Gray

PR2(TYPE)F(ND)(NH)

- PR2 Pallet Rack 2" (51 mm) OC
- TYPE HD=Heavy-Duty, RD=Regular-Duty
 - F Frame
- ND.... Nominal Frame Depth 24" to 48" in 6" increments (610 mm to 1219 mm in 152 mm increments)
- NH Nominal Frame Height 72", 84", 96", 108", 120", 132", 144", 168" or 192" (1829 mm, 2134 mm, 2438 mm, 2743 mm, 3048 mm, 3353 mm, 3658 mm, 4267 mm or 4878 mm)



Pallet Rack Upper **Security Deck**

- Eliminate access to merchandise stored on Pallet Rack systems
- Security Deck is fastened to beams using hardware in the Pallet Rack Security Deck Hardware Kit (PRSDHK-1) (ordered separately)
- Brackets in Pallet Rack Security Door Hinge
- Hardware Kit (PRSDHHK, ordered separately)
- Standard finishes: Sahara or Blue Gray



Texas: 214-515-5400 Alabama: 256-839-6354

www.madixinc.com

PRUSD Pallet Rack Upper Security Deck

NW Nominal Width 72" or 96" (1829 mm or 2438 mm)


ND.... Nominal Depth 24" to 48" in 6" increments (610 mm to 1219 mm in 152 mm increments)






Suspended Maxi in Pallet Rack

Designed to merchandise pegged or shelved products in a Pallet Rack section, Suspended Maxi may be used in any section height greater than 72" (1829 mm) and with all beam lengths. The system is depth adjustable and accepts most Maxi Line accessories. Load capacity is 800 pounds.

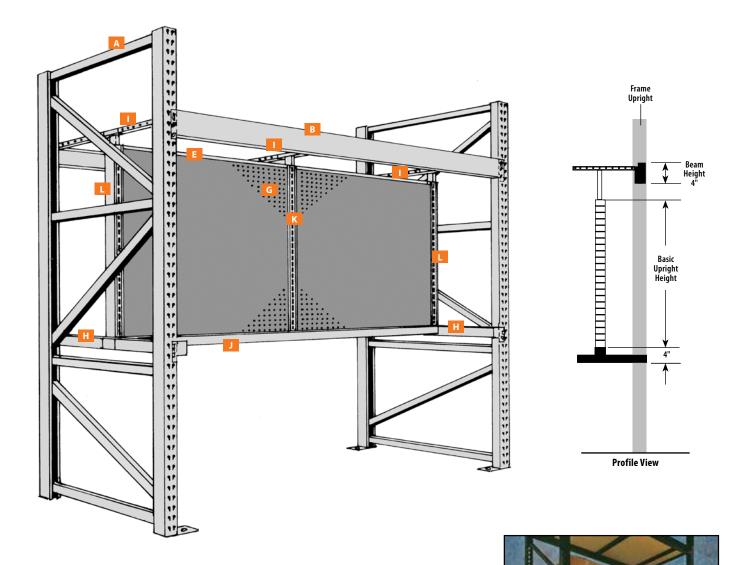


	Description	Part Number	Qty.
Α	Pallet Rack Frames	PR2(TYPE)F(ND)(NH)	As Required
В	Pallet Rack Beams	PR2B(NH)(NL)2	2
C*	Pallet Rack Deck Supports	MPRDS-(ND)	As Required
D*	Pallet Rack Decks	Various decks to choose from	As Required
E	Top Spanner	STL-(NW)	4
F*	Center Spanner	SC-(NW)	2
G	Extension Back Panels, pegboard or hardboard	BX(TYPE)-(NW)(NH)	4
Н	Pallet Rack Basic Upright Support, frame depth	PRBUNDS-(ND)	1 Pair
1	Basic Upright Support Bracket, Modified Omega	MOUSBO-(ND)-F	3
J	Pallet Rack Basic Upright Support, beam length	PRBUNWS-(NL)	1
K	Pallet Rack Basic Upright	PRBU-(NH)	1
L	Pallet Rack Basic Upright, flush side	PRFSBU-(NH)	2
M*	STL Clip	STLCLIP	1 Pair

*Not shown

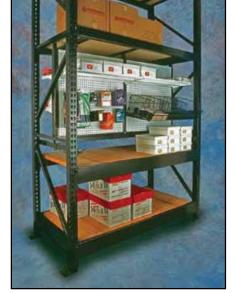



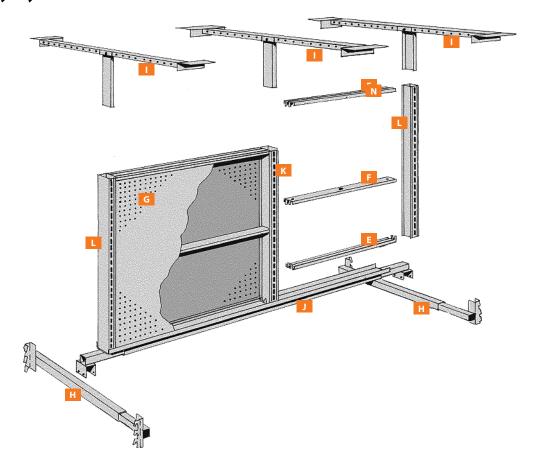

STL-(NW)

STL Top Spanner

NW Nominal Width 3' or 4' (914 mm or 1219 mm)

• STL Clips installed with Top Spanners

SC-(NW)

SC Center Spanner

NW Nominal Width 3' or 4' (914 mm or 1219 mm)

BX(TYPE)-(NW)(NH)

BX Extension Back

TYPE P=Pegboard, H=Hardboard

NW Nominal Width 3' or 4' (914 mm or 1219 mm)

NH Nominal Extension Height 6" to 54" in 6" increments (152 mm to 1372 mm in 152 mm increments)

III PRBUNDS-(ND)

PRBUNDS....Pallet Rack Basic Upright Support

ND....Nominal Depth 36" or 48" (914 mm or 1219 mm)

Pairs

MOUSBO-(ND)-F

MOUSBO.. Modified Omega Basic Upright Support Offset

ND Nominal Depth 36" or 48" (914 mm or 1219 mm)

F.... Floating

PRBUNWS-(NL)

PRBUNWS...Pallet Rack Basic Upright Supports, Beam Length NL....Nominal Length 48", 72" or 96" (1219 mm, 1829 mm or 2438 mm)

PRBU-(NH)

PRBU....Pallet Rack Basic Upright

NH....Nominal Height 24", 30" or 36" (610 mm, 762 mm or 914 mm)

PRFSBU-(NH)

PRFSBU Pallet Rack Basic Upright, Flush Side

NH....Nominal Height 24", 30" or 36"

(610 mm, 762 mm or 914 mm)

M* STLCLIP

STLCLIP....Top Spanner Clip

One pair secures Top Spanner (STL-(NW)

*Not shown


NOTE!

Order the required number of backs for designated units; order separately Hardboard BXH-(NW)(NH) or Pegboard BXP-(NW)(NH)



Pallet Rack Roll Goods Display

Rigid, super-strong display for large rolls or spools of rope, chain, wire, or screening. May be used with or without decks (as shown) for reserve stock.

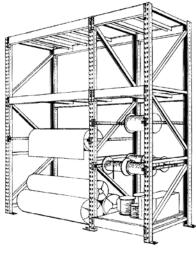

Pallet Rack Center Support Arm

- Telescoping feature shown; allows crossbar to slip easily into upright slots on both sides of frame
- Dart clips lock crossbar in place
- Provides ccross-frame support for roll-goods tube and tube holder

PRCSA-(NW)

PRCSA Pallet Rack Center Support Arm NW Nominal Width 24", 30", 36", 42" or 48" (610 mm, 762 mm, 914 mm, 1067 mm or 1219 mm)



Pallet Rack Roll Goods Tube Holder

- · For mass display of roll goods
- · Accommodates all roll good tubes
- Fits over and bolts to center support arms

HMRGTH

HMRGTH.. Pallet Rack Roll Goods Tube Holder



Pallet Rack Roll Goods Tube

- 1" (25 mm) OD galvanized tubing
- Longer tube lengths are not recommended for numerous heavy spools, rolls of chain, or large rolls of flooring
- Check diameter of spindle hole on spools prior to ordering

PRRGT-(NW)

PRRGT Pallet Rack Roll Goods Tube

NW Nominal Width 24", 30", 36", 42" or 48" (610 mm, 762 mm, 914 mm, 1067 mm or 1219 mm)



Pallet Rack Heavy-Duty Cantilever End Shelf Frame

- · Allows display of product on end of pallet rack runs
- Can be mounted to pallet rack to display above pallets of boxed product
- Requires Pallet Rack Heavy-Duty Cantitlever End Shelf Deck, ordered same size as End **Shelf Frame**

PR2HDFCESFA(NW)(ND)


PR2 Pallet Rack 2" (51 mm) OC

HD Heavy-duty

FCESFA Frame Cantilever End Shelf Frame

NW Nominal Width 24" (610 mm)

ND Nominal Depth 16" (406 mm)



Pallet Rack Heavy-Duty Cantilever End Shelf Deck

• For use with Pallet Rack Heavy-Duty Cantilever End Shelf Frame, ordered same size

PR2HDFCESD(NW)(ND)(OPT)

PR2 Pallet Rack 2" (51 mm) OC


HD Heavy-duty

FCESD Frame Cantilever End Shelf Deck

NW Nominal Width 24" (610 mm)

ND Nominal Depth 16" (406 mm)

U.... Unsealed





Part Number

AFRSPR4747-BLK

AFRSPF(NH)(NW)

HMGFWD-480648

PR2B(NH)(NW)-2


AFRSWD547

WSDC25-1

SFA-EB-1

Create a perfectly stocked Pallet Rack shelf instantly with @Front! @Front incorporates multiple small, rolling tracks that work with gravity to automatically feed merchandise to front of shelf, cutting time and labor necessary for store merchandising and facing. Metal dividers can be easily adjusted in mere seconds, accommodating

bottled, canned, and boxed goods of varying size and shape. Rolling-track system is fully integrated with the shelf itself, little to no maintenance required. Simply remove the entire shelf for a thorough wash, or wipe the rollers with a damp cloth to remove light dust and debris. Unique, patented design uses all plastic construction, allowing roller replacement from top surface (spare rollers integrated into bottom of every shelf). 5° downtilt improves sight lines for better visual impact than other gravity feed systems. Replaces cumbersome, spring pusher systems.

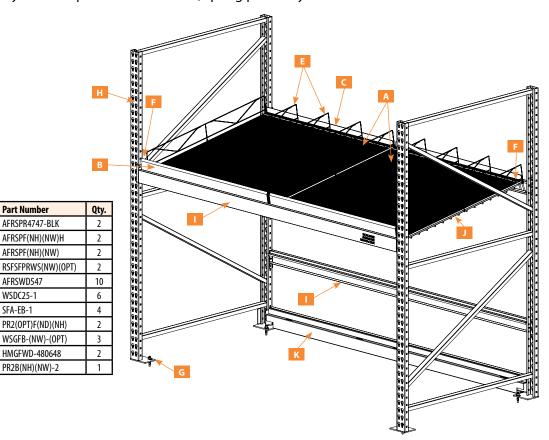

A @Front Roller Mat

Description

@Front Roller Mat, Black

Roller Shelf Offset Front Stop

Seismic Floor Anchor Expansion Bolt

Pallet Rack Frames, Regular-Duty

Wide Span Gravity Feed Beam **Gravity Feed Wire Deck**

@Front Wire Dividers

Wide Span Dart Clip

Pallet Rack Beam

*Not shown

@Front Roller Shelf Plastic Front, 48"W x 4"H

@Front Roller Shelf Plastic Front, 48" W x 2"H

• Mats are 4' wide (1219 mm) and come in two pieces that are 281/2" and 181/2" (724 mm and 470 mm)

AFRSPR4747-BLK

AFRSPR @Front Roller Mat

47 Nominal Width 48" (1219 mm)

47 Nominal Depth 48" (1219 mm)

BLK BLK=Black



® Front Shelf Plastic Front, **Heavy-Duty**

- 3" (76 mm) heavy-duty, plastic fronts
- 3" (76 mm) installed height of 2%" (73 mm)
- Slight bend at the top of the Plastic Front is to face the rear of the shelf
- Fronts can be used with refrigeration, Heavy-Duty, Maxi Line and Gen5 **Roller Systems**

AFRSPF(NH)(NW)H

AFR....@Front

Texas: 214-515-5400 Alabama: 256-839-6354

www.madixinc.com


SPF Shelf Plastic Front

NH Nominal Height 3" (76 mm or 102 mm)

NW Nominal Width 36" or 48"

(914 mm or 1219 mm)

H.... Heavy-Duty






@Front Shelf Plastic Front

- 2" (51 mm) installed height of 11/2" (38 mm)
- Fronts can be used with refrigeration, Heavy-Duty, Maxi Line, and Gen5 Roller Systems

AFRSPF(NH)(NW)

- AFR....@Front
- SPF Shelf Plastic Front
- NH Nominal Height 2" (51 mm)
- NW Nominal Width 36" (914 mm)




@Front Roller Shelf Offset Front Stop for Pallet Rack

- Between inside wall of beam and @Front Roller Shelf
- Two per 8' (2438 mm) section
- Optional heavy-duty available

RSFSFPRWS(NW)(OPT)


- RSFS Roller Shelf Front Stop
- FPRWS for Pallet Rack and Wide Span
 - NW Nominal Width 48" (1219 mm)
 - OPT HD=Heavy-duty



@Front Roller Shelf Wire Divider

AFRSWD547

- AFRS @Front Roller Shelf
- WD Wire Divider
 - 5 Nominal Height 5" (127 mm)
- 47 Nominal Width 48" (1194 mm)




@Front Roller Shelf Divider with Pusher Shelf

- For Pallet Rack application, ensuring very light merchandise (e.g. single paper towel rolls,) is fronted without manual effort
- 6 pack only

AFRSWDPUSH547-6PK

- AFRS @Front Roller Shelf
- WD Metal Divider
- PUSH Pusher
 - 5 Nominal Height 5" (127 mm)
 - 47 Nominal Width 48" (1194 mm)
- 6PK 6 Pack

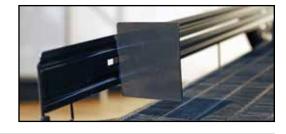

Wide Span Dart Clip

- Spring steel clip secures beam to frame, preventing accidental disengagement
- Two required per beam

WSDC25-1

- WSDC Wide Span Dart Clip
 - 25 Thickness .250" (6 mm)
 - 1 1=1 Pack



G Seismic Floor Anchor Expansion Bolts

- ICBO approved
- 3/8"-16 x 31/2"
- Order two bolts per Seismic Floor Anchor (Regular or Heavy-Duty)

SFA-EB-1

- SFA Seismic Floor Anchor
- EB Expansion Bolt
- 1 1 Pack



H Pallet Rack Frame

- Regular-duty and heavy-duty Frames used available (regular-duty Frame shown in adjacent image)
- Frames feature welded footplates
- 2" (51 mm) OC beam adjustment
- Size availability to 48" (1219 mm) wide and 144" (3658 mm) high
- Allow minimum pallet overhang of 2" (51 mm) front and 2" (51 mm) rear when selecting frame size
- · Standard finishes: Sahara or Blue Gray


PR2(OPT)F(ND)(NH)

- PR2 Pallet Rack 2" (51 mm) OC
- OPT.... HD=Heavy-Duty, RD=Regular-Duty
 - F Frame
 - ND Nominal Frame Depth 24" to 48" in 6" increments (610 mm to 1219 mm in 152 mm increments)
- NH Nominal Frame Height 72", 84", 96", 108", 120", 132" or 144" (1829 mm, 2134 mm, 2438 mm, 2743 mm, 3048 mm, 3353 mm or 3658 mm)

NOTE!

To preclude overturning, the frame depth x 6 cannot exceed height of topmost loaded beam pair, unless all the frames are properly anchored or braced externally





Wide Span Gravity Feed Beam

• Regular-duty and heavy-duty Beams available


WSGFB-(NW)-(OPT)

WS Wide Span

GFB Gravity Feed Beam

NW Nominal Width 36", 42", 48", 60", 72", 84" or 96" (914 mm, 1057 mm, 1219 mm, 1524 mm, 1829 mm, 2134 mm or 2438 mm)

OPT RD=Regular-Duty HD=Heavy-Duty



Gravity Feed Wire Deck

· Wire-grid angled deck

HMGFWD-480648


HM Hypermaxi

GFWD Gravity Feed Wire Deck

48 Nominal Depth 48" (1219 mm)

06 Beam Drop 6" (152 mm)

48 Nominal Width 48" (1219 mm)



K Pallet Rack Beam

- Available in three heights for differing load capacities
- Step depth accommodates 2" (51 mm) dimensional lumber decking, or wire decking
- Beams are slotted in step to accept deck supports under decking
- Standard finishes: Sahara or Blue Gray

PR2B(NH)(NW)-2


PR2 Pallet Rack 2" (51 mm) OC

B.... Beams

NH Nominal Beam Height 35=3½" (89 mm) 50=5" (127 mm) 60=6" (152 mm)


NW.... Nominal Width 36", 48", 60", 72, 84", 96",108" 120", 132" or 144" (914 mm, 1219 mm, 1524 mm, 1829 mm, 2134 mm, 2438 mm, 2743 mm, 3048 mm, 3353 mm or 3658 mm)


2 Step 2 Only



Wide Span

Finished units are extremely rigid, eliminating back and side sway, and no assembly hardware means rapid installation. Frames, beams, and deck supports are fabricated from heavy-gauge steel finished in Blue Gray or Sahara. Decks are %" (16 mm) particle board.

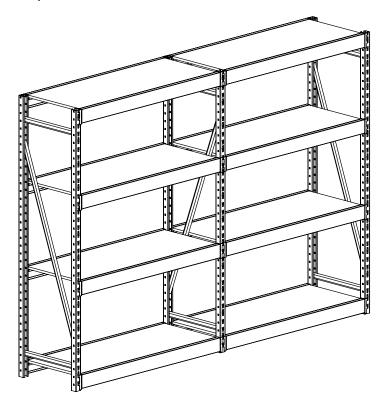



Beam Loading

Maximum Load Capacity per Beam Pair

Beam Length	Light- Duty	Regular- Duty	Heavy- Duty	Number of Supports for Wood Decks	Number of Supports for Wire Decks
48"	1000 #	1600 #	3000 #	2	2
60"	1000 #	1600 #	3000 #	3	4
72"	1000 #	1600 #	3000 #	3	4
84"	1000 #	1600 #	3000 #	3	4
96"	1000 #	1600#	3000#	3	4


Based on evenly distributed loads and 96" beam length, all frame widths

Wide Span Frame Loading

- Frame loading is the vertical load, measured in pounds, that can be applied on any frame
- Each frame bears one-half of the load of each beam pair that it supports
- All frames have 10,000 lb load capacity

NOTE!

Powered fork trucks on stackers are not recommended for use on Wide Span Shelving.

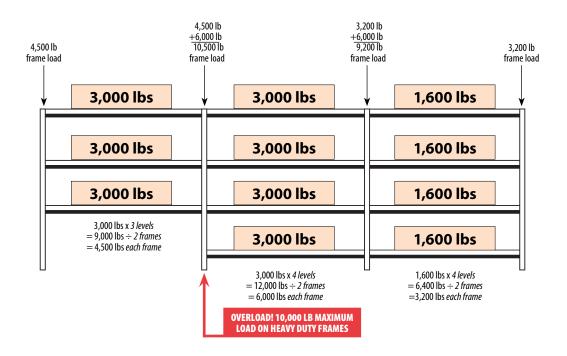

Wide Span Frame

- Heavy-gauge, 1¾" (44 mm), square, upright members with welded cross braces are slotted
- 2" (51 mm) OC for adjustability
- Heavy-Duty Frame has additional bracing to resist accidental stacker impact
- Top beam fits flush to top of frame
- Requires a minimum of two decks and four beams per section
- Standard finishes: Sahara or Blue Gray

(TYPE)WSF(ND)(NH)-(OPT)


TYPE RD=Regular-Duty HD=Heavy-Duty

WSF Wide Span Frame

ND Nominal Frame Depth 18" to 48" in 6" increments (457 mm to 1219 mm in 152 mm increments)


NH.... Nominal Frame Height 48" to 120" in 12" increments (1219 mm to 3048 mm in 305 mm increments)


OPT Blank=as shown FA=Floor Anchor

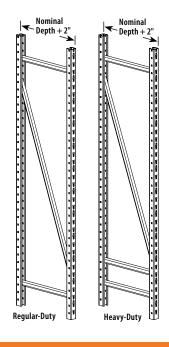

NOTE!

To preclude overturning, the frame depth x 6 cannot exceed height of topmost loaded beam pair, unless all the frames are properly anchored or braced externally.



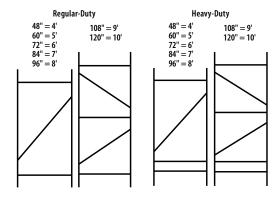

Wide Span Beam

- Heavy gauge beam body with integral connectors fits snugly into upright slots and maintains deck alignment with basic fixture slotting
- · One beam pair required per deck
- Wide Span Decks ordered separately
- Standard finishes: Sahara or Blue Gray

(TYPE)WSFB(NL)


TYPE LD=Light-Duty RD=Regular-Duty HD=Heavy-Duty

WSFB Wide Span Front Beam


NL Nominal Length

48" to 96" in 12" increments

(1219 mm to 2438 mm in 305 mm increments)

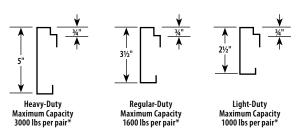

^{*}Based on evenly distributed loads, 96" beam lengths, all frame lengths



Regular-Duty Wide Span Front Beam with Tag Molding

- Optional Tag Molding for Regular-Duty Wide Span Front Beams only
- Molding is pop-riveted on to beam:
 - Standard tag position is center of beam
 - ° Upper tag position is ¾" (10 mm) from top of beam
 - Flush tag position is top of beam

RDWSFB(NW)-(U)-(TAG)-(UD)-(FT)

RDWSFB....Regular-Duty Wide Span Front Beam

NW Nominal Width

36" to 96" in 12" increments (914 mm to 2438 mm in 305 mm increments)

U....U=Upper

Blank=Standard

TAG....DGA or M17 and Color

UD....UD=Upside Down Tag Blank=Right Side Up Tag

FT....Flush Top Tag Blank=Standard





Wide Span Top Cap

- Clear plastic cap inserts into top of upright
- Allows beam to be mounted in top slot of upright

WSTC-1-CL

WSTC Wide Span Top Cap

1 1=1 Pack

CL Clear Plastic



Wide Span Dart Clip

- Spring steel clip secures beam to frame, preventing accidental disengagement
- Two required per beam

WSDC25-50

WSDC Wide Span Dart Clip

25 Thickness .250" (6 mm)

50 50= 50 Pack



Wide Span Deck Support

- Formed steel component easily rotates into place, ties beams together, and supports deck
- Standard finishes: Sahara or Blue Gray

(TYPE)WSDS(ND)

TYPE LD=Light-Duty RD=Regular-Duty HD=Heavy-Duty

WSDS Wide Span Deck Support

ND Nominal Depth 18" to 48" in 6" increments (457 mm to 1219 mm in 152 mm increments)



Deck Supports per Beam Length				
Beam Length	Supports for Wood Decks	Supports for Wire Decks		
48"	2	2		
60" to 72"	3	4		
84" to 96"	3	4		







Regular-Duty Light-Duty

Wide Span Deck Support, Economy

- Formed steel component easily rotates into place, ties beams together and supports deck
- · Galvanized finish only

RDWSDSE(ND)


RD Regular-Duty

WSDS Wide Span Deck Support

E Economy

ND Nominal Depth 18" to 48" in 6" increments (457 mm to 1219 mm in 152 mm increments)

Deck Supports per Beam Length						
Beam Length Supports for Wood Decks Supports for Wire Decks						
48"	2	2				
60" to 72"	3	4				
84" to 96"	3	4				



Wide Span Deck

- Regular-Duty Decks are durable 5/8" (16 mm) particle board
- Heavy-Duty Decks are %" (16 mm), 45 lb density particle board for increased load capacity

(TYPE)WSD(ND)(NL)-U

TYPE RD=Regular-Duty

HD=Heavy-Duty


WSD Wide Span Deck

ND Nominal Frame Depth 18" to 48" in 6" increments (457 mm to 1219 mm in 152 mm increments)

NL Nominal Frame Length 48" to 96" in 12" increments (1219 mm to 2438 mm in 305 mm increments)

U Unsealed







Wide Span Deck Kit, Wire Grid

- Deck Kit includes two beams, correct number of deck supports, plus one deck for ease of ordering; deck kits over 48" (1219 mm) in length, two decks are included
- · One kit required per level of shelving
- Dart Clips for beam locking are not included; four Wide Span Dart Clips (WSDC25-50) are required per kit
- Sturdy wire, 5/16" (8 mm) gauge in diameter, is welded on 3" (76 mm) grid centers
- 3" x 3" (76 mm x 76 mm) is one piece up to 96" (2438 mm) wide
- Standard finishes for Wire Grid: Silver Vein, Sahara and Blue Gray
- Standard finishes for metal components: Sahara or Blue Gray

(TYPE)WSK(ND)(NL)-WG

TYPE LD=Light-Duty RD=Regular-Duty HD=Heavy-Duty

WSK Wide Span Deck Kit


ND Nominal Frame Depth

18" to 48" in 6" increments

(457 mm to 1219 mm in 152 mm increments)

NL Nominal Frame Length 48" to 96" in 12" increments (1219 mm to 2438 mm in 305 mm increments)

WG Wire Grid

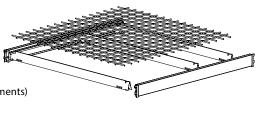

Maximum Load Capacity per Beam Pair							
Type of	Beam Length						
Deck Supports	48" 60" 72" 84" 96"						
Light-Duty	1000# 1000# 1000# 1000# 1000#						
Regular-Duty	1600# 1600# 1600# 1600# 1600#						
Heavy-Duty	3000# 3000# 3000# 3000# 3000#						
# of Deck Supports	2	4	4	4	4		

Based on evenly distributed loads and 96" length beam, all frame widths

Wide Span Deck Kit

- Deck Kit includes two beams, correct number of deck supports, plus one deck for ease of ordering
- · One kit required per level of shelving
- Dart Clips for Beam locking are not included, four Wide Span Dart Clips (WSDC25-50) are required per kit
- Regular-duty uses economy deck supports
- Standard finishes for metal components: Sahara or Blue Gray

NOTE!Substitute -S for -U in part number, add \$2.00 per deck.

(TYPE)WSK(ND)(NL)-U


TYPE LD=Light-Duty RD=Regular-Duty HD=Heavy-Duty

WSK Wide Span Deck Kit

ND Nominal Frame Depth 18" to 48" in 6" increments (457 mm to 1219 mm in 152 mm increm

NL Nominal Frame Length 48" to 96" in 12" increments (1219 mm to 2438 mm in 305 mm increments)

U.... Unsealed



Maximum Load Capacity per Beam Pair								
Type of	Beam Length							
Deck Supports	48" 60" 72" 84" 96"							
Light-Duty	1000# 1000# 1000# 1000# 1000#							
Regular-Duty	1600# 1600# 1600# 1600# 1600#							
Heavy-Duty	3000# 3000# 3000# 3000# 3000#							
# of Deck Supports	2	3	3	3	3			

Based on evenly distributed loads and 96" length beam, all frame widths

Wide Span Wire Grid Deck

- Sturdy 5/16" (8 mm) diameter gauge wire welded on 3" (76 mm) grid centers
- Deck Supports are NOT included; order per chart
- 3" x 3" (76 mm x 76 mm) is one piece up to 96" (2438 mm) wide
- Standard finishes: Silver Vein, Sahara and Blue Gray
- Suggested finish is Silver Vein, a black/silver combination coating thatis highly resistant to abrasion and retains original appearance despite hard usage

WSWMS(ND)(NL)-3

WS Wide Span

WMS Wire Grid Deck

ND Nominal Frame Depth 18" to 48" in 6" increments (457 mm to 1219 mm in 152 mm increments)


NL Nominal Frame Length 24" to 96" in 6" increments (610 mm to 2438 mm in 152 mm increments)

3 Grid Size 3" OC (76 mm)



Wire grid piece length runs parallel to beam length

В	minal eam ngth	Required Quantity of Deck Supports
	36"	2
4	48"	2
(50"	4
	72"	4
	34"	4
9	96"	4

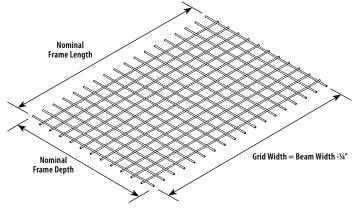

Flow Through Wide Span Deck

- Flow Through Wide Span Decks are pieced for ease of handling
- Sturdy wire, 5/16" (8 mm) gauge in diameter, is welded on 3" (76 mm) grid centers
- Deck Supports are NOT included; order per chart
- Standard finishes: Silver Vein, Sahara and Blue Gray

FTWSD-(ND)(NL)

FT Flow Through

WSD Wide Span Deck


ND Nominal Frame Depth 18" to 48" in 6" increments (457 mm to 1219 mm in 152 mm increments)

NL.... Nominal Piece Length 24" to 48" in 6" increments (610 mm to 1219 mm in 152 mm increments)



Wire grid piece length runs parallel to beam length

g p. c.c g paramer to a cameron g					
Deck Type	Nominal Beam Length	Combine these Piece Lengths to equal Beam Length	Required Quantity of Deck Supports		
One-Piece	36"	36"	2		
Decks	48"	48"	2		
	60"	30"+ 30"	4		
Two-Piece	72"	36"+ 36"	4		
Decks	84"	42"+ 42"	4		
	96"	48"+ 48"	4		

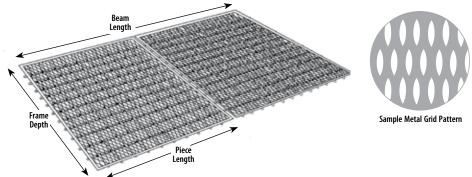

Frame Depth X Piece Length	Actual Frame Depth X Actual Piece Length	Frame Depth x Piece Length	Actual Frame Depth x Actual Piece Length
18"x 24"	17¾" x 23¾"	36"x 24"	35¾" x 23¾"
18"x 36"	17¾" x 35¾"	36"x 36"	35¾" x 35¾"
18"x 48"	17¾" x 47¾"	42"x 24"	41¾" x 23¾"
24"x 24"	23¾" x 23¾"	42"x 36"	41¾" x 35¾"
30"x 30"	29¾" x 29¾"	42"x 42"	41¾" x 41¾"
24"x 48"	23¾" x 47¾"	42"x 48"	41¾" x 47¾"
30"x 24"	29¾" x 23¾"	48"x 24"	47¾" x 23¾"
30"x 36"	29¾" x 35¾"	48"x 36"	47¾" x 35¾"
30"x 48"	29¾" x 47¾"	48"x 48"	47¾" x 47¾"

Wide Span Low Profile Metal Deck

- Metal Decks run perpendicular to beams
- Decks not affected by moisture; will not absorb spills
- Deck Supports are NOT included; order per chart
- · Standard finishes: Sahara and Blue Gray


WSL	.PMD	06	(ND)	١

WS Wide Span

LPMD Low Profile Metal Deck

06 6" wide slat

ND Nominal Frame Depth 18" to 36" in 6" increments (457 mm to 914 mm in 152 mm increments)



Maximum Load Capacity per Beam Pair						
Type of	Beam Length					
Deck Supports	48" 60" 72" 84" 96"					
Light-Duty	1000#	1000#	1000#	1000#	1000#	
Regular-Duty	1600#	1600#	1600#	1600#	1600#	
Heavy-Duty	3000# 3000# 3000# 3000# 3000#					
# of Deck Supports	2	3	3	4	4	
# of Metal Decks	8	10	12	14	16	


Based on evenly distributed loads and 96" lenath beam, all frame widths



Wide Span Wire Grid Deck, 1 x 6

- Wire Grid Decks are pieced for ease of handling
- Sturdy wire, 5/16" (8 mm) gauge in diameter, is welded on 1" x 6" (25 mm x 152 mm)
- Deck Supports are NOT included; order per chart
- Standard finishes: Silver Vein, Sahara and Blue Gray

Deck Supports per Beam Length				
Beam Length Supports				
48"	2			
54" to 72"	3			
84" to 96"	4			



WSWMS(ND)(NL)-16 WS Wide Span

WMS Wire Grid Deck

or 914 mm) NL Nominal Piece Length

16 1"x 6" Grid

ND Nominal Frame Depth

20", 22", 24", 30" or 36"

(508 mm, 559 mm, 610 mm, 762 mm

(762 mm, 914 mm, 1219 mm, 1524 mm,

30", 36", 48", 60", 72", 84" or 96"

1829 mm, 2134 mm or 2438 mm)

41	ш	Ш	ш	Ш		
					brack	Ĺ
						ĺ
गा					יון	'
Sampl	e Me	etal	Grid	Pat	tern	

To the		
	The Transfer	
L'		

Frame Depth x Piece Length	Actual Frame Depth x Actual Piece Length	Frame Depth x Piece Length	Actual Frame Depth X Actual Piece Length
20"x 36"	19¾" x 36"	24"x 72"	23¾" x 72"
20"x 48"	19¾" x 48"	24"x 84"	23¾" x 84"
20"x 60"	19¾" x 60"	24"x 96"	23¾" x 96"
20"x 72"	19¾" x 72"	30"x 36"	29¾" x 36"
20"x 84"	19¾" x 84"	30"x 48"	29¾" x 48"
20"x 96"	19¾" x 96"	30"x 60"	29¾" x 60"
22"x 36"	21¾" x 36"	30"x 72"	29¾" x 72"
22"x 48"	21¾" x 48"	30"x 84"	29¾" x 84"
22"x 60"	21¾" x 60"	30"x 96"	29¾" x 96"
22"x 72"	21¾" x 72"	36"x 36"	35¾" x 36"
22"x 84"	21¾" x 84"	36"x 48"	35¾" x 48"
22"x 96"	21¾" x 96""	36"x 60"	35¾" x 60"
24"x 36"	23¾" x 36"	36"x 72"	35¾" x 72"
24"x 48"	23¾" x 48"	36"x 84"	35¾" x 84"
24"x 60"	23¾" x 60"	36"x 96"	35¾" x 96"

Wide Span Waterfall Grid Deck

- Wire Grid Decks are pieced for ease of handling
- Sturdy wire, 5/16" (8 mm) gauge in diameter, is welded on 3" x 3" (76 mm x 76 mm) grid centers
- Integrated deck supports eliminate standard deck supports
- · Standard finishes: Silver Vein, Sahara and Blue Gray


WSWFGD-(ND)(NL)

WS Wide Span

WFGD Waterfall Grid Deck

ND Nominal Frame Depth 18" to 48" in 6" increments (457 mm to 1219 mm in 152 mm increments)

NL Nominal Piece Length 24" to 48" in 6" increments

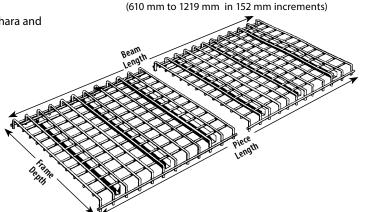

Nominal Beam Length	Combine these Piece Lengths to equal Beam Length		
36"	36"		
48"	48"		
60"	30"+ 30"		
72"	36"+ 36"		
84"	42"+ 42"		
96"	48"+ 48"		
108"	36"+36" + 36"		
120"	36"+48" + 36"		
132"	48"+ 36" + 48"		
144"	48"+ 48" + 48"		

Deck Supports per Beam Length			
Beam Length Supports			
48"	2		
54" to 72"	3		
84" to 96"	4		

Wide Span Frame Connectors

- · Heavy-gauge channel with hardware for connecting any two frames, to obtain overall heights from 168" to 240" (4267 mm to 6096 mm)
- · Available in packages of two only
- One package required for each frame
- Standard finishes for metal components: Sahara or Blue Gray

WSFC-2

www.madixinc.com

Texas: 214-515-5400 Alabama: 256-839-6354

WSFC Wide Span Frame Connectors 2 2 Pack





Wide Span Floor Anchor

- Heavy-gauge, galvanized-steel angle secures frame to floor
- Maintains aisle alignment and prevents tipping
- Hardware included to attach Wide Span Floor Anchor to Frame
- Concrete anchoring studs not included due to varying field conditions
- Galvanized finish only

WSFA-2

WSFA Wide Span Floor Anchor 2 2 Pack

NOTE!

Hole is sized for ½" floor anchors, order Pallet Rack Floor Anchor Kit (PRFAK-4)



Wide Span Floor Anchor with Nut & Bolt

- Add a Floor Anchor Plate to a Wide Span Frame that does not have a footplate
- Can be added to a Wide Span Frame that has a footplate and the anchoring on either side of the Wide Span Upright
- Floor Anchor Bolts not included Floor Anchors could keep beam being installed in the lowest slot on the Wide Span Upright
- Floor anchor might interfere with pallets and pallet jacks if no lower beam is used
- · Galvanized finish only

WS-FANB

WS Wide Span FANB Floor Anchor with Nut & Bolt

NOTE! packs per frame.




Wide Span Back-to-Back Connector

- Heavy-gauge-steel straps maintain 2" (51 mm) spacing between frames to allow repositioning of rear beams
- · Hardware included for securing straps to frames
- · Six connectors required for any height or combination of height frames
- · Floor Anchor might interfere with pallets and pallet jacks if no lower beam is used
- · Galvanized finish only

WSBBC-2-24

WSBBC-2.... Wide Span Back-to-Back Connectors 24 24 Pack



Wide Span Leveling Shim

- Galvanized 1/16" (2 mm) shim has dimples to prevent dislodging from bottom of **Upright Frame**
- Use where floor protection is required or to level frames on uneven floors
- · Galvanized finish only

WSLS-10

WSLS Wide Span Leveling Shim 10 10 Pack



Wide Span Back-to-Back Side **Mount Rug Display Bar**

- Displays rugs in a tiered fashion for better exposure
- Can be used to display taller products, long-handled tools, beach and patio umbrellas, or flag poles
- · Crossbars create end caps, turning unused space into attention-getting displays
- Use 48" (1219 mm) bolted on 48" (1219 mm) single Wide Span
- Use 96" (2438 mm) bolted on 48" (1219 mm) back-to-back Wide Span


WSBBSMRD(NL)(ND)


WS Wide Span

BBSMRD... Back-to-Back Side Mount Rug Display Bar

NL Nominal Length 48" or 96" (1219 mm or 2438 mm)

ND 04=4" (102 mm) 06=6" (152 mm) 08=8" (203 mm)





Recessed Pegboard Panel

- Framed pegboard panel for use with frame shown to merchandise blister pack and other pegged items within Wide Span section
- Increase impulse sales with cross merchandising
- Use combinations of panels for heights not listed
- · Satin finish frame
- · Standard finishes: Sahara or Blue Gray

RPP-(NW)(NH)

RPP Recessed Pegboard Panels

NW Nominal Width 4=48" or 8'=96" (1219 mm or 2438 mm)

NH Nominal Height 06" to 18" in 6" increments (152 mm to 457 mm in 152 mm increments)



Recessed Pegboard Panel Frame


- Frame assembly for use with Recessed Pegboard Panel
- Includes two brackets, reinforcing angle, and necessary hardware
- Two frames required per panel
- Recess depth shown is from front of Wide Span Upright
- Standard finishes: Sahara or Blue Gray

RF-(NW)(NH)

RF Recessed Pegboard Panel Frame

NW Nominal Width 4=48" or 8'=96" (1219 mm or 2438 mm)

NH Nominal Height 06" to 18" in 6" increments (152 mm to 457 mm in 152 mm increments)



Wide Span Product Retainer


- The Wide Span Product Retainer has hooks to fit Wide Span Uprights, formed lower edge fits into beam step for security
- Two heights available; may be used with or without dividers
- · Standard finishes: Sahara or Blue Gray

WSPR(NH)(NL)

WSPR.... Wide Span Product Retainer

NH.... Nominal Height 3" or 6" (76 mm or 152 mm)

NL Nominal Length 48" or 96" (1219 mm or 2438 mm)



Wide Span Product Divider

- Formed metal divider freestands on particle board deck to allow binning
- Pre-punched to allow fastening to deck Two heights available, depths to match all Wide Span depths
- May be used in conjunction with Wide Span Product Retainer
- · Standard finishes: Sahara or Blue Gray

WSPD-(NH)(NL)

WSPD Wide Span Product Divider

NH Nominal Height

3" or 6" (76 mm or 152 mm)

NL.... Nominal Length
18" to 48" in 6" increments
(457 mm to 1219 mm in 152 mm increments)



Wide Span End Frame Kick Plate

- Dresses up the end of the Wide Span Frames
- Install, as shown, at the base of the Wide Span Frame
- The Wide Span End Frame Kickplate [WSEFKP (ND)-(COLOR)] can also be installed at the top of the Wide Span Frame


WSEFKP(ND)-(COLOR)

WSEFKP.... Wide Span End Frame Kickplate

ND.... Nominal Depth 24", 30", 36", 46" or 48" (610 mm, 762 mm, 914 mm, 1168 mm or 1219 mm)

COLOR B=Black DG=Dove Grey SA=Sahara



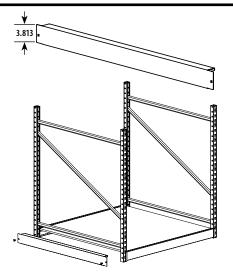



Wide Span Molding Rack Beams

- Add Molding Rack Beams and Vertical Divider Arms to standard Wide Span Frames to create an attractive Molding Rack
- Beam Kits include top, middle, bottom and front beams
- Mount front beam one slot higher than rear beam for a sloped deck; adding a front retainer beam keeps molding in place
- Secure beams by bolting through frames in all situations
- Individual Beams:
 - °Top Beam-2" standoff
 - o Middle Beam-8" standoff

 Bottom Beam–14" standoff • Standard finishes: Sahara or Blue Gray

WSMR(TYPE)-(NL)(ND)

WSMR Wide Span Molding Rack

TYPE K=Kits

B=Individual Beams

NL Nominal Length 48" to 96" in 12" increments

(1219 mm to 2438 mm in 304 mm increments)

ND Nominal Depth

2" to 14" in 6" increments

(50 mm to 355 mm in 152 mm increments)


LDWSFB(NL)


LD Light-Duty

WSFB Wide Span Front Beam

NL Nominal Length

48" to 96" in 12" increments (1219 mm to 2438 mm in 304 mm increments)

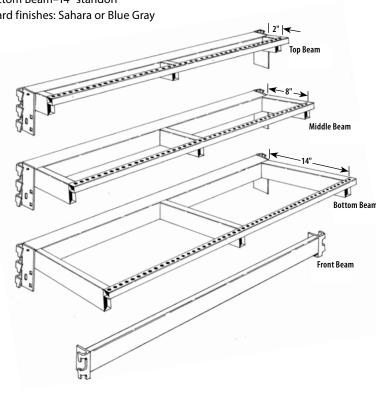

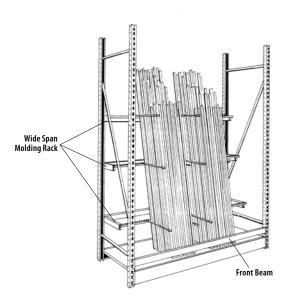

Suspended Wide Span

- Split Wide Span section into a smaller section to spotlight product
- · No disassembly of section to install
- · Load capacity 200 lbs for entire Hanging Wide Span section
- · Standard finishes: Sahara or Blue Gray

Q10871-(NH)(NL)-2

Q10871 Adjustable Tire Beam

NH Nominal Beam Height 35=31/2" (89 mm)

50=5" (127 mm) 60=6" (152 mm)

NL Nominal Length 36"-96" in 6" increments (914 mm-2438 mm in 152 mm increments)

2 Step-2

SWSFA

SWSFA Suspended Wide Span Frame Adapter

Hanging Wide Span				
Part Number	ber Part Description		Notes	
Q10871-(NH)(NW)-2	Adjustable Tire Beam	2		
SWSFA	Suspended Wide Span Frame Adapter	1		
(TYPE)WSF(ND)(NH)	Wide Span Frame	1	Match depth of section	
(TYPE)WSDS(ND)	Wide Span Deck Support	as needed		
Wide Span Decking	any deck (wood/wire)	as needed		




Wide Span Vertical Divider Beam

- Use Vertical Divider Beam, Regular- or Heavy-Duty Vertical Divider Arms or other VDB accessories
- Unit includes Modified Wide Span Beam, punched tubing, and required hardware for assembly
- Madix recommends bolting beam to Wide Span Frame in heavy loading situations
- Standoff from beam face approximately 3" (76 mm)
- Standard finishes: Sahara or Blue Gray

WSVDB(NL)

WSVDB Wide Span Vertical Divider Beam

NL Nominal Length 36", 48", 60", 84", 96" or 108" (914 mm, 1219 mm, 1524 mm, 2134 mm or 2438 mm)



Vertical Divider Arms


- Attaches straight in to the crossbar, or can be affixed at a 45° angle in either direction
- Regular-Duty Divider Arms .40" (10 mm) diameter with red neoprene safety tip
- Heavy-Duty Divider Arms 1" (25 mm) square tubing with vinyl safety cap
- Standard finishes: Sahara or Blue Gray

VDA-(NL)(TYPE)

VDA Vertical Divider Arms

NL Nominal Divider Length 10" to 18" in 2" increments, Regular-Duty (254 mm to 457 mm in 51 mm increments) 20" to 30" in 2" increments, Heavy-Duty (508 mm-762 mm)

TYPE R=Regular-Duty H=Heavy-Duty



Threaded Vertical Divider Arms


- Mounts straight out from the Vertical Divider Bar, or can be affixed at a 45° angle in either direction
- Arms may be mounted to front and/or rear of standoff bars
- Regular-duty divider arms .40" (10 mm) diameter with red neoprene safety tip
- Heavy-duty arms 1" (25 mm) square tubing with vinyl safety cap
- Threaded option locks arm
- Standard finishes: Sahara or Blue Gray


TVDA-(NL)(TYPE)

TVDA Threaded Vertical Divider Arm

NL 6" to 20" in 2" increments, Regular-Duty (152 mm to 508 mm in 51 mm increments) 12" to 30" in 2" increments, Heavy-Duty (305 mm-762 mm in 51 mm increments)

TYPE R=Regular-Duty H=Heavy-Duty





Vertical Divider Arm with Price Tag Holder

- · Available in regular-duty only
- Regular-duty divider arms .40" (10 mm) diameter with red neoprene safety tip
- Price Tag Holder 3"W x 1½"H (76 mm x 38 mm)
- Standard finishes: Sahara or Blue Gray


VDA-(NL)R-PTH

VDA Vertical Divider Arms

NL Nominal Divider Length 04" to 22" in 2" increments (102 mm to 559 mm in 51 mm increments)

R Regular-Duty

PTH Price Tag Holder



Vertical Divider Arm Heavy-Duty Scan Hook

- · Available in heavy-duty only
- Price Tag Holder size 3"W x 1½"H (76 mm x 38 mm)
- Standard finishes: Sahara or Blue Gray


VDAHDSH-(NL)

VDA Vertical Divider Arms

HD Heavy-Duty

SH Scan Hook

NL Nominal Length
6" to 20" in 2" increments
(152 mm to 508 mm in 51 mm increments)





Vertical Divider Arm with 45° Hook

- · Available in regular-duty only
- 45° hook securely holds merchandise onto arm
- · Standard finishes: Sahara or Blue Gray

VDA-(NL)R-45


VDA Vertical Divider Arms

NL Nominal Frame Length 6" to 22" in 2" increments

(152 mm to 559 mm in 51 mm increments)

R.... Regular-Duty

45 45° Hook



Vertical Divider Arm Heavy-Duty with Front Lip

- · Available in heavy-duty only
- · Standard finishes: Sahara or Blue Gray

VDA-(ND)H-FL


VDA Vertical Divider Arms

ND Nominal Depth 16" to 24" in 2" increments

(406 mm to 610 mm in 51 mm increments)

H.... Heavy-Duty

FL Front Lip



Vertical Divider Arm with 15° **Uptilt, Heavy-Duty**

- · Available in heavy-duty only
- Standard finishes: Sahara or Blue Gray


VDA15DU-(NL)H

VDA Vertical Divider Arm

15DU 15° Uptilt

NL Nominal Length 12" to 24" in 2" increments (305 mm to 610 mm in 51 mm increments)

H.... Heavy-Duty



Wide Span Garden Tool Display Bar

- Heavy-duty upright channel welded to Wide Span brackets
- May be used on both Wide Span and Pallet Rack uprights
- · Allows use of beam-mounted accessories with locking clips- no hardware required
- · Standard finishes: Sahara or Blue Gray

WSGTDB-(NL)

WS Wide Span

GTDB Garden Tool Display Bar

NL Nominal Length 48" or 96" (1219 mm or 2438 mm)



Wide Span Single Hook Display

- Single arm for crossbar
- Fits Garden Tool Display Bar
- · Standard finishes: Sahara or Blue Gray

WSSHD-(ND)

WS Wide Span

SHD Single Hook Display

ND Nominal Depth

. 18", 24", 30" or 36"

(457 mm, 610 mm, 762 mm or 914 mm)



Wide Span Garden Tool Display Double Hook

- Double, round, tube arm
- Fits on Garden Tool Display Bar
- Standard finishes: Sahara or Blue Gray

WSGTDH-(ND)

WS Wide Span

GTDH Garden Tool Double Hook


ND Nominal Depth


18", 24", 30" or 36"

(457 mm, 610 mm, 762 mm or 914 mm)









Wide Span, Inside-Mount, **Forward-Facing Peg Hook**

- Mounts on Wide Span or Hypermaxi regular-duty beams
- Designed for lightweight products
- Mounts by simply twisting onto the back of beam and locking in place


PHWSIMFF10-RD

PHWS Peg Hook Wide Span

IMFF Inside Mount Front Facing

10 Nominal Length 10" (254 mm)

RD Regular-Duty





Wide Span, Regular-Duty, Beam-Mounted, Long-Handled **Tool Hook**


- Mounts on Wide Span or Hypermaxi regular-duty beams
- · Designed to display power trimmers in front of boxed stock

WSRDBMLHTH-06

WSRD Wide Span Regular-Duty

BMLHTH... Beam Mounted, Long-Handled Tool Hook

06 Nominal Length 06" (152 mm)



Wide Span Sign Holder, Adjustable Height, Top-Post-**Mounted Arm**

- · Slides into Wide Span Upright; weld nut secures sign frame
- Adjustable height
- Comes with hardware pack
- Standard finishes: Sahara or Blue Gray

WSSHAHTPMA-366022

WSSH.... Wide Span Sign Holder

AHTPMA.... Adjustable Height Top Post Mounted-Arm

3660 Height Range 36" to 60" (914 mm to 1524 mm)

...Nominal Length 22" (559 mm)





Hypermaxi & Wide Span Sian Holder

- Mounts in Hypermaxi or Wide Span uprights and frames
- Front-facing option faces into aisle
- End-facing option faces over the end cap or at the end of a shelving run
- Includes black cap at the end of wire
- Hook-to-hook length: 12"=6.5" and 18"=10.5" (305 mm=155 mm and 457 mm=267 mm)
- · Sign graphics not included

HMSASH(NL)(NH)(OPT1)(OPT2)

HM Hypermaxi


SASH Single Arm Sign Holder

NL Height Length 12" or 18" (305 mm or 457 mm)

NH Nominal Height 06" to 42" in 6" increments (152 mm to 1067 mm in 152 mm increment)

OPT1 Blank=Arched Arm SA=Straight Arm

OPT2 E=End Facing F=Front Facing



End Facing



Heavy-Duty Merchandise Hanger

- Easily display and hang heavy products
- Uses Hypermaxi with Pallet Rack beams and deck supports (see below for part numbers; as shown in photo)

B HMFTB3548-2

HMFTB Hypermaxi Front Tire Beam

35 Nominal Height 35=3.5" (89 mm)

48 Nominal Length 48=48" (1219 mm)

2 Step-2


MPRDSWHB-(OPT1)-(OPT2)

MPRD Pallet Regular-Duty

SWHB Support Wire Hanger Bracket

OPT1 Wire Size 301=.301 Gauge

OPT2 3=3" (76 mm) 4=4" (102 mm) 5=5" (127 mm)



HMRTB3548-2

HMRTB Hypermaxi Rear Tire Beam

35 Nominal Height 35=3.5" (89 mm)

48 Nominal Length 48=48" (1219 mm)

2 Step-2

MPRDS-24

MPRDS Pallet Rack Deck Support 24 24=24" (610 mm)





Roll-Around Wide Span Unit

- Unit has four swivel casters and comes equipped with locking mechanism to securely hold the unit in place
- 42"W (1067 mm) optional sign holder will hold a 41"W x 15"H x ⅓"D (1041 mm x 381 mm x 8 mm) sign
- 48"W (1219 mm) optional sign holder will hold a 47"W x 5"H x 1/8"D (1193 mm x 381 mm x 8 mm) sign
- · Load capacity is 2800 lbs
- Standard finishes: Sahara or Blue Gray

D	escription	Qty.
Α	Regular-Duty Wide Span Frame	As Required
B*	Regular-Duty Wide Span Deck Support	2
C	Regular-Duty Wide Span Beams	As Required
D	%" Particle Board Decks	As Required
E	4" Swivel Caster	4
F	Locking Mechanism	2

*Regular-Duty Wide Span Deck Support is not visible

RAWSU-24(NW)60(OPT)

RAWSU Roll-Around Wide Span Unit


24 Nominal Depth 24" (610 mm)

NW Nominal Width

42" or 48" (1067 mm or 1219 mm)

60 Nominal Height 60" (1524 mm)

OPT.... Sign Option:
Blank=Sign Holder

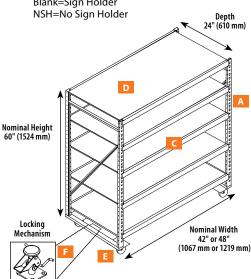





Wide Span Roll Goods Display

- Rigid, super-strong display for roll or spool goods
- Several spools may be used on a single Wide Span Support Arm

M Wide Span Roll Goods Tube Holder

- For mass display of roll goods, tube holderaccommodates roll-goods tubes of any diameter
- Holder fits over and bolts to center support arms
- Standard finishes: Sahara or Blue Gray

HMRGTH

HMRGTH... Roll Goods Tube Holder



B Wide Span Roll Goods Tube


- 1" (25 mm) OD galvanized tubing for use with Wide Span Roll Goods Display
- Longer tube lengths not recommended for heavy spools, rolls of chain, or large rolls of flooring
- Load capacity: NL 36" or 48"=200 lbs; NL 60"=150; and NL 72" to 93"=100 lbs

WSRGT-(NW)

WSRGT Wide Span Roll Goods Tube NW Nominal Width 36" to 96" in 12" increments

36" to 96" in 12" incremen (914 mm to 2438 mm in 304 mm increments)



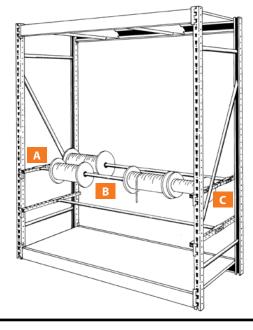

Wide Span Center Support Arm

- Telescoping feature allows crossbar to slip into upright slots on both sides of frame
- Included dart clips lock crossbar in place
- Provides rigid base for Hypermaxi Roll Goods Tube Holder (HMRGTH)
- Standard finishes: Sahara or Blue Gray

WSCSA-(ND)

WSCSA Wide Span Center Support Arm

ND Nominal Depth 18" to 48" in 6" increments (457 mm to 1219 mm in 152 mm increments)





Trailer Coupler & Jack Diplays

- Allows consumers to see how the merchandise will look for their application
- When used on Wide Span, stock can be stored above and below display for self-service shopping







A-Frame Trailer Coupler Angled

A D B


A Trailer Hitch Support Arm

- Use for single trailer tongue
- · Jack can be attached as well
- For each arm, order one Trailer Hitch Bracket (THSB)

THSA(NL)

THSA Trailer Hitch Support Arm

NL Nominal Length 10" to 28" in 2" increments and 40" (254 mm to 711 mm in 51 mm increments and 1016 mm)




B A-Frame Trailer Coupler Angled

- Use for A-frame trailer tongue
- Two required when used with A-frame
- For each arm, order two Trailer Hitch Brackets (THSB)

AFTCA(NL)

AFTCA A-Frame Trailer Hitch Coupler Angled

NL Nominal Length Blank=16" (406 mm) 28=28" (711 mm)



Trailer Hitch Support Bracket

- Bracket saddles rear beam
- Both arms attach to Trailer Hitch Support Bracket (THSB) with a bolt
- For each arm, order one Trailer Hitch
- Brackets (THSB)

THSB

THSB Trailer Hitch Support Bracket



Adjustable Tire Beam

- Use as rear beam for Trailer Hitch Support Arm [THSA(NL)]
- Trailer Hitch Support Bracket (THSB) saddles Adjustable Tire Beam
- Use 3.5 and 1 step beam for this application

Q10871-(NH)(NL)-2

Q10871 Wide Span Tire Display

NH Nominal Beam Height 35=3.5" (89 mm) 50=5" (127 mm)

60=6" (152 mm) NL Nominal Length 36" to 144" and 150" (914 mm to 3658 mm and 3810 mm)


2 Step-2





Suspended Maxi in Wide Span

Designed to merchandise pegged or shelved merchandise in a Wide Span section while keeping the decks beneath clear for display of larger items. May be used in any section height greater than 72" (1829 mm) and with all beam lengths. The system is depth adjustable and accepts Maxi Line accessories. Load capacity is 800 pounds.

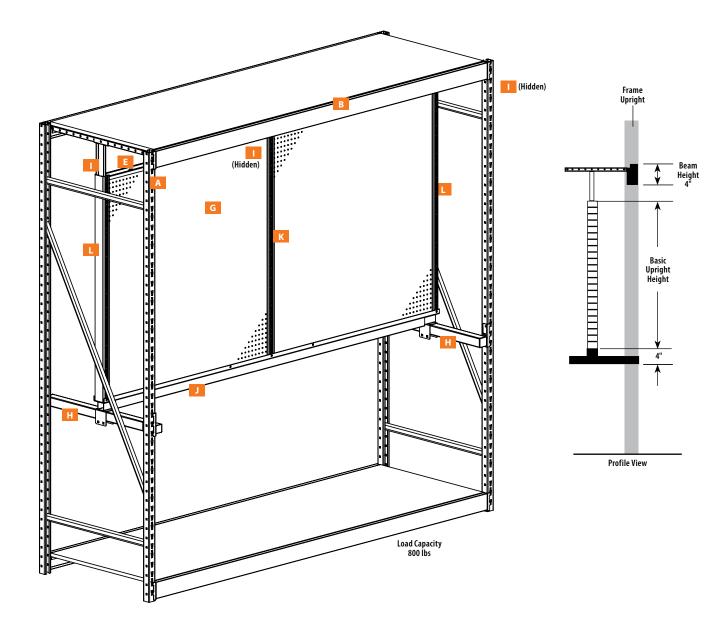


	Description	Part Number	Qty.
Α	Wide Span Frames	(TYPE)WSF(ND)(NH)	As Required
В	Wide Span Beams	(TYPE)WSFB(NL)	2
C*	Wide Span Deck Supports	(TYPE)WSDS(ND)	As Required
D*	Wide Span Decks	Various Decks to choose from	As Required
E	Top Spanner	STL-(NW)	4
F*	Center Spanner	SC-(NW)	2
G	Extension Back Panels, pegboard or hardboard	BX(TYPE)-(NW)(NH)	4
Н	Basic Upright Support, frame depth	PRBUNDS-(ND)	1 Pair
1*	Basic Upright Support Bracket, Modified Omega	WSUSB-(ND)	3
J	Basic Upright Support, beam length	PRBUNWS-(NL)	1
K	Suspended Maxi Basic Upright	PRBU-(NH)	1
L	Suspended Maxi Basic Upright, flush side	PRFSBU-(NH)	2
M*	STL Clip	STLCLIP	1 Pair

NOTE!All parts standard finishes:
Sahara or Blue Gray

*Not shown

Suspended Maxi in Wide Span

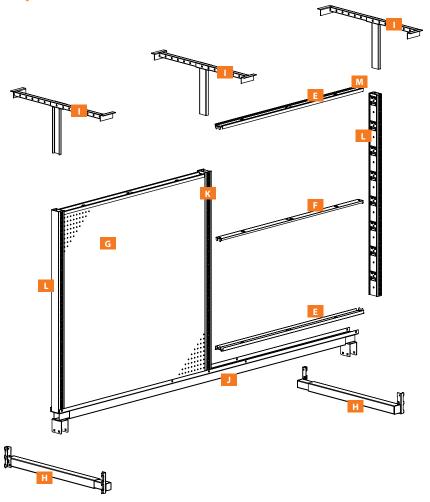

STL-(NW)

STL....Top Spanner

NW....Nominal Width 3' or 4' (914 mm or 1219 mm)

• STL Clips installed with Top Spanners

SC-(NW)

SC....Center Spanner

NW....Nominal Width 3' or 4' (914 mm or 1219 mm)

G BX(TYPE)-(NW)(NH)

BX....Extension Back

TYPE....P=Pegboard, H=Hardboard

NW....Nominal Width 3' or 4' (914 mm or 1219 mm)

NH....Nominal Extension Height 6" to 54" in 6" increments (152 mm to 1372 mm in 15.24 increments)

PRBUNDS-(ND)

PRBUNDS....Pallet Rack Basic Upright Supports

ND....Nominal Depth 36" or 48" (914 mm or 1219 mm)

Pairs

WSUSBO-(ND)

WSUSBO....Wide Span Upright Support Bracket Offset ND....Nominal Depth 24", 30", 36", 42" or 48"

(610 mm, 762 mm, 914 mm, 1067 mm or 1219 mm)

PRBUNWS-(NL)

PRBUNWS....Pallet Rack Basic Upright Supports, Beam Length

> NLNominal Length 48", 72" or 96" (1219 mm, 1829 mm or 2438 mm)

K PRBU-(NH)

PRBUPallet Rack Basic Upright NHNominal Height 24", 30" or 36" (610 mm, 762 mm or 914 mm)

PRFSBU-(NH)

PRFSBU Pallet Rack Basic Upright, Flush Side NH Nominal Height 24", 30" or 36" (610 mm, 762 mm or 914 mm)

M* STLCLIP

STLCLIP....Top Spanner Clip

• One pair secures Top Spanner (STL-(NW)

*Not shown

NOTE!

Order the required number of backs for designated units; order separately Hardboard BXH-(NW)(NH) or Pegboard BXP-(NW)(NH).



Wide Span Gravity Feed Battery Rack

- Deck is sturdy-gauge wire, approximately %6" (8 mm) diameter, on 3" (76 mm) grid centers with integrated steel, support channels
- · Optional super-slip or corrosion-resistant coating
- Decks install in special-height Wide Span Frames, with rear beam 8" (203 mm) higher than front beam for a 12° slope
- · Load capacity is 4000 lbs per section
- · Load capacity is 1000 lbs per beam pair
- Standard finishes: Sahara or Blue Gray

NOTE!

Gravity Feed Beams (HMGFB-60RD) used for battery racks must never exceed 60" in length due to load capacity.

To order as shown in diagram:

RDWSF3668

RDWSFRegular-Duty Wide Span Frame

36Nominal Depth 36" (914 mm)

68 Nominal Height 68" (1727 mm)

HMGFWD-360860

HMGFWD....Gravity Feed Wire Deck

36 Nominal Depth 36" (914 mm)

08....Beam Height Difference 8" (203 mm)

60 Nominal Width 60" (1524 mm)

HMGFB-60RD

HMGFB Gravity Feed Beam

60 Nominal Width 60" (1524 mm)

RD....Regular-Duty

BRRW-36

BRRWBattery Rack Retainer Wire 36Nominal Depth 36" (914 mm)

WSREP-20

WSREPWide Span Retainer Pin 20 20 Pack

WSLS-10


WSLSWide Span Leveling Shim 1010 Pack





NOTE!

Optional Super Slip* Finishes/Codes PC093 = Black, Super Slip PC054 = Black, Acid Resistant PC085 = Silver Vein, Acid Resistant

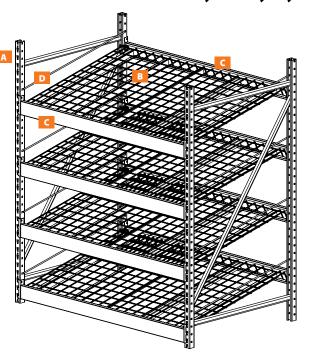



To order as shown in diagram

	Description	Part Number	Qty. per Section	Add-on
Α	Wide Span Regular-Duty Frame	RDWSF3668	2	1
В	Gravity Feed Wire Deck	HMGFWD-360860	4	4
C	Gravity Feed Beam	HMGFB-60RD	8	8
D	Battery Rack Retainer Wire	BRRW-36	8	8
E	Wide Span Retainer Pin, 20 pack	WSREP-20	1	1
F	Wide Span Leveling Shim, 10 pack	WSLS-10	1	1

*Color upcharge for Super Slip and acid-resistant paint finishes range from \$2.85 to \$11.40 depending on the part. Contact your Madix Sales Representative for more details.



Wide Span Dog Food Display

- Reversed Wide Span frames have one upright; rotated special beams may be installed from one side
- No diagonal brace allows decks to be continuous
- Frame depths and deck widths sized to accommodate most sizes of bagged pet food or litter
- · Standard finishes: Sahara or Blue Gray

NOTE!

Do not use Reversed Wide Span Frames for any other purpose due to absence of diagonal brace.

RDWSFDF(ND)(NH)-REV-(OPT)

RDWSF Regular-Duty Wide Span Frame

DF Dog Food

ND Nominal Depth 20", 24", 28", 36", 48" or 60" (508 mm, 610 mm, 711 mm, 914 mm, 1219 or 1524 mm)

NH Nominal Height 24" to 78" in 6" increments (610 mm to 1981 mm in 152 mm increments)


REV Reversed

OPT Blank=No Floor Anchor FA=Floor Anchor



Nominal Depth	Actual Dimension
20"	22 29/32
24"	26 29/32
28"	30 29/32
36"	38 29/32
48"	48 29/32





NOTE: Slots on face of the upright frames are turned in the same direction.

Dog Food Display Front/Rear Beam

· Standard finishes: Sahara or Blue Gray

DFD(TYPE)-(NW)-(OPT)

DFD Dog Food Display

TYPE FB=Front Beam RB=Rear Beam


NW Nominal Deck Width

18", 20", 21", 22" or 27"

(457 mm, 508 mm, 533 mm or 686 mm)

OPT MT=Metal Tag Mold

Blank=No Metal Tag Mold



Dog Food Display Deck

Deck Width	Weight Capacity
18"	225
20"	225
21"	350
22"	350
27"	350

DFDD(NW)(ND)-1PB-U

DFDD Dog Food Display Deck

NW Nominal Deck Width

18", 20", 21", 22" or 27"

(457 mm, 508 mm, 533 mm or 686 mm)


ND Nominal Frame Depth

22", 24", 30" or 36"

(559 mm, 610 mm, 762 mm or 914 mm)


1PB 1" (25mm) Thick Particle Board

U.....Unsealed



Wide Span Bulk Merchandiser

Top platform allows display of large-profile merchandise requiring a strong support system. Boxed merchandise can be stacked on base below the display. Multiple configurations available.

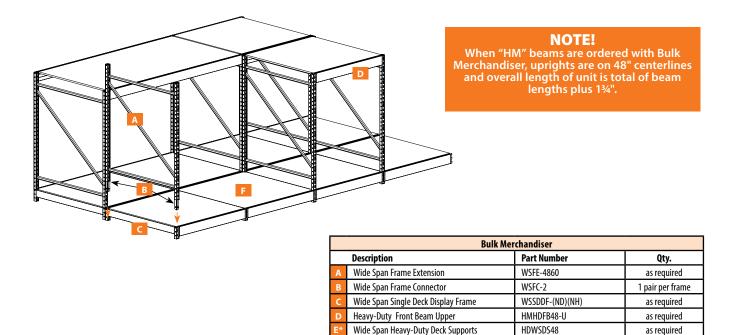

*Not shown here

A Wide Span Frame Extension

- Used for two-level Bulk Merchandiser
- · Allows for reconfiguration in store
- One set of Wide Span Frame Connector (WSFC-2) per Wide Span Frame Extension (WSFE-4860)
- Standard finishes: Sahara or Blue Gray


WSFE-4860

WSFE Wide Span Frame Extension

Wide Span Single Display Deck Frame, Sealed

48 Nominal Width 48" (1219 mm)

60 Nominal Height 60" (1524)

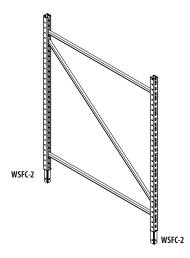

as required

B Wide Span Frame Connector

- Heavy-gauge channel with hardware for connecting any two frames listed to obtain overall heights from 168" to 240" (4267 mm to 6096 mm)
- Packages of two only
- One set per Wide Span Frame Extension (WSFE-4860)
- · Standard finishes: Sahara or Blue Gray

WSFC-2

WSFC Wide Span Frame Connector 2 Pair of 2



WSSDDFD4848-U



Wide Span Single Deck Display Frame

- Two required for Bulk Merchandiser Display starter
- One additional for each added section
- · Standard finishes: Sahara or Blue Gray


WSSDDF-48(NH)(OPT)

WSSDDF.... Wide Span Single Deck Display Frame

48 Nominal Depth 48" (1219 mm)

NH Nominal Height 04=4" (102 mm) 06=6" (152 mm)

OPT Blank=without casters C=Casters



□ Heavy-Duty Front Beam Upper

- Heavy-gauge beam body with integrated connectors fits snugly into Upright slots and maintains deck alignment with basic fixture slotting
- One beam pair is required per deck
- Standard finishes: Sahara or Blue Gray

HMHDFB48-U

- HMHD Heavy-Duty
 - FB Front Beam
 - 48 Nominal Width 48" (1219 mm)
 - U....Upper




Heavy-Duty Wide Span Deck Support

- Formed, steel component easily rotates into place, ties beams together, and supports decks
- Standard finishes: Sahara or Blue Gray

HDWSDS48

HDWSDS.. Heavy-Duty Wide Span Deck Supports

48 Nominal Width 48" (1219 mm)

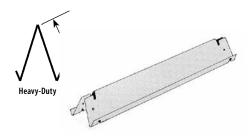

Wide Span Single Deck Display Frame, Sealed

- Durable 5/8" (16 mm) particle board
- Sealed deck with polymer wax finish

WSSDDFD-4848-U


WS Wide Span

SDDFD Single Deck Display Frame

48 Nominal Length 48" (1219 mm)


48 Nominal Depth 48" (1219 mm)

U Unsealed





Wide Span Security Doors

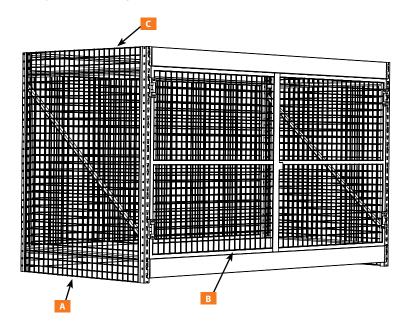

Wide Span Security Doors					
	Description Part Number Qt				
Α	Wide Span Wire Grid End Security Panel	WSWGESP-(ND)(NH)	2		
В	Wide Span Security Doors	WSSD2X2-(NW)(NH)(OPTION)	2		
C	C Wide Span Security Rear Panel WSSRP(NW)(NH)				

A Wide Span Wire Grid End **Security Panel**

- End Security Panels prevent side access to merchandise
- Hardware pack included
- Standard finishes: Sahara or Blue Gray

WSWGESP-(ND)(NH)


WS Wide Span

WGESP Wire Grid End Security Panel

ND Nominal Depth 24", 30", 36" or 42"

(610 mm, 762 mm, 914 mm or 1067 mm)

NH Nominal Height 54", 72", 84" or 96" (1372 mm, 1829 mm, 2134 mm or 2438 mm)




B Wide Span Security Doors

- Secure merchandise by adding Wide Span Security Doors to Wide Span system
- 2" x 2" (51 mm x 51 mm) wire grid
- · Locking device is customer supplied
- Hardware pack includes:
 - º Pack # 7201-136
 - 4 5/16-18 x 11/2 HHMS
 - 6 USS flat washer 5/16" ID, 3/4 OD
 - 4 5/16 lock nut
 - 2 Aviat lock nut 1/4-20
 - 2 PHSMS 1/4-20 x 3/4
 - ° Pack # 7201-162
 - 1 Security hasp w/rotating eye, Zinc coated
 - 2 Security barrel bolt
 - 17 FST/PHPSMS 310 3/4 AB
 - o Pack # 7201-166
 - 4 5/16-18 x 11/2 HHMS
 - 6 USS flat washer 5/16" ID, 3/4 OD
 - 4 5/16 lock nut
 - 2 dart clip .020 spring steel
- · Standard finishes: Sahara or Blue Gray

WSSD2X2L-(NW)(NH)(NSP)

- WS Wide Span
- SD2X2.... Security Doors-2"x2" Grid (51 mm x 51 mm)
 - L.... Locking Hasp
 - NW Nominal Width
 - 38", 42", 48", 66", 72", 78", 90", 92" or 96" (965 mm, 1067 mm, 1219 mm, 1676 mm, 1828 mm, 1981 mm, 2286 mm, 2337 mm or 2438mm)
 - NH Nominal Height
 - 48", 72", 78", 84", 96", 108" or 120" (1219 mm, 1829 mm, 1981 mm,
 - 2134 mm, 2438 mm, 2743 mm or 3048 mm)
 - NSP NSP=No Security Panels



NOTE!

Security Doors include mounting hardware.

Security Doors are mounted between two Regular-Duty beams (additional shelves cannot be installed behind Security Doors).

Use Wide Span Hinge Door Kit (WSHDK) if shelves are needed behind the doors.

Wide Span Security Rear Panel

- Secure merchandise by adding Wide Span Security Doors
- Standard finishes: Sahara or Blue Gray

WSSRP-(NW)(NH)


WS Wide Span

SRP Security Rear Panel

NW Nominal Width 48", 72", 84" or 96"

(1219 mm, 1828 mm, 2134 mm or 2438 mm)

NH Nominal Height 42", 60", 66", 70", 72", 76" or 84" (1067 mm, 1524 mm, 1676 mm, 1778 mm, 1829 mm, 1930 mm or 2134 mm)

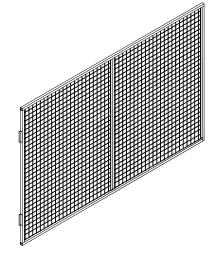

Wide Span Hinged Door Kit

- · Optional panel type:
 - $^{\circ}$ 3" x 3" wire grid (76 mm x 76 mm)
 - ° 1" x 6" wire grid (25 mm x 152 mm)
 - ° Hardboard
- · Available in single or double doors
- Right-hand or left-hand orientation must be indicated when ordering door as a single
- Locking device; customer supplied
- Allows beams to be mounted behind the doors
- Please contact your Madix Sales Representative for other available sizes
- Standard finishes: Sahara or Blue Gray

NOTE!
Hinged Door Kit includes
mounting hardware.

WSHDK-(NW)(NH)-(OPT1)-(OPT2)-(HAND)

WS Wide Span

HDK Hinged Door Kit

NW Nominal Width

48" or 96" (914 mm or 2438 mm)

NH Nominal Height

84" or 96" (2134 mm or 2438 mm)

OPT1 Panel Type

3X2=3" x 3" Wire Grid (76 mm x 76 mm) 1X6=1" x 6" Wire Grid (25mm x 152 mm)


OPT2.... Door Type

S=Single Door

HB=Hardboard

D=Double Door HAND RH=Right-Hand

LH=Left-Hand

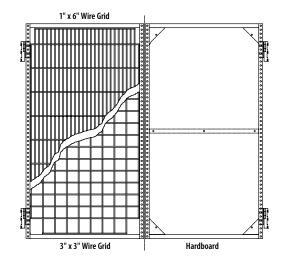

Wide Span Rear Wire Grid Security Panels

- Secures merchandise when used with Wide Span Hinged Door Kit (WSHDK)
- Allows the installation of intermediate beams

WSRWGSP(NW)(NH)

WS Wide Span

RWGSP Rear Wire Grid Security Panels

NW Nominal Width


36" to 96" in 12" increments

(914 mm or 2438 mm in 305 mm increments)

NH Nominal Height

72" to 96" in 12" increments

(1829 mm to 2438 mm in 305 mm increments)

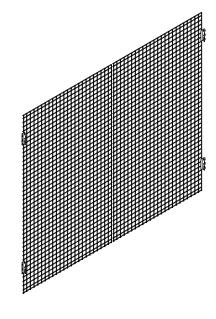



Adjustable Tire Display

- Heavy-gauge, 1¾" (44 mm), square, uprights with welded cross braces are slotted 2" (51 mm) OC for adjustability
- Top beam fits flush to top of frame
- Requires minimum of two levels, four beams per section
- Heavy-gauge beam body with integrated connectors fits snugly into upright slots and maintains deck alignment with base fixture slotting
- One beam pair is required per level
- Image shows two (B) Adjustable Tire Beams and six (C) deck supports per level Regular-Duty Wide Span Frame, Adjustable Tire Beam, and Deck Support are used to complete this Tire Display
- Beams have slots every 3" (76 mm) to adjust for different tire sizes
- Standard finishes: Sahara or Blue Gray


NOTE!

Order depth for Deck Supports is +2" **Example:** Nominal depth of unit is 36", order MPRDS-38-HDG.

Q10871-35(NL)-2

Q10871 Adjustable Tire Display

- 35 Nominal Beam Height 31/2" (89 mm)
- NL Nominal Length 48", 72", 84" or 96" (1219 mm, 1829 mm, 2134 mm or 2438 mm)
- 2 Step-2

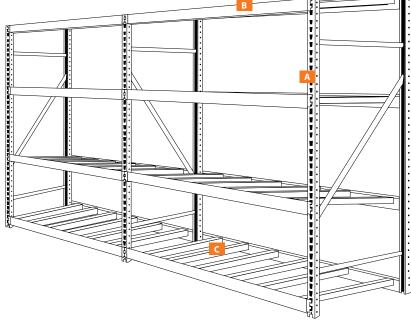

Description		Part Number	Qty.
Α	Regular-Duty Wide Span Frame	RDWSF(ND)(NH)	As Required
В	Adjustable Tire Beam	Q10871-(NH)(NW)-2	As Required
C	Pallet Rack Deck Supports	MPRDS-(ND)-HDG	As Required





Wide Span Gravity Feed System

- Consists of Wide Span Frames, Gravity Feed Channels (below), Gravity Feed Beams, plus other components
- May be stocked from back or front of unit
- Two lower levels show Gravity Feed Channels installed with open face up, on 2½" (64 mm) beams— this position keeps merchandise aligned and is used for canned foods, bottled beverages, petroleum products, and items with similar packaging (transparent front retainers also available)
- Two upper levels show Gravity Feed Channels installed with open face down, on 3½" (89 mm) beams, creating a smooth, slanted surface suitable for boxed or poly-wrapped merchandise
- Finished with Super Slip Paint

 merchandise slideswithout assistance, eliminating costly roller systems or plastic trays which may require replacement or maintenance
- Standard finishes: Sahara or Blue Gray

Description		Part Number	Qty.
Α	Wide Span Gravity Feed Channel	WS(ND)GFC(DROP)(NW)02	As Required
В	Gravity Feed Beam	HMGFB(NW)(TYPE)	As Required

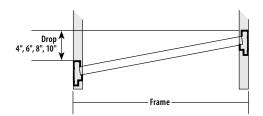

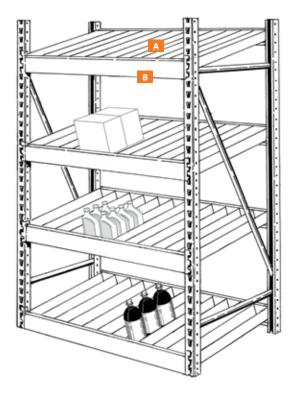

A Wide Span Gravity Feed Channel

- Formed from heavy-gauge steel for rigidity and finished in Super Slip Paint, eliminating need for expensive roller systems
- Use 2½" (64 mm) high beam for merchandising bottles and cans, or inverted in the 3½" (89 mm) high beam to merchandise case goods
- For use on any beam style, light-duty, regular-duty or heavy-duty
- Weight capacity is 60 lbs per channel
- Standard finishes: Sahara or Blue Gray

WS(ND)GFC(DROP)-(NW)02

WS Wide Span

ND Nominal Depth See Chart

GFC Gravity Feed Channel

DROP See Chart

NW Nominal Width

46=41/16", 55=51/2", 65=61/2",


72=71/4" or 76=75/8"

02 2" (51 mm) Height Only

Finish Code-Super Slip Finishes

PC093 Black

PC117 Snow White




ND/Drop	Actual Length
18/04	19.438"
22/04	23.250"
24/04	25.250"
30/04	30.500"
30/06	31.563"
32/06	33.563"
34/06	36.938"
36/06	37.438"
40/06	42.875"
42/08	43.750"
46/08	49.125"
48/08	49.625"
60/10	61.438"

B Wide Span Gravity Feed Beam

- Standard beam body is inverted on brackets to allow the insertion of the Gravity Feed Channels
- One beam pair required per merchandising level with two Wide Span Retainer Pins (WSREP) to secure each beam
- · Standard finishes: Sahara or Blue Gray

HMGFB-48(TYPE)

HMGFB.... Wide Span Gravity Feed Beam 48.... 48" (1219 mm) Length Only TYPE.... LD=Light-Duty (2½" High) HD=Heavy-Duty (3½" High)

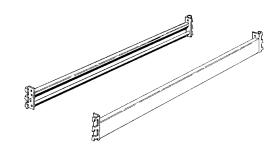

Hypermaxi Regular-Duty Sliding Door Kit Beam




HMRDSDKB(NW)-(OPT)

HMRD Hypermaxi Regular-Duty SDKB Sliding Door Kit Beam NW 36", 48", 72" or 96"

(914 mm, 1219 mm, 1829 mm or 2438 mm)

OPT Blank=No Tag Option PT=Painted Tag Option

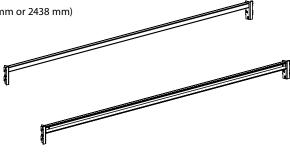

LEDge Light Beam Canopy Cover

- · Canopy installs over existing beams
- End cover is sloped for more aesthetic appeal
- Helps direct BEAM light down towards product

LLBCCPY(CONF)(NW)-(OPT)

LLBCCPYLEDge Light Beam Canopy Cover

CONFConfiguration=Size and Type

Hypermaxi:


LDHM=Light-Duty Hypermaxi RDHM=Regular-Duty Hypermaxi HDHM=Heavy-Duty Hypermaxi


Wide Span:

LDWS-Light-Duty Wide Span RDWS=Regular-Duty Wide Span HDWS=Heavy-Duty Wide Span

NW36", 48", 60", 72", 84" or 96" (914 mm, 1219 mm, 1524 mm, 1829 mm, 2134 mm or 2438 mm)

OPTS=Starter Kit A=Add-on Kit







Wide Span Hypermaxi Sign Holder Modified Shelf Mount

- Signage height: NH -2.313"
- Signage width: NW -½" (1 mm); 1.34" (3 mm) overlap
- Signage thickness: 1/4" maximum
- May also be installed on Maxi Line Gondola


WSHMSHFM(NW)(NH)


WSHM Wide Span Hypermaxi

SHFM Sign Holder Modified Shelf Mount

NW Nominal Width 36", 48", 72", 84", 96" or 108" (914 mm, 1219 mm, 1829 mm, 2134 mm, 2438 mm or 2743 mm)

NH Nominal Height 12", 24", 36" or 48" (305 mm, 610 mm, 914 mm or 1219 mm)

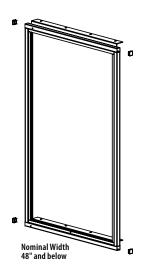

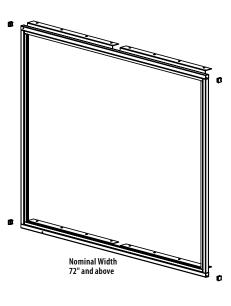


Wide Span Sign Holder Frame

- Unit mounts onto Maxi Line Gondola
- Protudes 2" (51 mm) past nominal depth of shelf, for flush front mounting with cover shelf, order top shelf 2" (51 mm) shorter
- Provides platform for graphics and hides overhead stock
- Nominal Signage Height 21.75" (552 mm)
- Customer provides signage
- May also be installed on Maxi Line Gondola

WS(OPT1)SHF(NW)(NH)(OPT2)

- WS Wide Span
- OPT1 Blank=Wide Span Length HM=Hypermaxi Length
- SHF Sign Holder Frame
- NW Nominal Width 48", 60", 96", 98", 120" or 144" (1219 mm, 1524 mm, 2438 mm, 2489 mm, 3048 mm or 3658 mm)
- NH Nominal Height 36" or 48" (914 mm or 1219 mm)
- OPT2 Mounting Options
 Blank=Beam Mount
 USM=Upper Shelf Mount




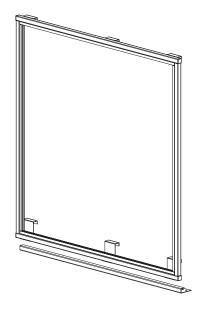





Maxi Rack combines the high load capacity of a traditional racking system with a sleek, flush-front look that is perfect for displaying product on a sales floor. Frames feature a 1" (25 mm) OC slot pattern for maximum adjustability, and a hardware-free assembly ensures rapid installation.

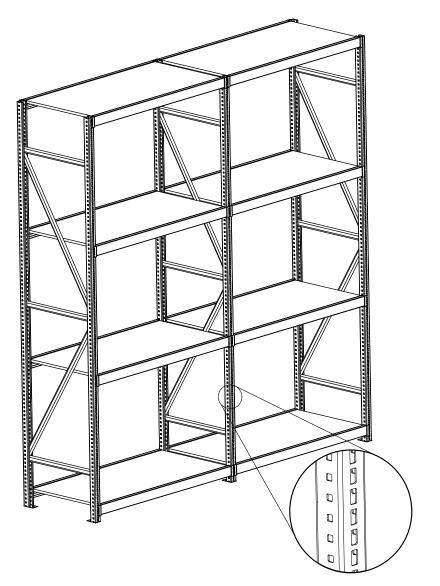


Beam Loading

Maximum Load Capacity per Beam Pair

Beam Length	Light- Duty	Regular- Duty	Number of Supports for Wood Decks	Number of Supports for Wire Decks
48"	1000 #	1600 #	2	2
60"	1000 #	1600 #	3	4
72"	1000 #	1600 #	3	4
84"	1000 #	1600 #	3	4
96"	1000 #	1600 #	3	4

Based on evenly distributed loads and 96" beam length, all frame widths



NOTE!

Cannot be used with standard Maxi Line display shelves or accessories





Maxi Rack Frames

- Heavy-gauge, 1¾" (44 mm), square, upright members with welded cross braces are slotted
- 1" (25 mm) OC for adjustability
- Heavy-Duty Frame has additional bracing to resist accidental stacker impact
- Top beam fits flush to top of frame
- Requires a minimum of two decks and four beams per section

MRF(ND)(NH)-(OPT)


MRF Maxi Rack Frame


ND Nominal Frame Depth 18" to 48" in 6" increments

(457 mm to 1219 mm in 152 mm increments)

NH Nominal Frame Height 48" to 120" in 12" increments (1219 mm to 3048 mm in 305 mm increments)

OPT Blank=as shown FA=Floor Anchor






NOTE!

To preclude overturning, the frame depth x 6 cannot exceed height of topmost loaded beam pair, unless all the frames are properly anchored or braced externally.




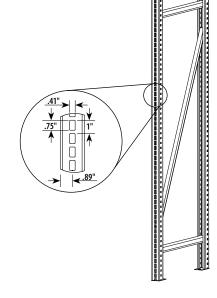

Nominal Depth + 2"

Maxi Rack Beam

- · Heavy gauge beam body with integral connectors fits snugly into 1" OC (25 mm) slots and maintains deck alignment with basic fixture slotting
- One beam pair required per deck
- Maxi Rack Decks ordered separately



Regular-Duty Maximum Capacity 1600 lbs per pair

Light-Duty Maximum Capacity 1000 lbs per pair*

*Based on evenly distributed loads, 96" beam lengths, all frame lengths

MRFB(OPT1)-(NL)

MRFB Maxi Rack Beam

OPT1 LD=Light-Duty RD=Regular-Duty

> NL Nominal Length 24" to 96" in 6" increments (610 mm to 2438 mm in 152 mm increments)

Configurable Options FIN1-TAG-FIN2


FIN1 Beam Finish

TAG Tag Mold Option Blank=No Tag

DGA2P=Powder Coat Finish - Different from Shelf DGA2A=Silver Finish

FIN2 Optional Tag Finish





Maxi Rack Top Cap

- Clear plastic cap inserts into top of upright
- · Allows beam to be mounted in top slot of upright

WSTC-1-CL

WSTC Maxi Rack Top Cap PACK 1=1 Pack

CL.... Clear Plastic





Maxi Rack Dart Clip

- Spring steel clip secures beam to frame, preventing accidental disengagement
- Two required per beam

WSDC25-50

WSDC Maxi Rack Dart Clip

25 Thickness .250" (6 mm)

50 50 = 50 Pack



Maxi Rack Deck Support

 Formed steel component easily rotates into place, ties beams together, and supports deck

(TYPE)WSDS(ND)


TYPE LD=Light-Duty RD=Regular-Duty

WSDS Maxi Rack Deck Support

ND Nominal Depth 18" to 48" in 6" increments (457 mm to 1219 mm in 152 mm increments)







Maxi Rack Deck

 Regular-Duty Decks are durable %" (16 mm) particle board

WSHMDRD(ND)(NL)-U

WSHM Maxi Rack Deck

RD Regular-Duty

ND Nominal Depth

18" to 48" in 6" increments

(457 mm to 1219 mm in 152 mm increments)

NL Nominal Length

24" to 96" in 6" increments

(610 mm to 2438 mm in 152 mm increments)

U Unsealed





Maxi Rack Wire Deck

- Wire Grid Decks are pieced for ease of handling
- Sturdy wire, 5%" (8 mm) gauge in diameter, is welded on 1" x 6" (25 mm x 152 mm) grid centers
- Deck Supports are NOT included; order per chart

WSHMWD-(NL)(ND)1/2X6

WSHM Maxi Rack

WD Wire Deck

NL Nominal Length

48" or 96" (1219 mm or 2438 mm)


ND Nominal Frame Depth


16", 20", 22" or 24" (406 mm, 508 mm, 559 mm or 610 mm)

1/2X65"x 6" Grid (13x 152 mm)



Deck Supports per Beam Length		
Beam Length	Supports	
48" to 54"	2	
84" to 96"	4	





Maxi Rack Gravity Feed System

- Deck is sturdy-gauge wire, approximately 5/6" (8 mm) diameter, on 3" (76 mm) grid centers with integrated steel, support channels
- Optional super-slip or corrosion-resistant coating
- Decks install in special Maxi Rack Gravity feed beams with rear beam higher thans front beam to create a slope, feeding the product forward

To order as shown in diagram

Description		Part Number	Qty. per Section	Add-on
Α	Maxi Rack Frames with Floor Anchor	MRF2060FA	2	1
В	Maxi Rack Gravity Feed Wire Deck Light-Duty	HMGFWDLD200248	4	4
C	Maxi Rack Gravity Feed Beam, Light-Duty	MRGFB48-LD	8	8
D	Maxi Rack Gravity Feed Retainer Wire	BRRW-20	8	8

^{*}Color upcharge for Super Slip and acid-resistant paint finishes range from \$2.85 to \$11.40 depending on the part. Contact your Madix Sales Representative for more details.

A Maxi Rack Frame

- Heavy-gauge, 13/4" (44 mm), square, uprightmembers with welded cross braces are slotted
- 1" (25 mm) OC for adjustability
- Heavy-Duty Frame has additional bracing to resist accidental stacker impact
- Top beam fits flush to top of frame
- Requires a minimum of two decks and four beams per section

MRF2060FA

MRFMaxi Rack Frame 20Nominal Depth 20" (508 mm) 60Nominal Height 60" (1524 mm)

50Nominal Height 60 (1524 mr

FAFloor Anchor

Maxi Rack Gravity Feed Wire Deck

- Gravity feed wire deck is designed to engage with front and back beams at an angle, feeding product forward
- Built in deck supports

HMGFWDLD-200248

HMGFWD....Maxi Rack Gravity Feed Wire Deck

LD....Light-Duty

20Nominal Depth 20" (559 mm)

02Beam Height Difference 2" (25 mm)

48 Nominal Width 48" (1219 mm)




Maxi Rack Gravity Feed Beam, Light-Duty

• Gravity Feed Beams engage into front and rear slots on Maxi Rack Frames

MRGFB48-LD

MRGFBMaxi Rack Gravity Feed Beam 48Nominal Width 48" (1219 mm)


LDLight-Duty

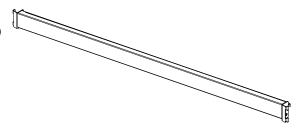

■ Maxi Rack Gravity Feed Retainer Wire

BRRW-20

BRRWMaxi Rack Gravity Feed Retainer Wire 20Nominal Depth 20" (508 mm)




Optional Accessories -

Maxi Rack Side Product Retainer

- Installs into the square inside slotting of Maxi Rack Frames [MRF(ND)(NH)-(OPT)], allowing unobtrusive retention of product
- Can be used with both wire or standard decks
- Tool free install

WSSPR(ND)

WSSPRMaxi Rack Product Retainer
NDNominal Depth 18", 20", 22", 24" or 30"
(457 mm, 508 mm, 584 mm, 610 mm or 762 mm)




Maxi Rack Header

- Installs into the square inside slotting of Maxi Rack Frames [MRF(ND)(NH)-(OPT)], allowing unobtrusive retention of product
- Can be used with both wire or standard decks
- Tool free install

BRIH(NW)

BRIH Maxi Rack Header

NW Nominal Width 36", 40", 48", 52", 60", 71", 79" or 92" (914 mm, 1016 mm, 1219 mm, 1321 mm, 1524 mm, 1803 mm, 2007 mm or 2337 mm)




Maxi Rack Back-to-Back Connector

- Heavy-gauge-steel straps maintain 2" (51 mm) spacing between frames to allow repositioning of rear beams
- Hardware included for securing straps to frames
- Six connectors required for any height or combination of height frames
- Floor Anchor might interfere with pallets and pallet jacks if no lower beam is used
- Galvanized finish only

WSBBC-2-24

WSBBC-2.... Maxi Rack Back-to-Back Connectors 24.... 24 Pack



Maxi Rack Rear Product Retainer


- Retains product at rear of shelf to prevent items from falling backward
- Tool free install

HMWMSRPR48

HMWM Maxi Rack

SRPR Shelf Rear Product Retainer


48 Nominal Depth 48" (1219 mm)




Maxispan

Maxispan shelving is the most effective use of floor space for above-display storage. It completely spans continuous gondola runs when Hypermaxi's height precludes its use, and yet it still gives you the load capacity of our Pallet Rack system. High load capacity and space saving efficiency in a single highly customizable solution.


- · Maxispan must be anchored to floor
- Each frame requires 4 anchors
- Maxispan column load capacity is 11,000 lbs. Use this figure in the column loading chart to determine the beam loading per section, or consult your Madix representative for specific capacities for your application
- Spacing over 98" (1219 mm) vertically reduces column load capacity due to lack of support to channel
- When lowest beam is 48" (1219 mm) or higher from floor, always secure frame to floor

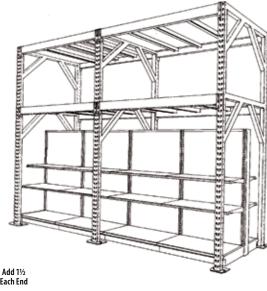

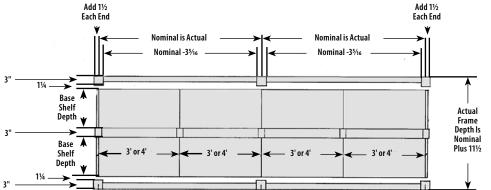


NOTE!

Column load capacity is 11,000 lbs when the bottom of the first beam in no more than 98" (2489 mm) from the floor.

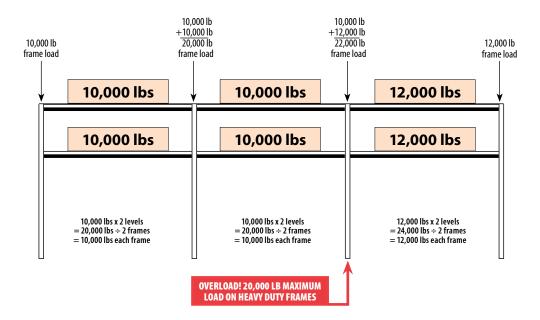

Maxispan Upright


- Maxispan Uprights heights 84" to 144" (2134 mm to 3658 mm) fit over Gondolas Base Shelves 18" to 30" (457 mm to 762 mm) in depth
- · Maxispan column load capacity is 20,000 lbs
- · Standard finishes: Sahara or Blue Gray

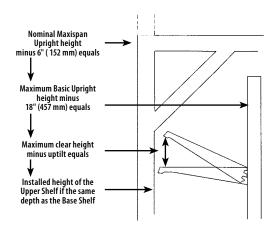


MS2U(NH)-(ND)

- MS2 Maxispan 2" OC (51 mm)
 - U....Upright
- NH.... Nominal Frame Height 84" to 144" in 6" increments (2134 mm to 3658 mm in 152 mm increments)
- ND Nominal Frame Depth 36", 40", 44", 48", or 60" (914 mm, 1016 mm, 1118 mm, 1219 mm, or 1524 mm)

Nominal Frame Length	For Gondola Base Shelves	Actual Frame Depth
36"	18" x 18"	47½" (1207 mm)
40"	20" x 20"	51½" (1308 mm)
44"	22" x 22"	55½" (1410 mm)
48"	24" x 24"	59½" (1511 mm)
60"	30" x 30"	71½" (1816 mm)





Maximum clear height minus uptilt equals figure in chart below

Shelf Depth	18"	20"	22"	24"	26"	28"	30"
Uptilt Clearance	6"	7"	8"	8"	9"	9"	10"

NOTE!

To preclude overturning, frame depth x 6 cannot exceed height of topmost loaded beam pair, unless all frames are properly anchored or braced externally.


Maxispan Beam

- · Available in three heights for differing load capacities
- Sized to place Uprights on 3', 4', 6', 7' or 8' (914 mm, 1219 mm, 1829 mm, 2134 mm or 2438 mm) center lines
- Standard finish: Sahara or Blue Gray

MS2B(NH)(NL)-2

- MS2 Maxispan 2" OC (51 mm)
 - B.... Beam
- NH Nominal Beam Height 31/2", 5" or 6" (89 mm, 127 mm or 152 mm)
- NL Nominal Beam Length 36", 48", 72", 84" or 96" (914 mm, 1219 mm, 1829 mm, 2134 mm or 2436 mm)
 - 2 2=15/8" (41 mm)

Beam Length	Beam Height	Maximum Capacity per Beam Pair
	3½"	4,950 lbs
36"	5"	7,600 lbs
	6"	10,000 lbs
	3½"	4,950 lbs
48"	5"	7,600 lbs
	6"	10,000 lbs
	3½"	4,950 lbs
72"	5"	7,600 lbs
	6"	10,000 lbs
	3½"	4,950 lbs
84"	5"	7,600 lbs
	6"	10,000 lbs
	3½"	4,950 lbs
96"	5"	7,600 lbs
	6"	10,000 lbs



Maxispan Deck Support


- For 5/8" (16 mm) deck
- Formed, heavy-gauge steel with tabs fits into beam slots, providing support for regularduty decking or, in heavy-duty applications, to tie beams together to prevent rotation
- Order by frame depth, in quantities shown
- Standard finishes: Sahara or Blue Gray

DSRMS-(ND)-1

DSRMS Deck Support for Maxi Span

ND Nominal Depth 24" to 48" in 6" increments (610 mm to 1219 mm in 152 mm increments)

Deck Supports per Beam Length			
Deck Type	Nominal Beam Length	Required Supports	
Particle Board	36" to 72"	2	
	84" to 108"	4	
Wire Grid & Flow Through	36" to 48"	2	
	60" to 96"	4	





Maxispan Deck Support


- Formed, heavy-gauge steel with tabs fits into beam slots
- · Supports regular-duty decking
- Ties heavy-duty decking beams together to prevent rotation
- Order by frame depth, in quantities shown in table
- Standard finish: Sahara or Blue Gray

MMSDS-(ND)

MMS Maxispan 2" OC (51 mm)

DS Deck Support

ND Nominal Frame Depth 36", 40", 44", 48" or 60" (914 mm, 1016 mm, 1118 mm, 1219 mm or 1524 mm)



Deck Supports per Beam Length				
Deck Type Nominal Beam Length Required Support				
Heavy-Duty	36" to 96"	2		

Maxispan Base Deck Beam


- Resists damage from carts and floor polishers
- Used at floor level to form kickplate
- Prevents trash from collecting under bottom deck
- Standard finishes: Sahara or Blue Gray

MS2BDB-(NL)

MS2 Maxispan

BDB Base Deck Beam

NL Nominal Length 36" to 96" in 12" increments (914 mm to 2438 mm in 305 mm increments)



Pallet Rack Pallet Stop

- Heavy-gauge angle aids in pallet positioning
- Easily attaches to decking or beam with supplied hardware
- Standard finishes: Sahara or Blue Gray

PRPS-(NL)

PRPS Pallet Rack Pallet Stop

NL Nominal Length 36" to 96" in 12" increments (914 mm to 2438 mm in 305 mm increments)



Maxispan Heavy-Duty Decking

- Unfinished 2" (51 mm) dimensional lumber provides high load capacity
- Use with 2" (51 mm) style beams only
- · Order by upright depth
- Use with Maxispan Deck Supports [MMSDS-(ND)]

MMSHDD-(ND)

MMS Maxispan

HDD Heavy-Duty Deck

ND Nominal Frame Depth 36", 40" or 44", 48", or 60" (914 mm, 1016 mm, 1118 mm, 1219 mm or 1524 mm)



NOTE!Deck Supports are *NOT* included!

Deck Supports per Beam Length			
Nominal Beam Length	Required Supports		
36" to 96"	2		

Nominal Frame Depth	Actual Length
36"	445%"
40"	48%"
44"	52%"
48"	56%"
60"	68%"

Maxispan Waterfall Wire Grid Deck

- Sturdy-gauge wire, 5/16" (8 mm) in diameter, is welded on 3" (76 mm) grid centers to form decking
- Integrated supports eliminate standard deck supports
- Standard finishes: Silver Vein, Sahara, or Blue Gray

MSWFWGD(ND)(NL)-3

MS Maxispan


WF Waterfall

WGD Wire Grid Deck ND Nominal Frame Depth 36", 40", 48", 56" or 60" (914 mm, 1016 mm, 1219 mm, 1422 mm or 1524 mm)

NL Nominal Piece Length 24" to 48" in 6" increments (610 mm to 1219 mm in 152 mm increments)

3 Grid Size 3" OC (76 mm)

Nominal Beam Length	Combine these Piece Lengths to equal beam length	
36"	36"	
48"	48"	
60"	30" + 30"	
72"	36" + 36"	
84"	42" + 42"	
96"	48" + 48"	

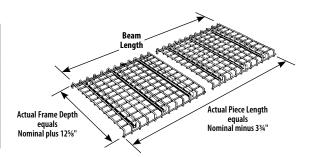

Maxispan Wire Grid Deck

- Sturdy-gauge wire, 5/16" (8 mm) in diameter, is welded on 3" (76 mm) grid centers to form decking
- Wire-grid piece length runs parallel to beam length
- Standard finishes: Silver Vein, Sahara or Blue Gray
- Order deck supports separately
- Use Maxispan Deck Support [DSRMS-(ND)-1] only

MSWMS(ND)(NL)-3

MS Maxispan


WMS Wire Grid Deck

ND Nominal Frame Depth 36", 40", 44", 48" or 60" (914 mm, 1016 mm, 1118 mm, 1219 mm or 1524 mm)

NL Nominal Piece Length 24" to 48" in 6" increments (610 mm to 1219 mm in 152 mm increments)

3 Grid Size 3" OC (76 mm)


Deck Type	Nominal Beam Length	Combine these Piece Lengths to equal beam length	Quantity of Deck Supports
One Piece	36"	36"	2
Decks	48"	48"	2
	60"	30" + 30"	4
Two Piece	72"	36" + 36"	4
Decks	84"	42" + 42"	4
	96"	48" + 48"	4

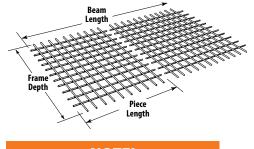



NOTE!Deck Supports are NOT included!

Omega Merchandising System


Omega Merchandising System is best utilized as a complementary addition to our Pallet Rack system. The Omega Merchandising System adds functionality and efficiency, as an innovative solution in mass merchandising operations.

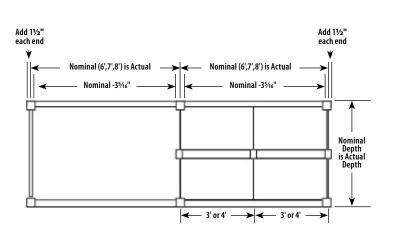

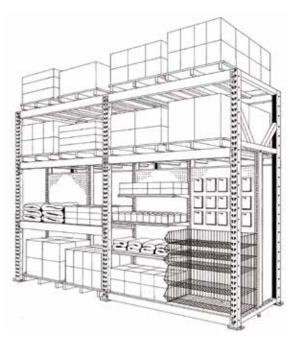

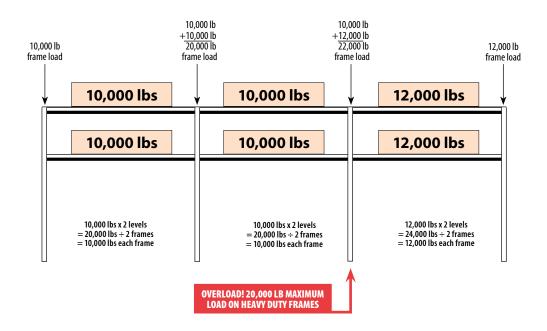

Omega Merchandising System

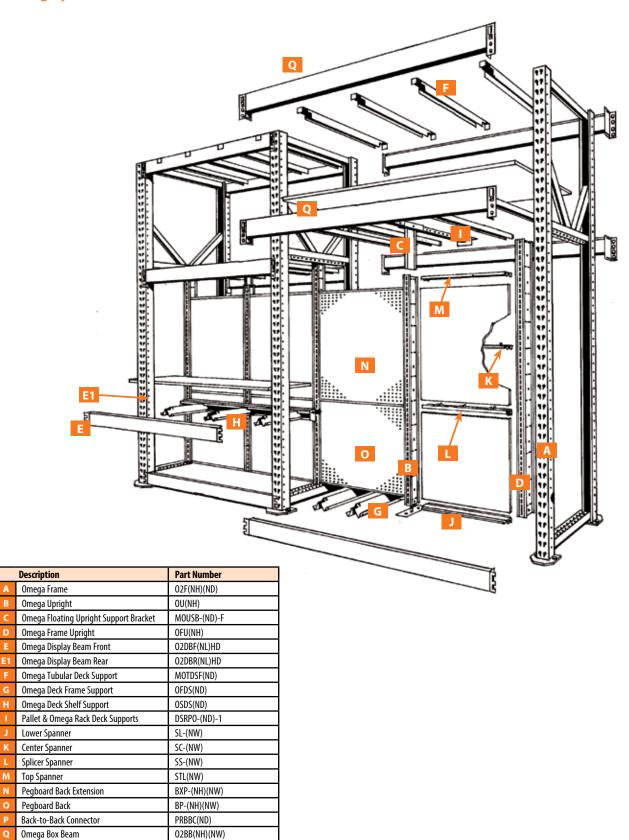

- Omega

Heavy-Duty Systems

A Omega Frame

- Slotted for beam adjustment in 2" (51 mm) increments
- Welded construction
- Upper and Lower channels accept Omega Upright with 1" (25 mm) adjustments
- Heavy-duty diagonals and footplates

NOTE!


To preclude overturning, frame depth x 6 cannot exceed height of topmost loaded beam pair, unless all frames are properly anchored or braced externally.

O2F(NH)(ND)

O2F Omega Frame

NH Nominal Height 96" to 144" in 24" increments (2438 mm to 3658 mm in 610 mm increments)

ND Nominal Depth 36" to 48" in 6" increments (914 mm to 1,219 mm in 152 mm increments)





B Omega Upright

- Supports backs, spanners, and standard shelving and accessories
- Must be used with Omega Upright Support Bracket
- · Must be anchored to the floor

OU(NH)

OU Omega Upright

NH Nominal Height 78" to 90" in 6" increments (1981 mm to 2286 mm in 152 mm increments)



Omega Floating Upright Support Bracket

- Supports backs, spanners, and standard shelving and accessories
- Must be used with Omega Upright

MOUSBO-(ND)-F

MOUSB Omega Upright Support Bracket Offset mot

ND Nominal Depth 36" to 48" in 6" increments (914 mm to 1219 mm in 152 mm increments)

F Floating




D Omega Frame Upright

• Use with Omega Frame when standard shelving, backs, or accessories are used

OFU(NH)

OFU Omega Frame Upright

NH Nominal Height 78" to 90" in 6" increments (1981 mm to 2286mm in 152 mm increments)



E E Omega Display Beam

- Uses Omega Deck Supports
- Accepts Wire Grid Decks or particle board decks

Beam Length x Beam Height	Maximum Capacity per Beam Pair
36" x 5"	3,000 lbs
48" x 5"	3,000 lbs
72" x 5"	3,000 lbs
84" x 5"	3,000 lbs
96" x 5"	3,000 lbs
106" x 5"	2,500 lbs

O2DB(OPT)(NL)HD

O2DB Omega Display Beam 2" OC (51 mm)

OPT....F=Front

NL Nominal Length 0447=4' (1219 mm) 0687=6' (1829 mm)

0807=0 (1025 mm) 0807=7' (2134 mm)

0927=8' (2438 mm)

1047=9' (2743 mm)

HD Heavy-Duty





E Omega Tubular Deck Support

- Load-bearing pallet support
- Fits flush with top of beam
- Rests on top of beam step
- One pair required per pallet to be used
- Load capacity is 5,000 lbs per pair

MOTDSF(ND)

MOTDS Omega Tubular Deck Support

F Flush

ND Nominal Depth 36", 42" or 48" (914 mm, 1066 mm or 1219 mm)



Omega Deck Frame Support

• To be used with full-frame depth decks and two front-display beams only

Deck Supports per Beam Length				
Deck Type Nominal Beam Length		Required Supports		
	36" to 48"	2		
Particle Board	60" to 96"	3		
	108"	4		
	36" to 48"	2		
Wire Grid & Flow Through	60" to 96"	4		
	108"	6		

OFDS(ND)

OFDS Omega Deck Frame Support

ND Nominal Depth 36" to 48" in 6" increments (914 mm to 1066 mm in 152 mm increments)



H Omega Deck Shelf Support

- Use only with Omega Deck Shelf
- Use only with a front and rear-display beam

Deck Supports per Beam Length				
Deck Type Nominal Beam Length		Required Supports		
	36" to 48"	2		
Particle Board	60" to 96"	3		
	108"	4		
	36" to 48"	2		
Wire Grid & Flow Through	60" to 96"	4		
	108"	6		

OSDS(ND)

OSDS Omega Deck Shelf Supports

ND Nominal Depth 18" to 34" in 2" increments (457 mm to 864 mm in 51 mm increments)



■ Pallet & Omega Rack **Deck Supports**


- For 5/8" (16 mm) deck
- Formed, heavy-gauge steel with tabs fits into beam slots, providing support for regularduty decking or, in heavy-duty applications, to tie beams together to prevent rotation
- Order by frame depth, in quantities shown in table
- · Standard finishes: Sahara or Blue Gray

DSRPO-(ND)-1

DSRPO Pallet Rack Deck Supports

ND Nominal Depth 24" to 48" in 6" increments (610 mm to 1219 mm in 152 mm increments)

Deck Supports per Beam Length			
Deck Type	Nominal Beam Length	Required Supports	
Dambiela Daawel	36" to 72"	2	
Particle Board	84" to 108"	4	
	36" to 48"	2	
Wire Grid & Flow Through	60" to 96"	4	
	108"	6	




Lower Spanner

- · Snap-in spanner secures uprights at equal spacing and supports back panels
- · Electrical knockouts

SL-(NW)

SL Lower Spanner

NW Nominal Width 3' or 4' (914 mm or 1219 mm)

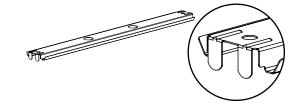


K Center Spanner

- Galvanized snap-in spanner assures back panel rigidity
- Electrical and Telescoping Upright knockouts
- Galvanized only

SC-(NW)

SC Center Spanner

NW Nominal Width 3' or 4' (914 mm or 1219 mm)

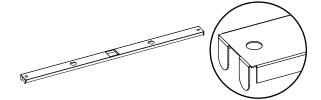



Splicer Spanner

- Splicer spanner joins two back panels in sections 78" (1981 mm) and above
- Electrical and Telescoping Upright knockouts

SS-(NW)

SS Splicer Spanner



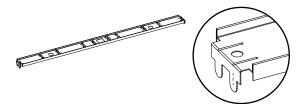


Top Spanner

- "Snap-in" spanner secures uprights at equal spacing; traps back panels and trims top of section
- Electrical and Telescoping Upright knockouts

STL-(NW)

STL Top Spanner

NW Nominal Width 3' or 4' (914 mm or 1219 mm)

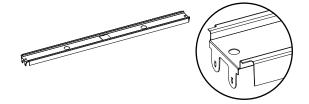

Pegboard Back Extension


BXP-(NW)(NH)

BX Extension Back

P.... Pegboard

NW Nominal Width 3' or 4' (914 mm or 1219 mm)

NH Nominal Height 6" to 54" in 6" increments (152 mm to 1372 mm in 152 mm increments)

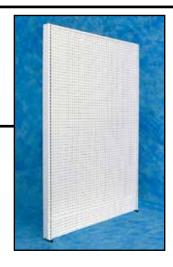

Pegboard Back

• Back nominal height (NH) should match Basic Upright height

BP-(NW)(NH)

B.... Back

P.... Pegboard

NW Nominal Width 3' or 4' (914 mm or 1219 mm)

NH Nominal Height 36" to 72" in 6" increments (914 mm to 1829 mm in 152 mm increments)




- Heavy-gauge connector keeps back-to-back runs properly spaced
- Use two connectors on frames up to 96" (2438 mm) high; three on taller units
- Hardware included
- · Standard finishes: Sahara or Blue Gray

PRBBC(ND)

PR Pallet Rack

BBC Back-to-Back Connector

ND Nominal Back Spacing 6" to 12" in 1" increments (152 mm to 305 mm in 25 mm increments)



Omega Box Beam

- · Can accommodate particle board, Wire Grid Deck, or 2" (51 mm) dimensional board decking
- Use only with Omega Tie Bars and Omega Deck Top

Beam Length x Beam Height	Maximum Capacity per Beam Pair
36" x 5"	7,600 lbs
48" x 5"	7,600 lbs
72" x 5"	7,600 lbs
84" x 5"	7,600 lbs
96" x 5"	7,600 lbs
106" x 5"	6,150 lbs

O2BB(NH)(NW)


O2BB Omega Box Beam

NH.... Nominal Height 50" (1270 mm)

NW.... Nominal Width 36" to 108" in 12" and 24" increments (1981 mm to 2743 mm in 305 mm and 610 mm increments)





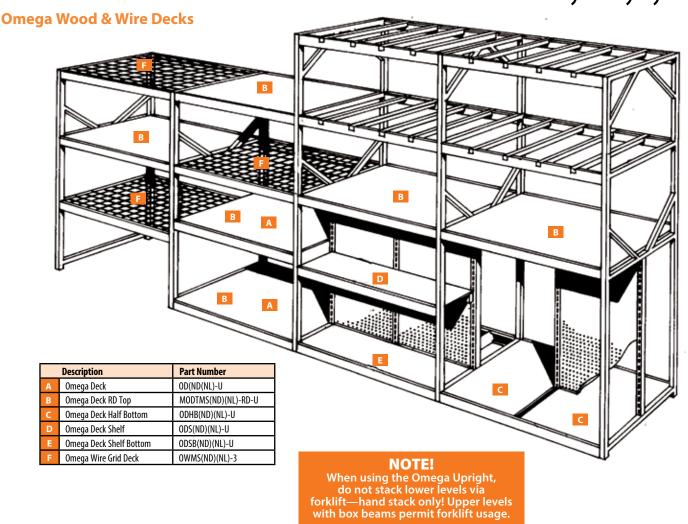

A Omega Frame Deck

- Use as a full-frame-depth deck at the bottom or intermediate level
- Uses Omega Deck Frame Support [OFDS(ND)]
- Cannot be used in sections where backs are used

Deck Supports per Beam Length		
Beam Length	Supports	
36" or 48"	2	
72", 84", or 96"	3	
108"	4	

OD(ND)(NL)-U

- OD Omega Deck
- ND.... Nominal Frame Depth 34", 40" or 46" (914 mm, 1016 mm or 1168 mm)
- NL Nominal Beam Length 36", 48", 72", 84", 96" or 108" (914 mm, 1219 mm, or 1829 mm, 2438 mm or 2743 mm
- U.... Unsealed



NOTE!

Deck Supports are NOT included! Order Omega Deck Support [OFDS-(ND)]

B Omega Deck Regular-Duty Top

- Full-frame-width deck for use only with Omega Box Beams and Tie Bars
- Industrial-grade 5/8" particle board
- Uses Pallet and Omega Deck Rack Support [DSRPO-(ND)-1]

Deck Supports per Beam Length		
Beam Length	Supports	
36", 48" or 72"	2	
84", 96" or 108"	4	

MODTMS(ND)(NL)-RD-U

MODTMSOmega Deck Top

ND.....Nominal Frame Depth 34", 40" or 46" (914 mm, 1016 mm or 1168 mm)

NL Nominal Beam Length 36", 48", 72", 84", 96" or 108" (914 mm, 1219 mm, 1829 mm, 2438 mm or 2743 mm)

RD.....Regular-Duty

U.....Unsealed



NOTE!

Deck Supports are NOT included! Order Pallet & Omega Rack Deck Supports [DSRPO-(ND)-1].



Omega Deck Half Bottom

- Full-frame-depth deck on two Omega Front Beams and the OFDS(ND)-HD Deck Support
- Fits between the Omega Frame Upright and the Omega Upright
- Use with or without back panels
- Uses Omega Deck Frame Support [OFDS(ND)]

Deck Supports per Beam Length		
Beam Length	Supports	
36" or 48"	2	
72", 84", or 96"	3	
108"	4	


ODHB(ND)(NL)-U

ODHB Omega Deck Half Bottom

ND Nominal Frame Depth 34", 40" or 46" (914 mm, 1016 mm, or 1168 mm)

NL Nominal Beam Length 36" or 48" (914m or 1219 mm)

U.... Unsealed



NOTE!

Deck Supports are NOT included! Order Omega Deck Support [OFDS(ND)].

Omega Deck Shelf

Partial-frame-depth deck fits one Omega Beam Front Display and one Omega Beam

- Rear Display plus Omega Shelf Deck Support
- · Only use at intermediate levels
- Fits between Aisle Display Beam, Omega Upright, and back panel
- Uses Omega Deck Frame Support [OFDS(ND)]

Deck Supports per Beam Length		
Beam Length	Supports	
36" or 48"	2	
72", 84", or 96"	3	
108"	4	

ODS(ND)(NL)-U

OD Omega Deck Shelf

S....Shelf

ND Nominal Frame Depth 18" to 34" in 2" increments (457 mm to 864 mm in 51 mm increments)

NL Nominal Beam Length

U.... Unsealed



NOTE!

Deck Supports are NOT included! Order Omega Deck Support [OSDS(ND)].

E Omega Deck Shelf Bottom

- Partial-frame-depth Deck
- Use with two Omega Front Beams and Omega Deck Frame Support
- Fits between Aisle Display Beam, Omega Uprights, and back panel
- Uses Omega Deck Frame Support [OFDS(ND)]

Deck Supports per Beam Length		
Beam Length	Supports	
36" or 48"	2	
72", 84", or 96"	3	
108"	4	

ODSB(ND)(NL)-U

- OD Omega Deck
- SB.... Shelf Bottom
- ND Nominal Frame Depth 18" to 34" in 2" increments (457mm to 864 mm in 51 mm increments)
- NL Nominal Beam Length 36" or 48" (914m or 1219 mm)
- U Unsealed



NOTE!

Deck Supports are NOT included! Order Omega Deck Support [OFDS(ND)].


F Omega Wire Grid Decks

- Pieced for ease of handling
- 5/16" (8 mm) sturdy-gauge wire welded on 3" (76 mm) grid centers
- Standard finishes: Silver Vein, Sahara or Blue Gray
- Order deck supports separately Both 72" (1829 mm) and 108" (2743 mm) decks come as four pieces
- Uses Pallet and Omega Deck Rack Support [DSRPO-(ND)-1]

Deck Supports per Beam Length		
Beam Length Supp		
36" or 48"	2	
60", 72" or 96"	4	
108"	6	

OWMS(ND)(NL)-3

- O....Omega
- WMS Wire Grid Deck
 - ND Nominal Frame Depth 36", 42" or 48" (914 mm, 1067 mm or 1219 mm)
 - NL.... Nominal Piece Length 24", 36", 48", 60", 72", 96" or 108" (610 mm, 914 mm, 1220 mm, 508 mm,1829 mm, 2438 mm or 2743 mm)
 - 3 Grid Size 3" OC (76 mm)




NOTE!

Deck Supports are NOT included! Order Pallet Rack Deck Support [DSRPO-(ND)-1].



Omega Molding Rack

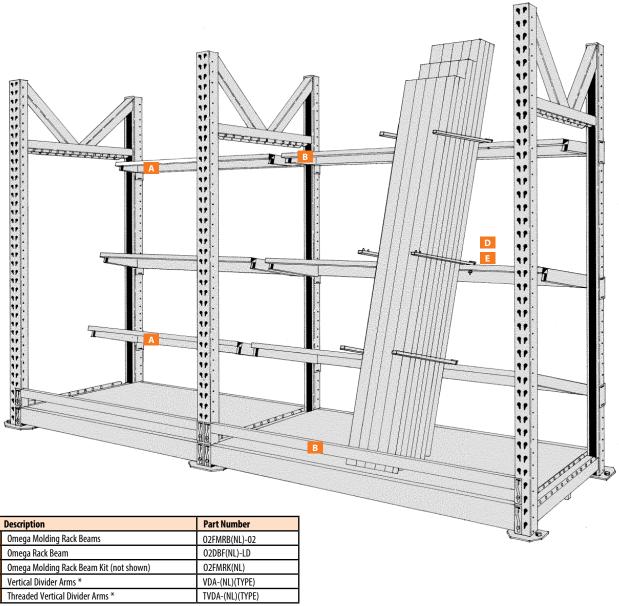

^{*}Choose divider arm type based on merchandising needs

A Omega Molding Rack Beams

• Standoffs are predetermined for optimum product angle

O2FMRB(NL)-(OPT)

O2 Omega 2" OC (51 mm)

FMRB Molding Rack Beams

NL Nominal Width

0327=36" (914 mm)

0447=48" (1219 mm) 0687=72" (1829 mm)

0807=72 (1829 mm) 0807=84" (2134 mm)

0927=96" (2438 mm)


1047=108"(2743mm)

OPT Standoff

02 = 2" (51 mm)

08 = 8" (203 mm)

14 = 14" (356 mm)

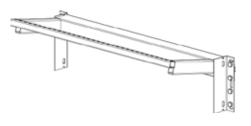



B Omega Retainer Beam

- Install into the Omega uprights
- Helps prevent merchandise from falling off shelf

O2DBF(NL)-LD

O2 Omega 2" OC (51 mm)

DBF Retainer Beam

NL Nominal Beam Length 3', 4', 6', 7', 8' or 9' (914 mm, 1219 mm, 1829 mm, 2134 mm, 2438 mm or 2743 mm)

LD Light-Duty



Omega Molding Rack Beam Kit


- Beam Kits include top, middle, bottom, and front beams
- Mount front beam one slot higher than rear beam for a sloped deck; adding a front retainer beam keeps molding in place
- Secure beams by bolting through frames in all situations
- Individual Beams:
 - °Top Beam-2" standoff
 - ° Middle Beam-8" standoff
 - ° Bottom Beam-14" standoff
- · Standard finishes: Sahara or Blue Gray

O2FMRK(NL)

O2 Omega 2" OC (51 mm)

FMRK Molding Rack Beam Kit

NL Nominal Beam Length 3', 4', 6', 7', 8' or 9' (914 mm, 1219 mm, 1829 mm, 2134 mm, 2438 mm or 2743 mm)

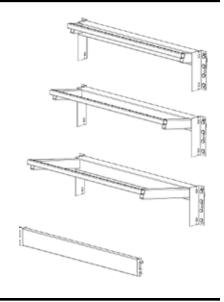

Vertical Divider Arms


- Attaches straight out from crossbar or at a 45° angle in either direction
- Regular-Duty Divider Arms 3/8" (10 mm) diameter with red neoprene safety tip
- Heavy-Duty Divider Arms 1" (25 mm) square tubing with vinyl safety cap
- Standard finishes: Sahara or Blue Gray

VDA-(NL)(TYPE)

VDA Vertical Divider Arms

NL.... Nominal Divider Length R=10"-18" (254 mm-457 mm) H=20"-30" (508 mm-762 mm)

TYPE R=Regular-Duty H=Heavy-Duty

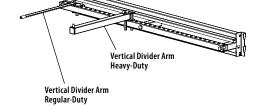

Threaded Vertical Divider Arms


- Attaches straight out from Vertical Divider Bar or at a 45° angle in either direction
- Arms may be mounted to front and/or rear of standoff bars
- Regular-duty divider arms 3/8" (10 mm) diameter with red neoprene safety tip
- Heavy-duty arms 1" (25 mm) square tubing with vinyl safety cap
- Threaded option locks arm and prevents accidental dismounting
- Standard finishes: Sahara or Blue Gray


TVDA-(NL)(TYPE)

TVDA Threaded Vertical Divider Arm

NL R=6"-20" in 2" increments (152 mm-508 mm in 51 mm increments) H=12"-30" in 2" increments (305 mm-762 mm in 51 mm increments)

TYPE R=Regular-Duty H=Heavy-Duty







Omega Garden Tool Front Beam

- Heavy-Duty Beam Body
- Keyhole Slotting to fit Wide Span Garden Display Hook

O2GTFB-(NW)

O2GTFB Omega Garden Tool Front Beam NW Nominal Width

0327=36" (914 mm) 0447=48" (1219 mm)

0567=60" (1524 mm) 0687=72" (1829 mm)

0807=84" (2134 mm)

0927=96" (2438 mm) 1047=108" (2743 mm)



Wide Span Single Hook Display

• Wide Span accessory can be used with Omega

WSSHD-24

WSSHD Wide Span Single Hook Display 24 24" (610 mm)



Wide Span Garden Tool Double Hook

 Wide Span accessory can be used with Omega

WSGTDH-24

WSGT Wide Span Garden Tool DH Double Hook 24 24" (610 mm)




Omega Light Mounting Kit

• Attaches light to Omega Box Beam

OLMK-2

OLMK-2 Omega Light Mounting Kit



Anchor Wedge

- Body: Case hardened AISI 1020/1040 or 10821 Carbon Steel
- Finish: Zinc plating per ASTM B633, SC1, Type III or B695, Class 65, Type 1

ANCWEDGE-(SIZE)(QTY)(OPT)

ANC Anchor

WEDGE Wedge

SIZE 14=½", 38=3%" or 12=½" (6 mm, 10 mm or 13 mm)

QTY 50=Pack of 50

Blank=Single Quantity

OPT....WM=Walmart



Kwik Bolt Hilti

• 1/4" X 3" Anchor Bolt

KB-HUS-EZ1/4X3

KBHUS Kwik Bolt HUS

EZ Easy

1/4 1/4" (6 mm)

3 3" (76 mm)



Anchor Bolt

- Hex nut
- ½" Diameter

KB-TZ1/2X(LENGTH)-(QTY)

KB Kwik Bolt

TZ Hilti TZ

1/2X 1/2" Diameter

LENGTH.... Bolt Length

33/4=3³/₄" 41/2=4¹/₂"

QTY Blank=1 Pack

4=4 Pack

20=20 Pack



Anchor Bolt

- Hex nut
- 3/8" Diameter

KB-TZ3/8X(LENGTH)-(QTY)

KB Kwik Bolt

TZ Hilti TZ

3/8X 3/8" Diameter

LENGTH Bolt Length

3=3"

33/4=3¾"

5=5"

QTY Blank=1 Pack 4=4 Pack 10=10 Pack

20=20 Pack





Anchor Bolt

Hex nut

MSF-ANC.25X(LENGTH)

MSF-ANC Anchor Bolt .25XBolt Diameter LENGTH Bolt Length 1.75=1.75" 2.25=2.25"




Seismic Floor Anchor Expansion Bolt

- 1 or 50 pack
- Bolt Exp 3/8-16X3 1/2, ICBO Cert

SFA-EB-(PACK)

SFA Seismic Floor Anchor EB Expansion Bolt PACK 1=1 50=50 Pack




Seismic Floor Anchor Expansion Bolt

• ½-13 X 3¾

SFA-EB-12-334

SFA Seismic Floor Anchor EB Expansion Bolt 12-334 ½-13 X 3¾



General Information

Prices All prices are subject to change without notice. Every effort will be made to give advance notice of any increase through notification from the home office. The customer will receive an acknowledgement showing prevailing prices at the time the order is processed. State or other sales or use taxes, freight and surcharges will be charged when applicable. Freight quotes may be provided based upon information available at time of quote, but are not guaranteed. Active freight charges will be billed if applicable. When market conditions dictate, a surcharge may be implemented. All quotations automatically expire at the end of 30 days.

Terms Cash in advance prior to production or net 30 days if open account status is approved by Madix Credit Department. MasterCard, Visa, and American Express are accepted.

Acceptance All orders, contracts, and agreements are subject to Madix's acceptance and approval. Madix shall not be liable for any delay in the performance of any order, contract, in the delivery of any goods, or for any damages resulting from such delay, when such delay is directly or indirectly caused by or due to fire, flood, accident, riot, act of God, war, governmental decree or order, strike, labor difficulties, shortage of labor, fuel, power, material or supplies, transportation delay or any other delay or causes (whether or not similar to any of those herein before specified) beyond our reasonable control. Order acceptance will be per the conditions and terms outlined in Madix's acknowledgement. Mailing of the acknowledgement will signify Madix's acceptance of the order.

Minimum Charge Orders are subject to a minimum charge of \$50.00 net (merchandise only) per shipping destination.

Changes and Cancellations Customer requested changes and cancellations are subject to approval by Madix. Every reasonable effort will be made to accommodate these requests without additional cost to the customer. Any manufacturing or engineering costs incurred will be charged to the customer. Orders produced and delayed for more than one week may incur charges for demurrage, unloading, or other storage costs. Madix will advise customers of the estimated charges at the time changes or cancellations are made.

Shipments Method and route of shipment are at Madix's discretion unless Madix is furnished with complete shipping instructions at least ten (10) days before the scheduled shipping date. Freight is FOB/EXW Madix shipping point.

Freight Claims For common carrier shipments, claims must be made directly with the carrier by the recipient. Listed are the types of losses which may occur, and your responsibility in handling them:

Loss of Freight: It is the receiver's responsibility to count the freight at the time of delivery. Any exception must be noted on the carrier's delivery receipt at time of delivery.

Damage of Freight: As with a loss of freight, damage of freight must be noted on the carrier's delivery receipt at the time of delivery. It is the receiver's responsibility to make sure that the freight is inspected for visible damage and that the number of pieces damaged is marked on the carrier's delivery receipt. Failure to note visible damage at the time of delivery will result in non-payment of a damage freight claim. Salvage must be held for the carrier.

Concealed Damage: If goods are received in apparently good condition but there is concealed damage, it is the customer's responsibility to contact your Madix Service Representative within 15 calendar days from delivery. Customer must keep the product and the packaging so that an inspection may be conducted by the carrier. Failure to handle a concealed damage claim in this manner could greatly reduce the amount

Returned Goods Returned Goods requests must be submitted to Madix, Inc. within 60 days after receipt of product. Authorization must be in writing on Madix's RGA (Return Goods Authorization) form. Goods must be received within 30 days of RGA issue date for credit. Customer is responsible for delivery of authorized returns to Madix designated location in condition originally received. Only Code A products finished in returnable colors as indicated on the finish policy pages will be considered for return, and only items in unused, in resalable condition, and in the original packaging. No special size, color, or specially manufactured parts or products are eligible for return unless sent to the customer as the result of an error by Madix. Only merchandise listed on the RGA will be accepted for conditional return. Credit will not be issued for that portion of merchandise that is not considered resalable. A handling and restocking charge of 25% of the invoice price will be charged for all approved returns. Submit requests to your Madix Sales Representative or Customer Service Department prior to returning any merchandise. All returns must be have the customer name and Madix RGA number prominently displayed on each package. Product to be shipped prepaid at customer's expense unless prior approval has been received from an authorized Madix Representative.

Warranty We warrant to the original purchaser that all products manufactured by Madix are free from defects in material and workmanship. This warranty is invalid if products or parts are modified or used in a manner other than the intended purpose. Our obligation under this warranty is limited to repairing or replacing of any part or parts which shall, within one (1) year after delivery to the original purchaser, be demonstrated to be defective under normal use and service. This warranty is in lieu of all other warranties, expressed or implied, and of all other obligations or liabilities of any kind on Madix's part, and no modification of this warranty shall be valid or binding unless in writing and signed by an officer of Madix, Inc.

Production Madix fixtures are manufactured utilizing the most current technology of highly automated systems with process control techniques. Skilled craftsmanship, combined with automatic presses, roll forming machines, multi-spot welders, conveyers, finishing equipment and thorough inspections produce store fixtures of the highest quality.

Upright Carefully engineered of heavy gauge, high quality steel components, the UPRIGHT is slotted one inch on center for maximum flexibility, shelf adjustability and use of available space. Standard heights range from 36" through 96" with built-in leveler. For the finishing touch at the end of the shelving run, the snap-on UPRIGHT END COVER is made of durable, scuff and impact resistant plastic or heavy gauge metal. The UPRIGHT CAP, made of high impact plastic, has provision for a sign holder.

Base Shoe The five inch low BASE SHOE features exclusive "I" beam design, engineered of projection welded high strength steel parts insuring maximum load capacity. Snaps securely into upright with leveler and electrical access allowing for quick error free installation. For the finished look, the one piece slip on BASE END COVER is made with a high impact plastic nose reinforcement to protect base shelf tag molding.

Spanners Snap-in support SPANNERS keep uprights at equal spacing and hold the back panels rigid. Each spanner has knockouts for electrical access and telescoping uprights.

Back Panels High density hardboard BACKS fit flush to the face of the upright. A wide variety of finishes include solid, pegboard, and wood grain in a wide assortment of optional colors. Mirrors and open backs are also available.

Kickplate Fully floating feature of kickplate allows flush fit against uneven floors, snaps in and out without disturbing base shelf for easy cleaning. Convenient knockout accommodates electrical access.

Base and Upper Shelves Steel base shelves feature lock tabs to insure quick installation and precision alignment. A double row of 1/4" inch perforations on the front and rear edge makes any form for binning possible. Slim bracket, high tensile design with flat or 15 degree downslope upper shelf positions allow for maximum merchandise visibility. Integrally formed price tag molding accommodates 11/4" tag. Upper shelves available in 8", 10", 12", 14", 16", 20", 22", 24", 26", 28", and 30" depths. Base shelves available in 12", 14", 16", 18", 20", 22" 24", 26", 28" and 30" depths.



Shelf Loading The recommended load capacity for upper shelves is based on evenly distributed weight. Capacities are reduced by 35% when front half is loaded and reflect rated maximum load. Load capacities are shown in the General Information Section under Shelf Loading.

Baked Enamel, Powder Coat Finishes All metal parts are finished with a specially formulated high solids or powder which are electrostatically bonded in a unique multi-stage process, to insure the highest quality finish. Aerosol cans of Touch-up paint are available in Madix's standard and optional colors. FAA regulations prohibit the shipment of this product by air or in export containers by air or ocean to countries outside the United States.

Product Maintenance When necessary to clean Madix shelving, use a non-abrasive mild detergent and warm water, followed by thorough drying. The use of a cloth made of a soft white cotton material is strongly recommended. The use of cleaning products that contain abrasive, bleach, or strong solvents, such as ketones, ethers, etc. will result in damage to the finish. The damage is most severe when these harsh cleaning agents are used on colors which contain leafing aluminum pigment such as powder chrome, silver vein, and other "vein" type finishes. The aluminum in these coatings resides at the surface of the finish and is therefore susceptible to damage by the harsh cleaning agents. As an alternative to the mild detergent, cleaners with ingredients similar to those found in products such as 409, Fantastik, and Simple Green can be used. Caution! Cleaners having ingredients similar to those found in Ajax, Borax, Comet, etc. should be avoided as finish damage could result.

Codes In your planning stage, consult with local municipal engineers to determine what codes and restrictions will be applicable in the locations where the shelving will be used. Codes may include: state, local, fire, building, and health and safety codes. Seismic requirements may apply in some locations. For example, in most locations fire codes state that fixtures need to be at least 18 inches below the sprinklers.

Shelving Selection Take into consideration the load that is expected not only on each shelf but also on the unit as a whole. Take into account the upright capacity. Refer to the load capacity information that is in the Madix Standard Catalog. Madix shelves are rated using an evenly distributed load. Do not install shelves or accessories that extend beyond the depth of the Base Shelves. Consider making the Base Shelves and low height fixtures a contrasting color from the floor's color to prevent potential tripping hazards. Do not use Madix parts or accessories for any purpose other than originally intended by Madix.

Shelving Installation Initial installation or relocation of Madix shelving should be supervised by qualified personnel. Madix products should be installed according to Madix's specifications. Madix's installation sequence must be followed for assembly and leveling. An improperly installed store fixture has a poor appearance and may cause a dangerous condition. Be especially careful when leveling fixtures with offset loads in which one side of the fixture has a considerably heavier load than the other side. Dismantling and reassembling used Madix shelving can be dangerous if the installers who are doing the work leave out parts, use damaged parts, or do not reassemble the product by Madix's specifications. Do not alter, modify, or structurally change any shelving component. Do not move assembled shelving. Only parts and accessories that are produced and supplied by Madix are covered by the Madix warranty. Do not assemble Madix fixtures with parts from other manufacturers. Under no circumstances should you use damaged parts. When assembling Gondola/Wall Shelving, install Kickplates to protect the Base Shoes from floor cleaning equipment and to offset the possible bumping and misalignment of the shelving runs. Do not install shelves or accessories on the sides of wall sections or any section that is not supported by Base Shoes. Use caution when handling and transporting shelving parts. Be careful when cutting shrink wrap from pallets because the shelving parts can dislodge from the wrap and fall. Cut the wrap gradually from the top, only as much as you need to remove the product from the top. Two common hazards while installing store fixtures are: employées hurting themselves with improper types of box cutters and employees putting boxes on the floor and then tripping over them.


Anchoring and Floors Depending on code requirements and Madix's specifications, some products must be anchored to the walls and/or floors. Do not lean tall or heavy objects against unanchored shelving systems. Retailers must consider the type of floor upon which the shelving will be installed.

Impact Loading Impact during the loading and unloading of merchandise can create an adverse loading situation and may result in damage to or failure of the Madix shelving. Do not walk or climb on Madix shelving.

Overturning Overloading the top portion of the shelving, non-uniform loading, out-of-plumb installation, and impact can cause shelving to overturn. Improperly installed Madix shelving with offset loads can cause store fixtures to collapse. Carefully follow Madix's installation instructions in order to prevent shelving from overturning.

Additional Shelving Safety Pointers Product loading instructions are included with each Madix order. Retailers must make merchandisers aware of the product's load limitations and the dangers of overloading the shelving. Remove any merchandise or overstock before attempting to move Madix shelving. Periodically inspect your Madix shelving for damaged or loose parts. Make sure that shelves and accessories are properly seated in the slotting or perforations. Make sure that shelves and accessories are not overloaded. As merchandising changes, beware of creating offset loads on shelving runs that are not properly leveled. Look for leveling warning signs such as increased gaps between shelves or accessories that may indicate that the shelving runs need re-leveling. Damage to Madix shelving is dangerous. In some cases, the shelving should be unloaded immediately and repaired or replaced before returning to service. Re-level fixtures that you have bumped or moved. Incorporate safety into your merchandising strategy. When possible, merchandise the heavier products on the lower shelves. If the merchandise will not fit on the Madix shelves and there is a replenishment cycle, make sure that the cycle is a safe one. Make sure that merchandise and overstock are properly stacked and maintained so that items will not fall into the aisles. Assure that customers who handle merchandise or overstock will not push product from one side of the Madix fixture to the other side where people could be injured from falling merchandise. Safely secure overstock that is placed on Madix shelves overhead. Measure the difficulty that your employees have in retrieving overstock, and consider whether employees or customers could be injured if the product happens to fall from the shelving units. Teach employees and inform customers that Madix shelves should never be used as ladders to reach higher shelves. Ladders should be clearly marked for employees use only and should not be left unattended, or customers will try to remove stock on higher shelves by themselves. Notify customers to ask for assistance when they need product that is out of their reach.

> POSSESSION OF THIS CATALOG IS NOT AUTHORIZATION TO SELL MADIX PRODUCTS! ALL FACTORY QUOTES ARE GOOD FOR 30 DAYS ONLY.



General Information

Finish Policy for Metal Products

Standard Colors, Returnable - Code A Madix standard returnable colors for display shelving are Sahara, Blue Gray, Oyster, Snow White, and Satin Black. Madix standard returnable colors for wire products only are Powder Chrome and Silver Vein. All catalog items are priced in standard color.

No Charge Colors (Non-Returnable) - Code B Madix non-returnable colors offered at the standard price are Chocolate, Dove Gray, Dover White, Fashion Gray, Skyline Gray and Tru Gray. All catalog items are priced in standard color.

Optional Colors-Level I Finishes (Non-Returnable) - Code B Madix offers optional colors, also known as Grade I Finishes, at additional charge: Bright Orange, Hollyberry, Hunter Green, Mandarin, Neon Blue, Spectrum Blue, Spectrum Green, Spectrum Red and Valencia. Products painted with these colors are non-returnable.

Metal Components: \$350.00 line charge plus published per-piece charge. Metal Back panels: \$350.00 line charge plus published per-piece charge.

Special Colors – Code C Use line change charge plus per piece charge supplied by customer service. Special colors are non-returnable.

Pricing For Levels II To IV:

Level II: 1.6 x Optional Color Upcharge. Example: Optional upcharge for SUS is \$1.50; upcharge with Level II finish will be \$2.40.

Level III: 2.8 x Optional Color Upcharge. Example: Optional upcharge for SUS is \$1.50; upcharge with Level III finish will be \$4.20.

Level IV: 3.8 x Optional Color Upcharge, Example: Optional upcharge for SUS is \$1.50; upcharge with Level IV finish will be \$5.70.

Metal Components: \$500.00 line charge plus published per-piece charge. Back panels: \$350.00 line charge plus published per-piece charge.

Maintenance for Metal Products

Baked Enamel and Powder Coated Finishes All metal parts are finished with a specially formulated high solids or powder which are electrostatically bonded in a unique multi-stage process to insure the highest quality finish. Aerosol cans of touch-up paint are available in Madix's standard and optional colors. FAA regulations prohibit the shipment of this product by air or in export containers by air or ocean to countries outside the United States.

Product Maintenance When cleaning Madix shelving, use a non-abrasive mild detergent and warm water, followed by thorough drying. Using a soft white cotton cloth is strongly recommended. Cleaning products containing abrasives, bleach, or strong solvents will result in damage to the finish, especially when used on colors containing leafing aluminum pigment, such as powder chrome or vein-type finishes.

Finish Policy for Wood Products

High Pressure Laminate The terms "laminate" or "HPL" are commonly applied to this material which consists of multiple layers of paper infused with phenolic resin and topped by a finish paper coated with clear melamine resin, all totally bonded under high pressure and heat. The finished sheet has extremely high wear and impact resistance.

Customer Specified High Pressure Laminate Madix coding is based on Wilsonart availability. Laminates other than Wilsonart may require additional lead time.

- Customer specified laminates add \$100.00 per pattern, per order
- Additional charge will apply based on the laminate grade that is chosen

Laminates that are not from a laminate manufacturer's standard samples (metallics, heavy textures, wet looks, core edge, special prints) will require a special quote. Contact Customer Service for specific pricing on laminates not listed above.

Thermofused Panels Thermofused panels are ideal for non-wear surfaces and have substantial impact and wear characteristics compared to melamine panels previously available. The product is produced using hot press laminating polyester or melamine resin impregnated self-bonding paper to wood substrate. Performance specifications are available from the American Laminations Association. Madix does not recommend the use of Thermofused panels on horizontal or other wear surfaces.

Printed Mirror Hardboard Printed materials are primarily used for back panels, but appear as various other products. These materials are carefully cross matched to the corresponding laminates and Thermofused. Mylar mirror hardboard is used in the same applications and is also available in pegboard and grooved pegboard. Finish Policy for Back Panels

Standard Colors, Returnable - Code A Madix standard returnable colors for display shelving back panels are Sahara, Oyster, and Snow White. Optional Colors-Level I Finishes (Non-Returnable) - Code B Madix non-returnable back panel colors offered at the optional price are Chocolate, Dove Gray, Dover White, Fashion Gray, Satin Black, Skyline Gray, Blue Gray and Tru Gray. Set-up charge of \$350.00 applies.

Optional Colors-Level II Finishes (Non-Brilliant) - Code B Madix offers optional back panel colors also known as non-brilliant finishes at an additional charge. These colors include custom grays, off whites, tans, and beiges not listed in Madix's Finishes brochure. Products painted with these colors are non-returnable. Set-up charge of \$350.00 applies.

Optional Colors-Level III Finishes (Brilliant) - Code C Brilliant back panel finishes include Hunter Green, Neon Blue, Spectrum Blue, and Spectrum Green. Set-up charge of \$350.00 applies.

Optional Colors-Level IV Finishes (Reds and Yellows) - Code C Use line change charge plus per piece charge supplied by customer service. Special colors are non-returnable. Set-up charge of \$350.00 applies.

Pricing For Levels II To IV

Level II 1.2 x the difference between the Hardboard/Pegboard Optional Color pricing and the Hardboard/Pegboard Sahara pricing. Example: Optional upcharge for a BH-342 with a Level II finish would be calculated as follows: \$13.85 - \$12.45 = \$1.40 x 1.2 = \$1.68. The color upcharge for a BH-342 with a Level II finish is \$1.68. This upcharge amount will be added to the Optional Color price of a BH-342. The new price of a BH-342 using a Level II finish is \$15.53 (\$13.85 + \$1.68 = \$15.53).

Level III 1.4 x the difference between the Hardboard/Pegboard Optional Color pricing and the Hardboard/Pegboard Sahara pricing. Example: Optional upcharge for a BH-342 with a Level III finish would be calculated as follows: \$13.85 - \$12.45 = \$1.40 x 1.4 = \$1.96. The new color upcharge for a BH-342 with a Level III finish is \$1.96. This upcharge amount will be added to the Optional Color price of a BH-342. The new price of a BH-342 using a Level III finish is \$15.81 (\$13.85 + \$1.96 = \$15.81).

Level IV 1.8 x the difference between the Hardboard/Pegboard Optional Color pricing and the Hardboard/Pegboard Sahara pricing. Example: Optional upcharge for a BH-342 with a Level IV finish would be calculated as follows: \$13.85 - \$12.45 = \$1.40 x 1.8 = \$2.52. The color upcharge for a BH-342 with a Level IV finish is \$2.52. This upcharge amount will be added to the Optional Color price of a BH-342. The new price of a BH-342 using a Level IV finish is \$16.37 (\$13.85 + \$2.52 = \$16.37).


NOTE! See Finishes Brochure for color samples.



General Information

Part Name A	Part Number	Page Numbe
A — @Front Roller Mat	AFRSPR4747-BLK	
©Front Roller Shelf Divider with Pusher Shelf	AFRSWDPUSH547-6PK	2
Front Roller Shelf Offset Front Stop for Pallet Rack	RSFSFPRWS(NW)	2
Front Shelf Plastic Front	AFRSPF(NH)(NW)	2
Front Shelf Plastic Front, Heavy-Duty	AFRSPF(NH)(NW)H	2
Front Roller Shelf Wire Divider	AFRSWD547	
Front Roller Shelf System for Heavy-Duty -Frame Trailer Coupler Angled	AFTCA/NII \	
djustable Tire Beam	AFTCA(NL)	4
djustable Tire Displaydjustable Tire Display	Q1067 1-(NF)(NL)-2 010871-35(NI)-2	4
nchor Bolt	KR-T71/2X(I FNGTH)-(OTY)	
Inchor Bolt		
nchor Bolt	MSF-ANC.25X(LENGTH)	
nchor Wedge	ANCWEDGE-(SIZE)(QTÝ)(OPT)`	
attery Rack Retainer Wire	BRRW-36	
·		
enter Spanner ross Merchandise Basket	SC-(NW)	22, 42, 6
ut Plywood Divider	OCPD-(ND)	
Og Food Display Deck		
Oog Food Display Front/Rear Beam	DFD(TYPE)-(NW)-(OPT)	4
xtension Back		22,4
low Through Pallet Rack Deck	FTPR2D-(ND)(NL)	
low Through Wide Span Deck	FTWSD-(ND)(NL)	
ravity Feed Beam		
ravity Feed Wire Deck	HMGFWD-480648	
ravity Feed Wire Deck	HMGFWD-360860	4
	HMHDFR48-II	
leavy-Duty Merchandise Hanger	TIIVII IDI D -1 0-0	······
leavy-Duty Wide Span Deck Support	HDWSDS48	
lorizontal Divider Arm, Step Beam	HDA-SB-(ND)	
lypermaxi & Wide Span Sign Holder	HMSASH(NL)(NH)(OPT1)(OPT2).	
lypermaxi Front Tire Beam	HMFTB3548-2	
lypermaxi Rear Tire Beam	HMRTB3548-2	
lypermaxi Regular-Duty Sliding Door Kit Beam	HMRDSDKB(NW)-(OPT)	
(wik Bolt Hilti		
EDge Light Beam Canopy Cover	LLBCC(CONF)(NW)-(OPT)	L
ight-Duty Wide Span Front Beam	I DWSFR(NI)	
ower Spanner	SL-(NW)	
М		
A Vertical Divider for Pallet Rack Box Beam	MVDA-(ND)(NH)(TYPE)-PR	
A Vertical Divider for Pallet Rack Molding Rack Beam	MVDA-(ND)(NH)R-M	
A Vertical Divider Single Arm	MVDSA-(ND)	•••••
A Vertical Divider Single Arm A Vertical Divider with Three Supports for Pallet Rack	MVDA3-3072-PR	
Лахі Rack		
Maxi Rack Back-to-Back Connector		
Maxi Rack Beam	MKFB(UP1 I)-(NL)(UP12)	
Maxi Rack Dart Clip	W.SULZD-DU /TV/DE/	
Maxi Rack Deck'	vv >ΠΙΥΙΝΝΟ(ΙΝΝ)(INL)-(I YPE) (TVDE)(Μ/CDC/MD)	
Naxi Rack Deck Support	(1 T E) W > U > (W) MRF(NIN) (NIU) (NDT)	
Naxi Rack Frame	IVINF(IND)(IND)-(UP1) MRF2060FA	
Naxi Rack Frante Naxi Rack Gravity Feed Beam, Light-Duty		
Naxi Rack Gravity Feed Retainer Wire	BRRW-20	
Naxi Rack Gravity Feed System		
Naxi Rack Gravity Feed Wire Deck	HMGFWDLD-200248	
Maxi Rack Header	BRIH(NW)	
Naxi Rack Rear Product Retainer	HMWMSŔPR48	
Naxi Rack Side Product Retainer	WSSPR(ND)	
Maxi Rack Top Cap	WSTC-(PACK)-CL	
Maxi Rack Wire Deck	WSHMWD-(NL)(ND)1/2X6	
Maxispan		
Maxispan Base Deck Beam	MS2BDB-(NL)	6
Maxispan Beam	MS2B(NH)(NL)-2	
Maxispan Deck Support	DSKMS-(ND)-1	
Maxispan Deck Support	MW2D2-(ND)	6
Maxispan Heavy-Duty Decking	MNDHUU-(NU)	<u>.</u>
Maxispan Upright	MSZU(NH)-(ND)	
Anniaman Mataufall Mina Cui - D 1-		
Maxispan Waterfall Wire Grid Deck Maxispan Wire Grid Decks	(VI) VV F VV (D (VI D) (INL) - 3	

Part Name O	Part Number	Page Numbe
Omega Box Beam		
Omega Deck Frame Support		
Omega Deck Half Bottom	ODHB(ND)(NL)-U	68
Omega Deck Regular-Duty Top Omega Deck Shelf		
Omega Deck Shelf Bottom		
Omega Deck Shelf Support		
Omega Display Beam	02DB(0PT)(NL)HD	64
Omega Floating Upright Support Bracket	MOUSB-(ND)-F	64
Omega Frame		
Omega Frame Deck	OD(ND)(NL)-U	67
Omega Frame Upright Omega Garden Tool Front Beam	UFU(NH) OCCTED (NIM)	
Omega Light Mounting Kit		
Omega Merchandising System		
Omega Molding Rack		69
Omega Molding Rack Beam Kit	O2FMRK(NL)	70
Omega Molding Rack Beams	02FMRB(NL)-(0PT)	69
Omega Retainer Beam	O2DBF(NL)-LD	70
Omega Tubular Deck Support		
Omega Upright	OU(NH)	62
Omega Wire Grid Deck Omega Wood & Wire Deck	UVVIVI3(ND)(NL)-3	00 67
P ————————————————————————————————————		0/
Pallet & Omega Rack Deck Support		5.65
Pallet Rack 2" Pallet Stop Beam	PR2PSB(NW)	رن ,رد
Pallet Rack Back-to-Back Connector	PRBBC(ND)	8,66
Pallet Rack Basic Upright	PRBU-(NH)	22, 42
Pallet Rack Basic Upright Support	PRBUNDS-(ND)	22, 42
Pallet Rack Basic Upright Supports, Beam Length	PRBUNWS-(NL)	22, 42
Pallet Rack Basic Upright, Flush Side	PRFSBU-(NH)	22, 42
Pallet Rack Beam Cover with Sign Holder Pallet Rack Beam		
Pallet Rack Bottom Beam		
Pallet Rack Center Support Arm		
Pallet Rack Deck Support	MPRDS-(ND)	5
Pallet Rack Deck Support	MPRDS-24	38
Pallet Rack Floor Anchor Kit		
Pallet Rack Flush Deck Support		
Pallet Rack FramePallet Rack Frame Guard	PK2(I YPE)F(ND)(NH)	4, 17, 20, 25
Pallet Rack Frame GuardPallet Rack Frame Protector	PKUG ED10	5 2
Pallet Rack Gravity Feed Channel	PR(ND)GFC(DROP)-(NW)02	
Pallet Rack Heavy-Duty Cantilever End Shelf Deck		
Pallet Rack Heavy-Duty Cantilever End Shelf Frame	PR2HDFCESFA(NW)(ND)	23
Pallet Rack Heavy-Duty Decking	MPRHDD-(ND)	6
Pallet Rack Ladder Display Assembly	PRLDA33	14
Pallet Rack Leveling Shim	PKSHM	
Pallet Rack Loop Merchandiser Paller Rack Offeset Security Doors	PK2LM-(D)-(TYPE)	13 10
Pallet Rack Pallet Stop	PRPS_(NI)	دا ۶ ۸۲
Pallet Rack Pipe Bracket, Front Mount	PRPB-(ND)FM	
Pallet Rack Pipe Bracket, Side Mount	PRPB-(ND)	15
Pallet Rack Regular-Duty Deck	MPRRDD(ND)(NL)-(TYPE)	
Pallet Rack Regular-Duty Support Wire Hanger Bracket .	MPRDSWHB-(0PT1)-(0PT2)	38
Pallet Rack Roll Goods Display	DDDCT (ANA)	23
Pallet Rack Roll Goods Tube Pallet Rack Roll Goods Tube Holder	PKKGI-(NW)	23
Pallet Rack Roll Goods Tube Holder Pallet Rack Security Deck	INING I II PRI ISD_/NIW/\/ND\	23 17
Pallet Rack Security Door Hardware Kit	PRSDHK-1	17 17 20
Pallet Rack Security Door Hinge Hardware Kit	PRSDHHK	17, 20
Pallet Rack Security Doors	PRSD2X2-(NW)(NH)(OPT)	17, 20
Pallet Rack Side Security Panel	PRSSP-(NH)(ND)	16, 19
Pallet Rack Stop 2" OC with 3" Offset	PR2PS3-(NW)	
Pallet Rack TV Bracket	LCDTVCBPKEM(NW)	16
Pallet Rack Upper Security DeckPallet Rack Upper Security DeckPallet Rack Upright with Security Panel	rnuɔu-(เทพ)(เทบ) pri icp_(nil)	اککا ۱۲
Pallet Rack Upright with Security PanelPallet Rack Wall Mount Bracket	PRWMR-(ND)	دا))
Pallet Rack Waterfall Wire Grid Deck	PRWFWGD(ND)(NI)-3	
Pallet Rack Wire Grid Deck	PRWMS(ND)(NL)-3	
Pallet Rack Wire Grid Product Retainer	PRWGPR-(NW)(NH)	18
Pallet Rack Wire Grid Product Retainer 2"OC w/Ext. Bracke	(
	PRWGPR2X2-(NW)(NH)	18



Alphabetical Index -

Part Name	Part Number	Page Number
R —		
Recessed Pegboard Panel	RPP-(NW)(NH)	34
Recessed Pegboard Panel Frame	RF-(NW)(NH)	34
Regular-Duty Wide Span Frame		
Regular-Duty Wide Span Front Beam with Tag Molding	RDWSFB(NW)-(U)-(TAG)-(UD)-(F	T)28
Roll-Around Wide Span Unit	RAWSU-24(NW)60(OPT)	39
Rug Display Clip	RDC-40	12
Rug Display for Box Beam	RDBB	12



s ————		
Seismic Floor Anchor Expansion Bolt	SFA-EB-(PACK)	73
Seismic Floor Anchors Expansion Bolt	SFA-EB-1	25
Seismic Floor Anchor Expansion Bolt	SFA-EB-12-334	73
Splicer Spanner	SS-(NW)	66
Suspended Maxi in Pallet Rack		21
Suspended Wide Span	Q1086471-(NH)(NL)-2	35
Suspended Maxi in Wide Span		41
Suspended Wide Span Frame Adapter	SWSFA	35
T		
Threaded Vertical Divider Arm	TVDA-(NL)(TYPE)	36,70
Top Spanner	STL-(NW)	22, 42, 66
Top Spanner Clip	STLCLIP	22,42
Trailer Coupler & Jack Display		40
Trailer Hitch Support Arm	THSA(NL)	40
Trailer Hitch Support Bracket	THSB	40
Vertical Divider Arm	VDA-(NL)(TYPE)	11, 36, 70
Vertical Divider Arm Heavy-Duty Scan Hook	VDAHDSH-(NL)	36
Vertical Divider Arm Heavy-Duty with Front Lip	VDA-(ND)H-FL	37
Vertical Divider Arm with 15° Uptilt, Heavy-Duty	VDA1SDÚ-(NL)H	37
Vertical Divider Arm with 45° Hook		
Vertical Divider Arm with with Price Tag Holder		
Vertical Divider Bar	VDBPRB-(NW)(ND)	11
W		
Weed Eater Holder	WEHPR	15
Wide Span		27
Wide Span Back-to-Back Connector		
Wide Span Back-to-Back Side Mount Rug Display Bar	WSBBSMRD(NL)(ND)	33
Wide Span Beam		
Wide Span Bulk Merchandiser		45
Wide Span Center Support Arm		
Wide Span Dart Clip		
Wide Span Dart Clip	WSDC25-50	29
Wide Span Deck		
Wide Span Deck Kit	RDWSK(ND)(NL)-U	30
Wide Span Deck Kit, Wire Grid	RDWSK(ND)(NL)-WG	30
Wide Span Deck Support	RDWSDS(ND)	29
Wide Span Deck Support, Economy	RDWSDSE(ND)	29
Wide Span Dog Food Display	RDWSFDF(ND)(NH)-REV	44
Wide Span End Frame Kickplate	WSEFKP(ND)-(COLOR)	34
Wide Span Floor Anchor		
Wide Span Floor Anchor with Nut & Bolt		
Wide Span Frame Connector		
Wide Span Frame Extension	WSFE-4860	45

Part Name	Part Number	Page Number
Wide Span Frame	. (TYPE)WSF(ND)(NH)	28
Wide Span Garden Tool Display Bar	. WSGTDB-(NL)	13, 37
Wide Span Garden Tool Display Double Hook	. WSGTDH-(ND)	13, 37, 71
Wide Span Gravity Feed Battery Rack		43
Wide Span Gravity Feed Beam	. HMGFB-48(TYPE)	51
Wide Span Gravity Feed Beam	. WSGFB-(NW)-(OPT)	26
Wide Span Gravity Feed Channel	. WS(FD)GFC(RISE)-(NW)02	50
Wide Span Gravity Feed System		50
Wide Span Hinged Door Kit	. WSHDK-(NW)(NH)-(OPT1)-(OPT2)-(H	IAND)48
Wide Span Sign Holder Frame	. WS(OPT1)SHF(NW)(NH)(OPT2)	52
Wide Span Hypermaxi Sign Holder Modified Shelf Mount	WSHMSHFM(NW)(NH)	52
Wide Span, Inside-Mount, Forward-Facing Peg Hook		
Wide Span Leveling Shim	. WSLS-10	33,43
Wide Span Low Profile Metal Deck		
Wide Span Molding Rack Beam		
Wide Span Product Divider		
Wide Span Product Retainer	.WSPR(NH)(NL)	34
Wide Span, RD, Beam-Mount, Long-Handled Tool Hook	.WSRDBMLHTH-06	38
Wide Span Rear Wire Grid Security Panels	.WSRWGSP(NW)(NH)	48
Wide Span Retainer Pin		
Wide Span Roll Goods Display		39
Wide Span Roll Goods Tube	.WSRGT-(NW)	39
Wide Span Roll Goods Tube Holder	.HMRGTH	39
Wide Span Security Doors		47
Wide Span Security Doors		
Wide Span Security Rear Panel		
Wide Span Sign Holder, Adj. Ht., Top-Post-Mounted Arm		
Wide Span Single Deck Display Frame	.WSSDDF-48(NH)(OPT)	46
Wide Span Single Deck Display Frame, Sealed	.WSSDDFD-4848-U	46
Wide Span Single Hook Display	.WSSHD-(ND)	13, 37
Wide Span Single Hook Display		
Wide Span Top Cap	.WSTC-(PACK)-CL	29
Wide Span Upright Support Bracket Offset		
Wide Span Vertical Divider Beam		
Wide Span Waterfall Grid Deck		
Wide Span Wire Grid Deck, 1 x 6	. WSWMS(ND)(NL)-16	32
Wide Span Wire Grid Deck	. WSWMS(ND)(NL)-3	30
Wide Span Wire Grid End Security Panel		
Wire Grid Divider	. WGVDA-(ND)(NH)-CPR	10











Our Purpose

Valuing people so they feel safe, inspired, and fulfilled.



















Innovation on Display Since 1956



www.madixinc.com

Texas 500 Airport Road, Terrell, TX 75160 | 1010 S. Bolton, Jacksonville, TX 75766 **Alabama** 20984 Alabama Hwy. 9, Goodwater, AL 35072 | 500 Madix Drive, Eclectic, AL 36024