

CLOUDNOLA

www.cloudnola.com



Block Clock

3-in-1 LED Alarm Clock
time, temperature and date

SPECIFICATIONS

LED Light Color: White

Power Supply: USB cable (DC5V/500MA)

3.54 ft / 108 cm included

3 x AAA back up batteries included

Calendar: 2000-2099

12/24 hour format selectable

3 different Alarms

4 level of brightness

Product dimension:

2.52*2.44*2.52 inches / 6.4 x 6.1 x 6.4 cm

Net weight: 3.6oz / 101 gram

Package dimension:

3.15*3.15*3.54 inches / 8 x 8 x 9 cm

Shipping weight: 6oz / 169 gram




Time
LED Display




3 Single
Alarms



Temperature
(F / C)

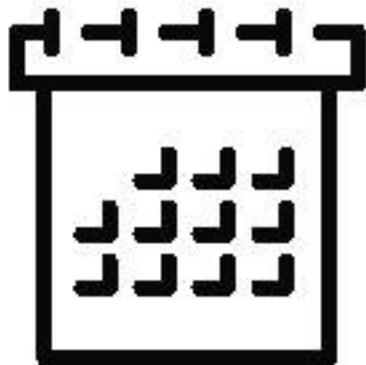

Calendar

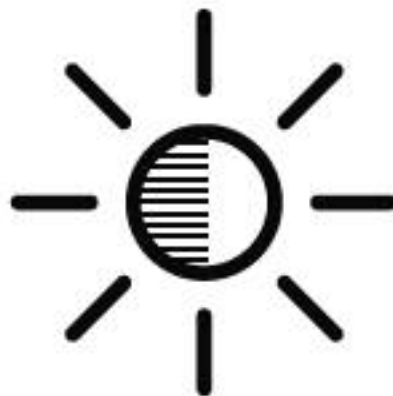


4 Level
Brightness



12 or 24 hours
display

ENGLISH INSTRUCTIONS

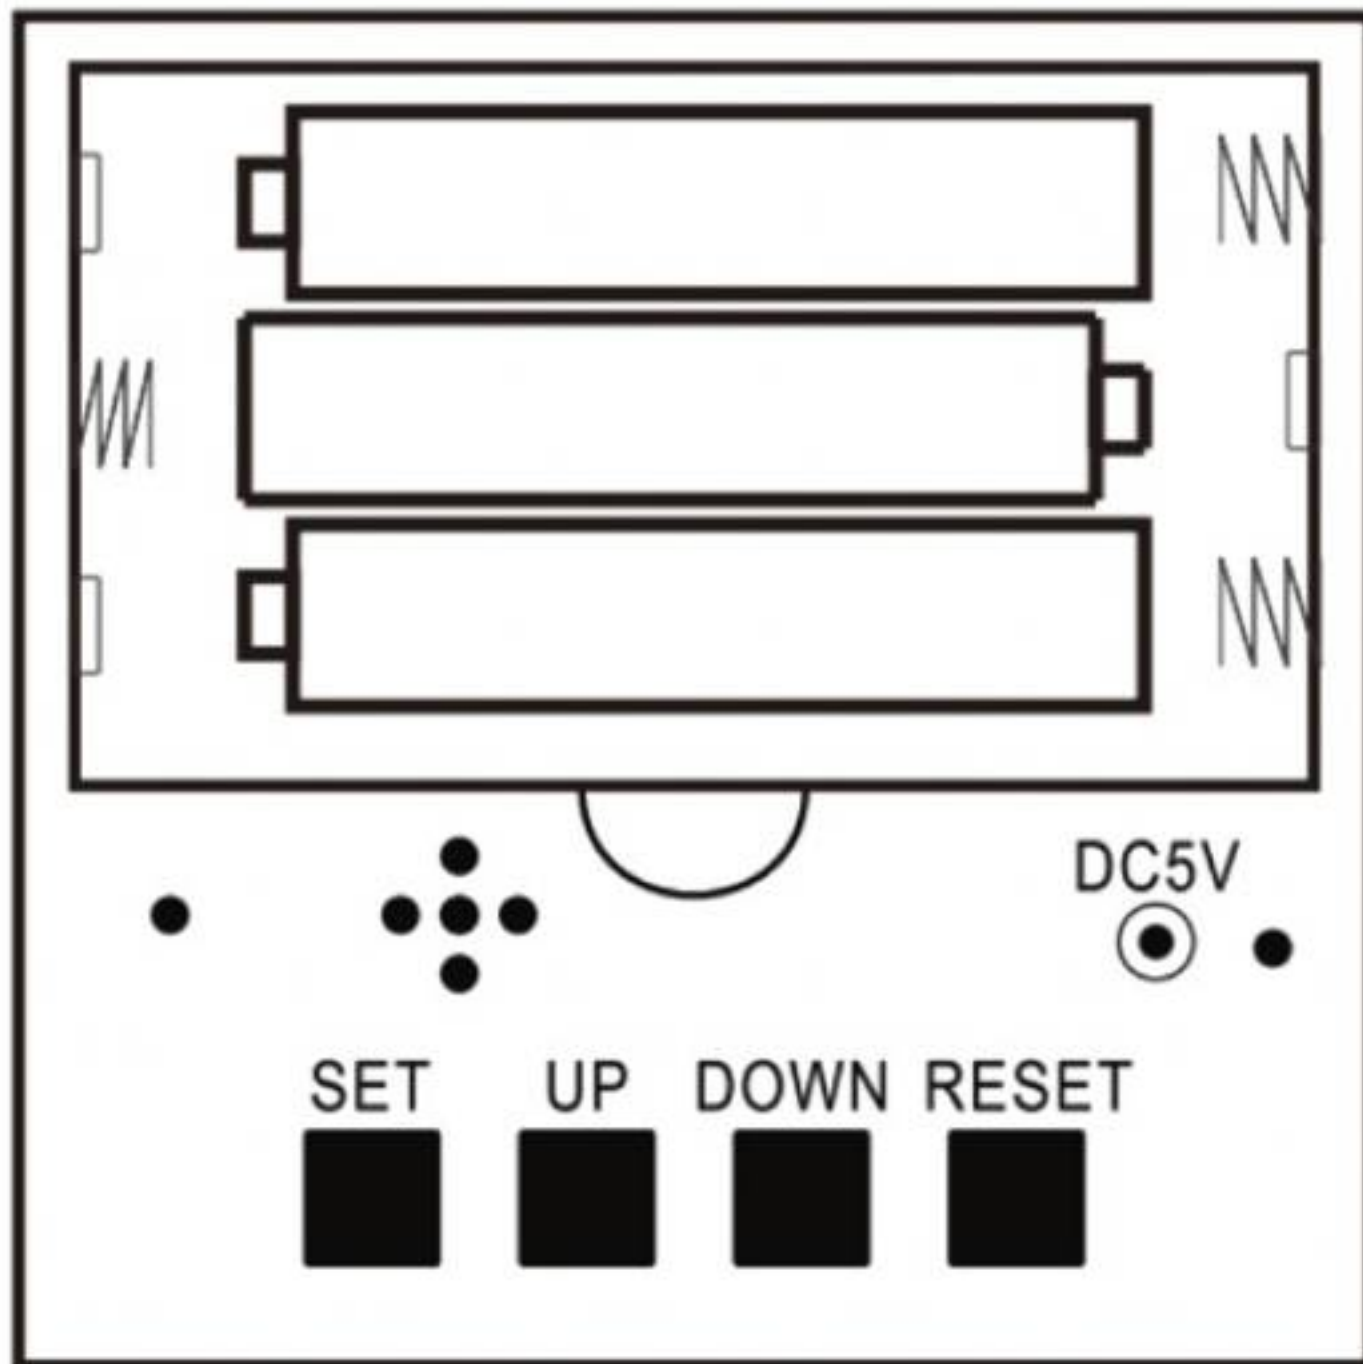

1. REMOVE PLASTIC COVER

Please remove the battery plastic cover from the backup batteries.

IMPORTANT: The batteries are for back up only, for daily use its recommended to use USB cabel. With LED bulbs, the digital clock consumes more power and drains out the batteries within a week.

2. PLUG USB CABLE

Put the USB cable in the alarm clock and in the wall socket.

3. DISPLAY SETTINGS

Choose the display mode. Use SET to switch from dp-1 to dp-2.

Display dp-1: Time, date and temperature successively displaying

Display dp-2: Time displaying only

4. TIME / ALARM / DATE CONTROL

Press and hold SET for 3 seconds.

When the right symbol is flashing, adjust UP and DOWN to set.

You may set: **YEAR** -> **MONTH** -> **DATE** -> **HOUR** ->
MINUTE -> **12/24H** -> **A(larm)**

It's possible to set three different alarms.

--:A1 -> **--:A2** -> **--:A3**. Each alarm lasts 1 minute.

To turn down the Alarm , press any button.

This clock has no snooze function.

5. SOUND CONTROL

Use DOWN to switch from SOUND ON to SOUND OFF.

oN:Sd = SOUND ON

-- :Sd = SOUND OFF

6. TEMPARATURE CONTROL

Use UP to switch from °C (Celsius) to °F (Fahrenheit).

