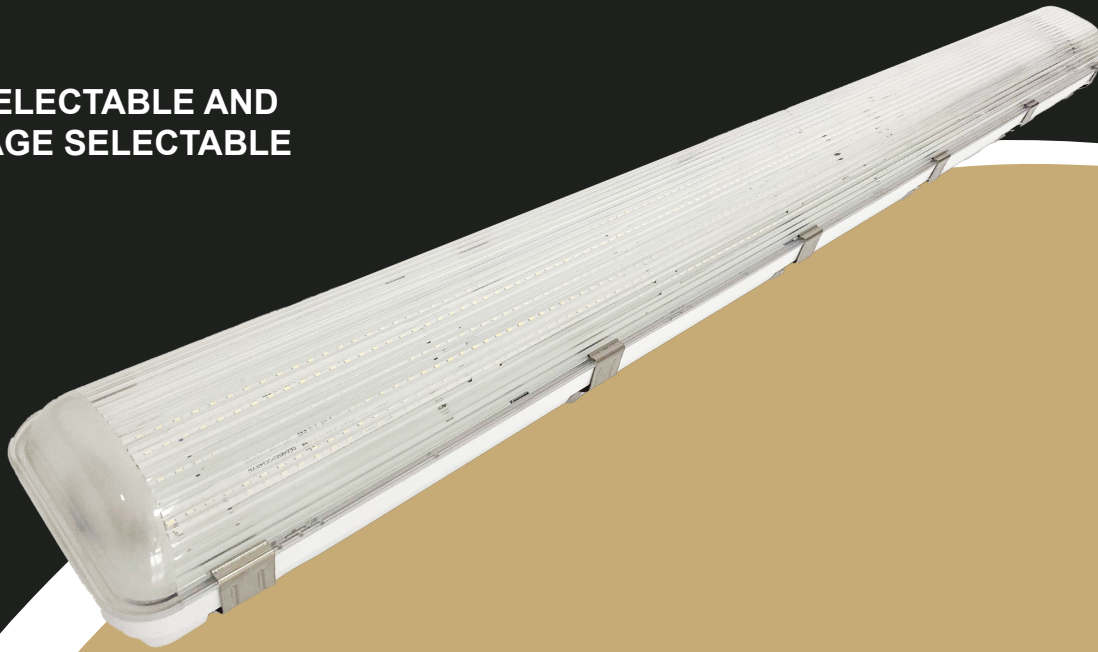


APEX**CCT SELECTABLE AND
WATTAGE SELECTABLE**

LOCK IN YOUR PRICING AND MANAGE YOUR INVENTORY FOR 2023

YOU DECIDE THE TERM • YOU DECIDE THE RELEASES • WE PAY THE FREIGHT

Certain conditions apply. For more information, contact your local LuxLogic sales agent.

Description

The **Apex** is a **CCT SELECTABLE AND WATTAGE SELECTABLE** LED linear vapour tight. It provides maximum light output with durable construction. Featuring a one piece fire-retardant polycarbonate housing and lens, the Apex was designed to meet or exceed IES recommended foot-candle levels at installed heights for parking garages, making it ideal for utility lighting, parking garages, and stairwells; where meeting applicable building and safety codes is required.

Features

Wattage selectable from 32W / 44W / 50W, with CCT Selectable options for 3000K / 4000K / 5000K. High quality polycarbonate diffuser integrated with powder coated lighting tray and stainless steel clips.

IP Rating: IP66
IK Rating: IK08
NEMA 4X Rated

Electrical Specifications

Wattage Selectable Options: 32W / 44W / 50W
CCTs: Selectable 3000K / 4000K / 5000K
Efficacy: 150 LM/W (clear lens) / 130 LM/W (frosted lens)
CRI: >80Ra
Power Factor: >0.9
0-10V Dimming
Operating Temperature: -40 ~ 50° C / -40 ~ 122°F
Available Voltages: 120-347VAC (CUNV)
Fixture comes complete with IP66 connector.

Certifications and Warranty

DLC Premium, ETL listed, and CE with 6 year warranty

PALLET QUANTITIES**50WS****90**

APEX

CCT SELECTABLE AND WATTAGE SELECTABLE

IP66 Connector Included



MOUNTING OPTIONS

CM Surface Mounting Kit (Standard) - 4'



Suspension Mounting Kit



ACCESSORIES

Emergency Battery



Microwave Sensor

