


## AURORA LINEAR SERIES

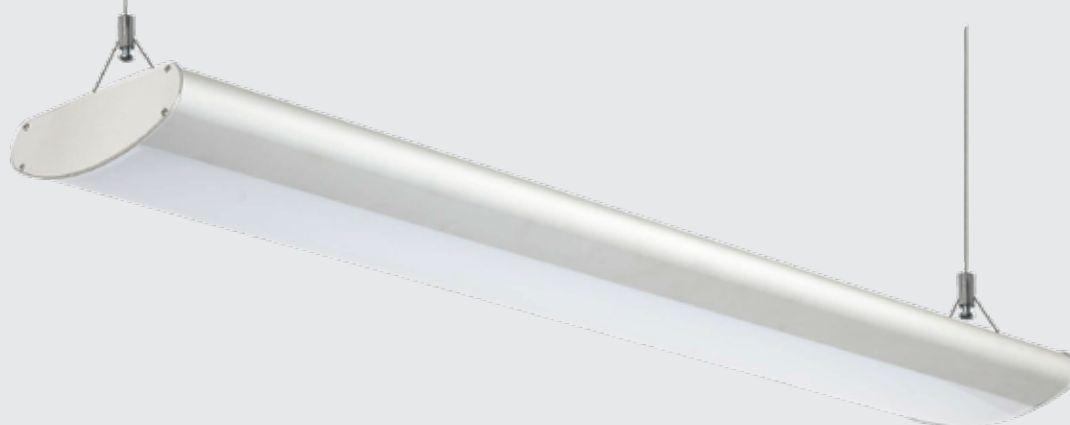

### Description

The **Aurora suspended linear LED** luminaire provides a rich downward stream of light or general ambient lighting. Simple to install and maintain system offers long life and wide colour selection to ensure a pleasant atmosphere in education facilities, storage rooms, hallways, and offices regarding performance and aesthetics. PC frost lens for soft and even lighting distribution, creating a relaxing and comfortable lighting atmosphere. Aluminum profile optimizes shipping, storage, and handling. Shallow depth provides sleek, low-profile appearance. The Aurora is available in 4 feet (40W and 50W) and 8 feet (80W) with an efficacy of 105 lumen/Watt. A continuous-run, non-seamless connector is included.

### Inspiration

Premium suspended lighting in school hallway.

### Certifications and Warranty

CE and cUL with 6 year warranty



# AURORA – 4'

## 40W/50W



Product Information	40W	50W
Installation:	Suspended	
Material:	Aluminum	
Finish:	High reflectance baked enamel	
System power (W):	40	50
Fixture lumen output (lm):	4200	5250
System efficiency (lm/W):	105	
LED driver:	Integrated	

### Light source information


LED typology:	SMD	
LED power consumption (W):	40	50
Lumen output 4000K CRI 80 (lm):	4800	6000
LED efficiency (lm/W):	120	120

### Packaging

Net weight lamp (kg/lb):	2.5 / 5.51	2.5 / 5.51
Gross weight carton (kg/lb):	6.5 / 14.33	6.5 / 14.33
Master carton dimensions (mm/in):	1260x190x290 / 49.61x7.48x11.42	
Quantity per carton:	2	2


### Code Composition

Series	Model	Size	Mounting	Luminous Ways	Wattage-Lumens
LN Linear	AU Aurora	4F 4 Feet	SP Suspended	D Down	40W-42L 40W-4200lm

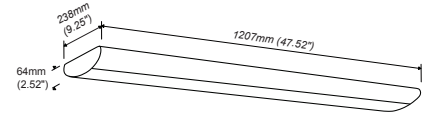


CCT	CRI	Voltage	Dimming	Finish	Accessories
30K 3000K	80 80+	UNV 120-277V	ND No dimming	WH White	NA No Accessories
35K 3500K		CHV 347-480V	D 0-10V	BK Black	CK Canopy Cover W/5ft Cable
40K 4000K				GR Grey	

### Down-4000K-CRI80

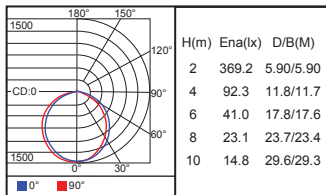


### Code Composition

Series	Model	Size	Mounting	Luminous Ways	Wattage-Lumens
LN Linear	AU Aurora	4F 4 Feet	SP Suspended	D Down	50W-52.5L 50W-5250lm

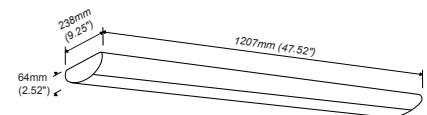

CCT	CRI	Voltage	Dimming	Finish	Accessories
30K 3000K	80 80+	UNV 120-277V	ND No dimming	WH White	NA No Accessories
35K 3500K		CHV 347-480V	D 0-10V	BK Black	CK Canopy Cover W/5ft Cable
40K 4000K				GR Grey	

### Down-4000K-CRI80

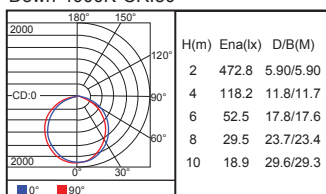

# AURORA – 8'

## 80W



### Product Information

**80W**

Installation:	Suspended
Material:	Aluminum
Finish:	High reflectance baked enamel
System power (W):	80
Fixture lumen output (lm):	8400
System efficiency (lm/W):	105
LED driver:	Integrated



### Light source information


LED typology:	SMD
LED power consumption (W):	80
Lumen output 4000K CRI 80 (lm):	9600
LED efficiency (lm/W):	120

### Packaging

Net weight lamp (kg/lb):	6.0 / 13.23
Gross weight carton (kg/lb):	13.0 / 28.66
Master carton dimensions (mm/in):	2620x190x290 / 103.15x7.48x11.42
Quantity per carton:	2


### Code Composition

Series	Model	Size	Mounting	Luminous Ways	Wattage-Lumens
LN Linear	AU Aurora	8F 8 Feet	SP Suspended	D Down	80W-84L 80W-8400lm

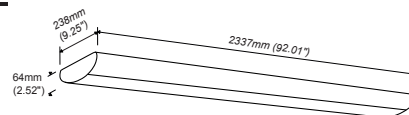


CCT	CRI	Voltage	Dimming	Finish	Accessories
30K 3000K	80 80+	UNV 120-277V	ND No dimming	WH White	NA No Accessories
35K 3500K		CHV 347-480V	D 0-10V	BK Black	CK Canopy Cover W/5ft Cable
40K 4000K				GR Grey	

### Down-4000K-CRI80

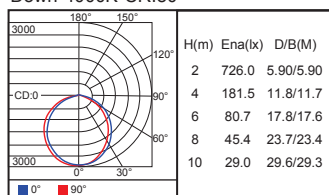


# INSTALLATION


## Installation Dimension

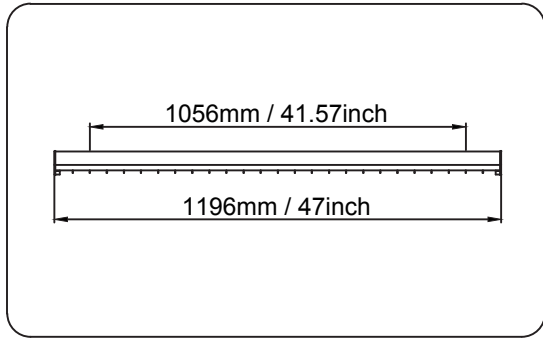



## Suspended Mounting

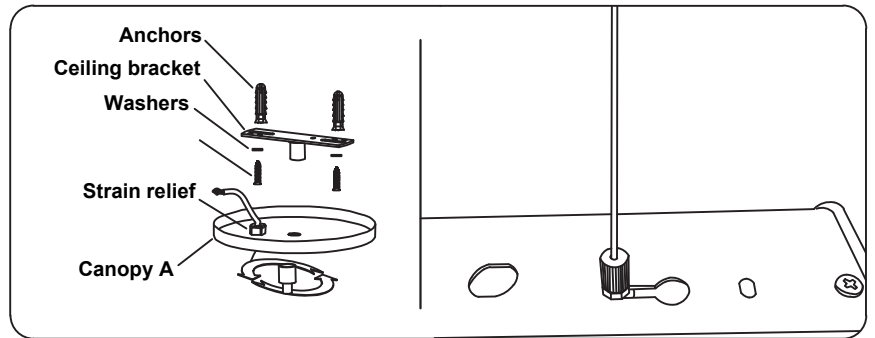

## Product Profile

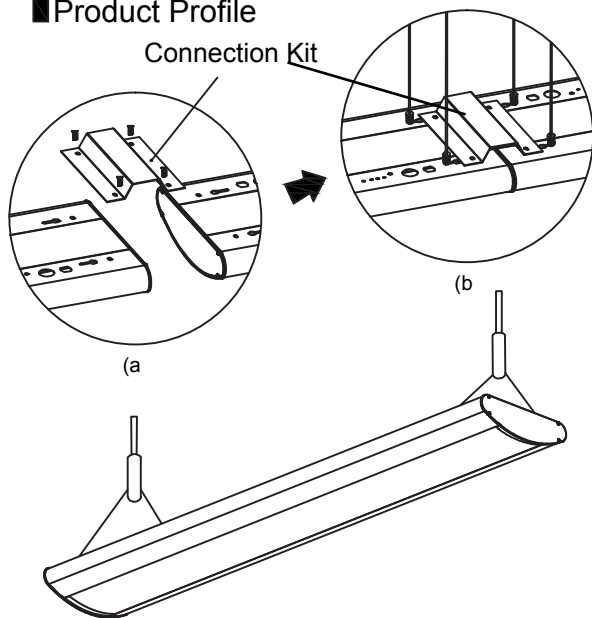

## Wiring Diagram

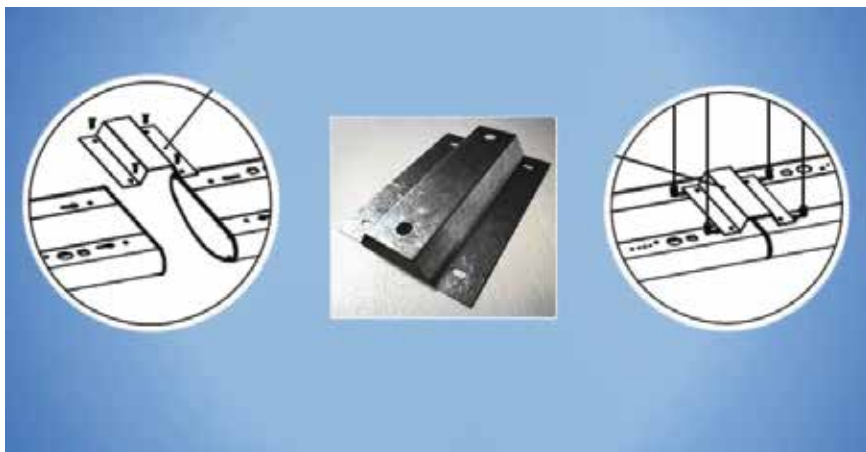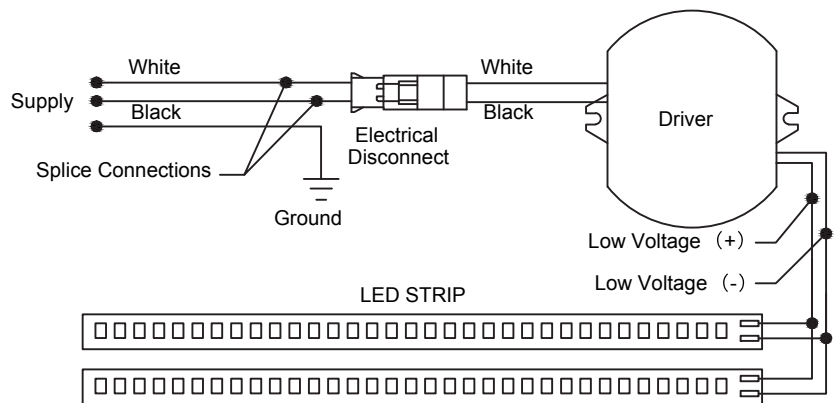

Please note that continuous run installation is not seamless.

A connector bracket (included) is required to connect fixtures, and each unit will need to be powered individually.