



BAYLUX 2

**CCT SELECTABLE AND
WATTAGE SELECTABLE**

LINEAR HIGH BAY



Description

The **Baylux 2** is a **CCT & WATTAGE SELECTABLE** LED linear high bay that is ideal for indoor environments such as warehouses, hallways, and supermarkets or other retail stores. It makes an ideal alternative to traditional HID or fluorescent luminaires in industrial, commercial, gymnasium or other applications.

Features

Available in 1' (135WS), 2' (200WS), 3' (270WS) or 4' (400WS) sizes. Translucent diffuser with 93° beam angle provides soft, even light to the environment. PIR Occupancy Sensor Socket included (PIR sensor extra). Can be surface mounted or suspended (kit included)

Electrical Specifications

Available Wattages: 130WS / 200WS / 270WS / 400WS
CCTS Selectable: 4000K / 5000K
Efficacy: 150 LM/W
Lumen Maintenance (hrs): >75,000 hrs
CRI: >80Ra
Power Factor: >0.98
Lifetime: L70 > 75000 hrs
Dimming: Continuous 0-10V Dimming
Operating Temperature: -20 ~ 50° C / -4 ~ 122°F
Available Voltages: 120-277VAC (UNV)
Input Lead Length: 18cm / 7.09"

Certifications and Warranty

DLC Premium, UL listed, and CE with 6 year warranty

Available Sizes/Wattages



1' (135WS)


2' (200WS)

3' (270WS)

4' (400WS)

BAYLUX 2 Accessories

Occupancy Sensor

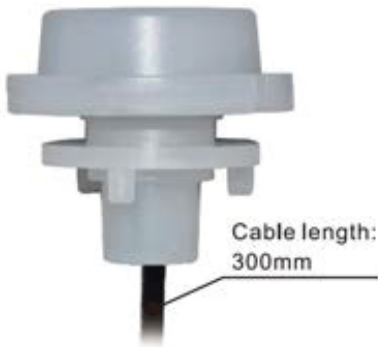

Cable length:
300mm

ANT-5-4



ANT-5-4T (sensor)



ANT-5-4B
(connecting base)

Remote Control



RC-100


Emergency Battery (EB) (External)



Output power: 15W
Emergency time: 1.5 hrs
CUNV 120V-347V

Mounting Options

Suspension kit
(included)

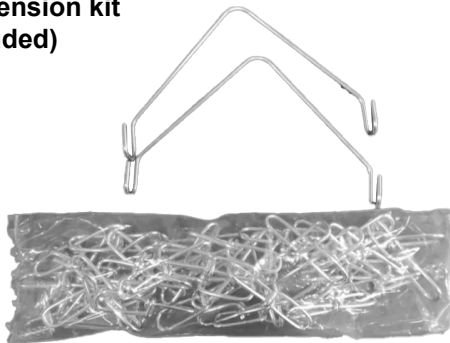

Surface Mount

