LUNA2 WATTAGE SELECTABLE



Description

The Luna2 is a WATTAGE SELECTABLE LED post top fixture. It provides a great outdoor lighting solution for a variety of applications, such as schools, streets, gardens, yards, and commercial areas. The Luna 2 is designed to provide efficient, long-lasting lighting with an ultra-thin, aesthetically pleasing design, and an IP66 rating ensures that the LED light is a convenient and practical option for those who need to complete projects with different wattage requirements. LED lights with selectable wattage are a convenient and practical option for projects with varying wattage requirements.

Features

Wattage selectable options include 30/40/50W and 100/120/150W, with CCT options for 3000K / 4000K / 5000K / 5700K. IP Rating: IP66 IK Rating: IK08 Beam Angle: 90°/ 120° / T2 / T3 / T4 / T5(140x140°) Arm Diameter: 60 - 80mm / 2.4 - 3.1" EPA: 0.462 T2/T3 BUG: B4-U1-G4 T5 BUG: B3-U0-G2

Electrical Specifications

Wattage Selectable Options: 30/40/50W | 100/120/150W CCT: 3000K / 4000K / 5000K / 5700K Efficacy: 140-160 LM/W CRI: >70Ra Power Factor: >0.9 0-10V Dimming Surge Protection: 10KV / 20KV (Optional) Operating Temperature: -40 ~ 55° C / -40 ~ 131°F Available Voltages: 120-347VAC (CUNV) 6KVA Surge Protection Standard

Certifications and Warranty

DLC Premium, ETL listed, and CE with 5 year warranty



Wattage Selectable



Pathway Lighting | S.2

LUNA2 WATTAGE SELECTABLE



Product Information	50WS (Selectable)	150WS (Selectable)	
Installation:	Slip Fitter (Standard)		
Material:	Die-cast aluminum		
Finish:	Powder coat		
System power (W):	30/40/50W	100/120/150W	
Fixture lumen output (Im):	4800/6400/8000	14000/16800/21000	
System efficiency (Im/W):	160	140	
LED driver:	Becky		
LED engine:	Lumiled 2835		


CKayı

New weight lamp (kg/lb):
Gross weight carton (kg/lb):
Master carton dimensions (mm/in):
Quantity per carton:

7.5 / 16.54 540 x 480 x 300 / 21.26 x 18.9 x 11.81


1





Code composition

Series	Mod	el	Moun	ting	Wattage-Lum	nens		Beam /	Angle	
DPT Decorati Post Top		2 Luna 2	SF	Slip Fitter (for 3" Tenon)	50WS-80L 150WS-210L	50WS-800 150WS-2		120 1 T2 1 T3 1 T4 1	00 Degrees 120 Degrees Гуре 2 Гуре 3 Гуре 4 Гуре 5	Ø488.7mm(10
ССТ	CRI		Voltage	•	Dimming	Finis	h	Acc	essories	
30K 3000K	70	Ra>70	CUNV	120-347V	D 0-10V Dimming	BK	Black	NA	No Access	ories
40K 4000K								PC	Photocell	
40K 4000K 50K 5000K										e Protection Device

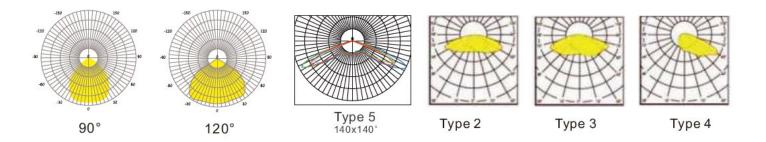



LUNA2 WATTAGE SELECTABLE

