

POOLSIDER FOR POOLS AND NATATORIUMS



Description

The **Poolsider** is a modular LED flood light specifically designed for the caustic environment of Natatoriums, but versatile enough to be used in any flood light application. Multiple optical lens choices, and rotatable modules allow a wide variety of light spread for various use both indoor and out.

Features

Salt spray anti corrosion tested to IEC60068-2-11, ISO4628-3, ASTM B117 standards for Natatorium applications. Anti-corrosive finish is standard. Available in 60W modules, each independently rotatable, featuring an aluminum cooling fin for superior heat dissipation. IP66 Rated. IK09 Rating.

Electrical Specifications

Available Wattages: 60W / 100W / 150W / 200W / 300W / 400W / 600W

CCTs: 2700K / 3000K / 4000K / 5000K / 6500K

Efficacy:

60D, 90D, 120D: 170LM/W

30D: 160 LM/W

10D: 120 LM/W

CRI: >70Ra

Power Factor: >0.95

Lifetime: L70 > 75000 hrs


Operating Temperature: -40 ~ 60° C / -40 ~ 140°F

Available Voltages: 120-277VAC UNV / 277-480V HV (Remote drivers only)
0-10V Dimming


Certifications and Warranty

DLC, cETL listed, and CE with 6 year warranty

Please see data sheet for more details

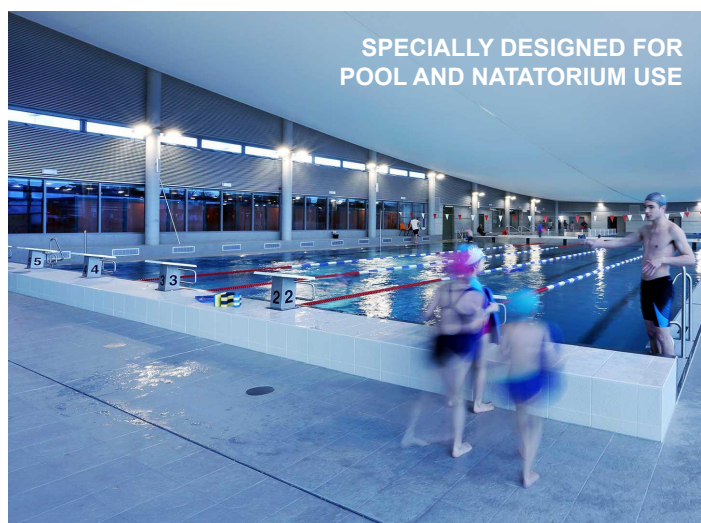

Module rotatable 90°



Arc bracket rotatable 360°