


RAINBOW UP & DOWN ACOUSTIC SERIES

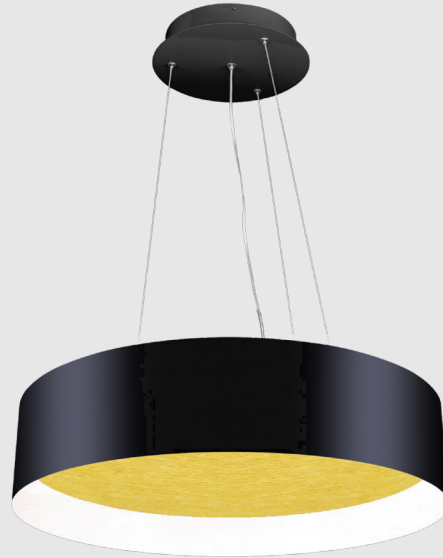

Description

Combining the elements of color, shape and light, Rainbow Series is an extremely versatile lighting tool for a range of project. Available in three sizes of 24", 35", 47", up side coming with even lighting distribution, down side incorporated with acoustic panel. It's perfectly having two colors integrated into one fixture, inside bevel and outside frame is available in different color combinations, plus 38 acoustic felt colors for option to suit your project vibe.

Long lifespan: 50,000 hours.

Thin & light design achieves high performance.

Electrical Specifications

Wattage: 20W / 40W (Up Light), Down with Acoustic Fabric

CCT: 3000K / 4000K / 5000K

Efficacy: 85 LM/W

CRI: >90Ra

Operating Temperature: -20 ~ 40° C / -4 ~ 104°F

Available Voltages: 120-277VAC (UNV)

0-10V Dimming Standard

LM80

Includes 1500mm / 59" electrical cable

Acoustic Colour Options



Mounting Options

The Rainbow Acoustic can be suspended or surface mounted. Up light and Down is Fabric.

Certifications and Warranty


ETL listed with 5 year warranty

Mounting options




Customizable Colours





20W

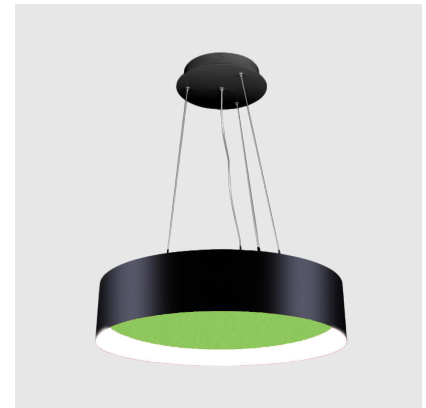


Product Information	20W (Down Acoustic / Up 20W)
Installation:	Suspended
Material:	Aluminum
Finish:	White
System power (W):	20
Fixture lumen output (lm):	1700
System efficiency (lm/W):	85

Packaging	
New weight lamp (kg/lb):	9.1 / 20.06
Gross weight carton (kg/lb):	10.9 / 24.03
Master carton dimensions (mm/in):	690 x 690 x 250 / 27.17 x 27.17 x 9.84
Quantity per carton:	1


Code composition

Series	Model	Size	Mounting	Wattage-Lumens
DR Decorative	RWAC Rainbow Acoustic	24 23.6" (600mm)	SP Suspended (standard) CM Surface	20W-17L 20W-1700lm


CCT	CRI	Voltage	Dimming	Finish	Acoustic Fabric Finish	Accessories
30K 3000K	90 90+	UNV 120-277V	D 0-10V Dimming (Standard)	WH White (Standard)	NSAC-001 141 NSAC-022 119	
40K 4000K				BK Black	NSAC-002 122 NSAC-020 128	
50K 5000K					NSAC-003 120 NSAC-025 138	

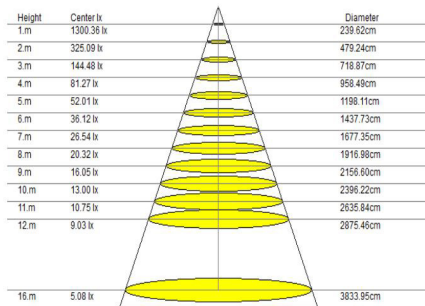

Beam Angle:100.30°(50%Imax)

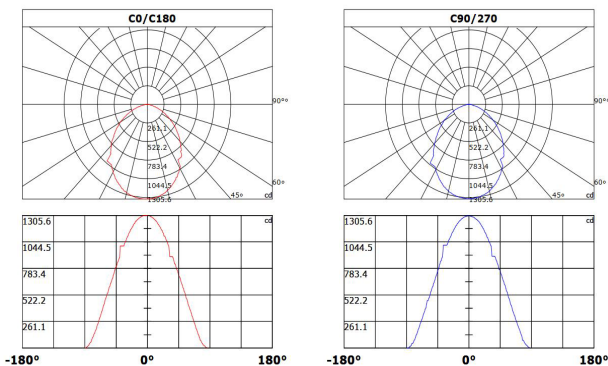

- NSAC-004 123 NSAC-031 108
- NSAC-005 107 NSAC-056 131
- NSAC-006 106 NSAC-024 117
- NSAC-007 145 NSAC-042 146
- NSAC-008 129 NSAC-043 115
- NSAC-009 140 NSAC-055 142
- NSAC-019 126 NSAC-028 110
- NSAC-011 135 NSAC-033 103
- NSAC-012 133 NSAC-034 102
- NSAC-013 111 NSAC-035 101
- NSAC-014 144 NSAC-036 105
- NSAC-021 130 NSAC-038 127
- NSAC-016 104 NSAC-039 143
- NSAC-017 147 NSAC-040 124
- NSAC-018 125 NSAC-057 132



40W



Product Information **40W (Down Acoustic / Up 40W)**

Installation:	Suspended
Material:	Aluminum
Finish:	White
System power (W):	40
Fixture lumen output (lm):	3400
System efficiency (lm/W):	85


Packaging **35.4"/900mm** **47.2"/1200mm**

New weight lamp (kg/lb):	13 / 28.66	19.1 / 42.11
Gross weight carton (kg/lb):	16.4 / 36.16	23.9 / 52.69
Master carton dimensions (mm/in):	1020 x 1020 x 280 / 40.16 x 40.16 x 11.02	1320 x 1320 x 280 / 51.97 x 51.97 x 11.02
Quantity per carton:	1	1


Code composition

Series	Model	Size	Mounting	Wattage-Lumens
DR Decorative	RWAC Rainbow Acoustic	35 35.4" (900mm)	SP Suspended (standard)	40W-34L 40W-3400lm
		47 47.2" (1200mm)	CM Surface	

CCT	CRI	Voltage	Dimming	Finish	Acoustic Fabric Finish	Accessories
30K 3000K	90 90+	UNV 120-277V	D 0-10V Dimming (Standard)	WH White (Standard)	NSAC-001 141	NSAC-022 119
40K 4000K				BK Black	NSAC-002 122	NSAC-020 128
50K 5000K					NSAC-003 120	NSAC-025 138

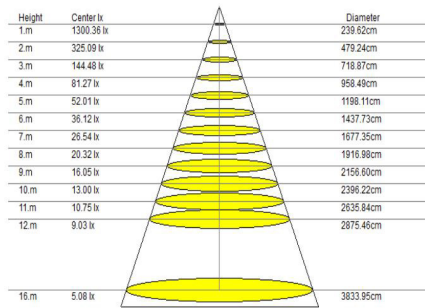


Beam Angle:100.30°(50%Imax)

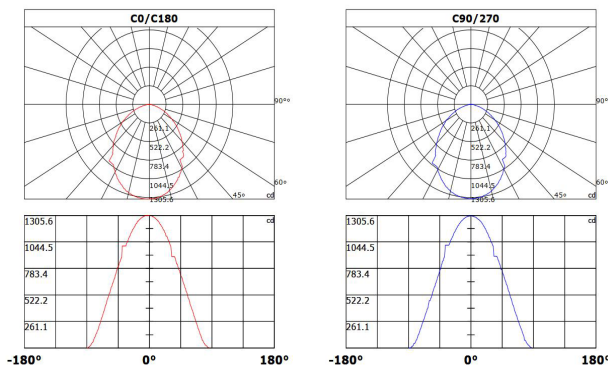

- NSAC-004 123
- NSAC-005 107
- NSAC-006 106
- NSAC-007 145
- NSAC-008 129
- NSAC-009 140
- NSAC-010 146
- NSAC-011 135
- NSAC-012 133
- NSAC-013 111
- NSAC-014 144
- NSAC-015 105
- NSAC-016 104
- NSAC-017 147
- NSAC-018 125
- NSAC-031 108
- NSAC-056 131
- NSAC-024 117
- NSAC-042 146
- NSAC-043 115
- NSAC-055 142
- NSAC-028 110
- NSAC-033 103
- NSAC-034 102
- NSAC-035 101
- NSAC-036 105
- NSAC-038 127
- NSAC-039 143
- NSAC-040 124
- NSAC-057 132

Dimensions


SP - Suspension Mount (Standard)

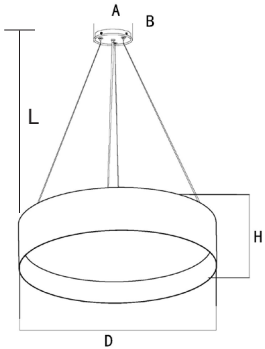

Acoustic

Model No	Dimension				
	D	H	A	B	L
20W	23.6" / 600mm	5.5" / 140mm	10.0" / 250mm	1.38" / 35mm	59" / 1500mm
40W	35.4" / 900mm		13.8" / 350mm		
40W	47.2" / 1200mm				

CM - Surface Mount

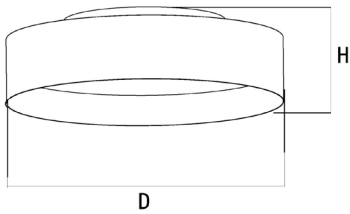

Model No	Dimension	
	D	H
20W	23.6" / 600mm	6.9" / 175mm
40W	35.4" / 900mm	
40W	47.2" / 1200mm	