

RAINBOW UP & DOWN SERIES



Description

The Rainbow Up & Down decorative lighting is a cutting edge piece that makes a design statement while still being streamlined.

Offers various colour options to make your surrounding more vivid and enable you to connect with your space. The Rainbow Up & Down fixture provides a variety of outer and inner colour combinations, feel free to experiment to find the best aesthetic for your area.

Long lifespan: 50,000 hours.

Thin & light design achieves high performance.

Mounting options



Electrical Specifications

Wattage Options:

Suspension: 80W / 120W / 220W

Surface: 80W / 120W / 150W

CCT: 3000K / 4000K / 5000K

Efficacy: 85 LM/W

CRI: >90Ra

Operating Temperature: -20 ~ 40° C / -4 ~ 104°F

Available Voltages: 120-277VAC (UNV)

0-10V Dimming Standard

LM80

Includes 1500mm / 59" electrical cable


Mounting

The Rainbow Up & Down can be suspended or surface mounted. 40% Up & 60% Down light distribution.

Certifications and Warranty

ETL listed with 5 year warranty

RAINBOW UP & DOWN SERIES 80W




Product Information	80W (Down 50W / Up 30W)
Installation:	Suspended / Surface
Material:	Aluminum
Finish:	White / Black
System power (W):	80
Fixture lumen output (lm):	6800 (4250 / 2550)
System efficiency (lm/W):	85

Packaging	
New weight lamp (kg/lb):	9.1 / 20.06
Gross weight carton (kg/lb):	10.9 / 24.03
Master carton dimensions (mm/in):	690 x 690 x 250 / 27.17 x 27.17 x 9.84
Quantity per carton:	1


Code composition

Series	Model	Size	Mounting	Wattage-Lumens
DR Decorative	RWUD Rainbow Up & Down	24 23.6" (600mm)	SP Suspended (standard) CM Surface	80W-68L 80W-6800lm

CCT	CRI	Voltage	Dimming	Finish - Exterior	Finish - Interior
30K 3000K	90 90+	UNV 120-277V	D 0-10V Dimming (Standard)	WH White	WH White
40K 4000K				BK Black	BK Black
50K 5000K					

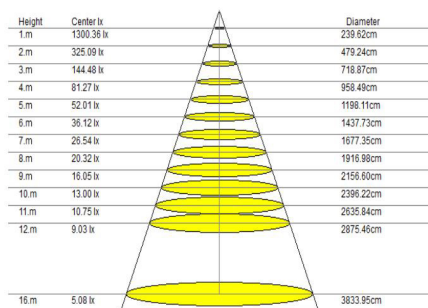


Beam Angle:100.30°(50%Imax)

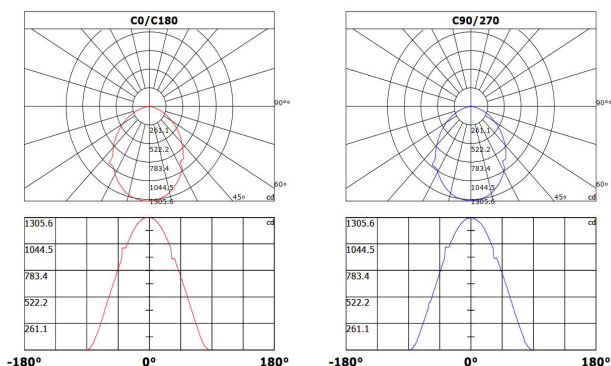

RAINBOW UP & DOWN SERIES

120W



Product Information

120W (Down 72W / Up 48W)

Installation:	Suspended / Surface
Material:	Aluminum
Finish:	White / Black
System power (W):	120
Fixture lumen output (lm):	10200 (6120 / 4080)
System efficiency (lm/W):	85


Packaging

New weight lamp (kg/lb):	13 / 28.66
Gross weight carton (kg/lb):	16.4 / 36.16
Master carton dimensions (mm/in):	1020 x 1020 x 280 / 40.16 x 40.16 x 11.02
Quantity per carton:	1


Code composition

Series	Model	Size	Mounting	Wattage-Lumens
DR Decorative	RWUD Rainbow Up & Down	35 35.4" (900mm)	SP Suspended (standard) CM Surface	120W-102L 120W-10200lm

CCT	CRI	Voltage	Dimming	Finish - Exterior	Finish - Interior
30K 3000K	90 90+	UNV 120-277V	D 0-10V Dimming (Standard)	WH White	WH White
40K 4000K				BK Black	BK Black
50K 5000K					

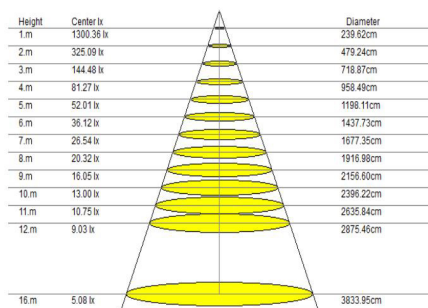


Beam Angle:100.30°(50%Imax)

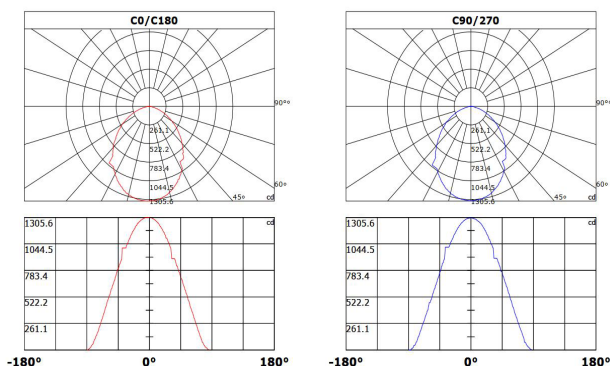

RAINBOW UP & DOWN SERIES

150W



Product Information

150W (Down 100W / Up 50W)

Installation:	Surface
Material:	Aluminum
Finish:	White / Black
System power (W):	150
Fixture lumen output (lm):	12750 (8500 / 4250)
System efficiency (lm/W):	85


Packaging

New weight lamp (kg/lb):	19.1 / 42.11
Gross weight carton (kg/lb):	23.9 / 52.69
Master carton dimensions (mm/in):	1320 x 1320 x 280 / 51.97 x 51.97 x 11.02
Quantity per carton:	1


Code composition

Series	Model	Size	Mounting	Wattage-Lumens
DR Decorative	RWUD Rainbow Up & Down	47 47.2" (1200mm)	CM Surface	150W-127.5L 150W-12750lm

CCT	CRI	Voltage	Dimming	Finish - Exterior	Finish - Interior
30K 3000K	90 90+	UNV 120-277V	D 0-10V Dimming (Standard)	WH White	WH White
40K 4000K				BK Black	BK Black
50K 5000K					

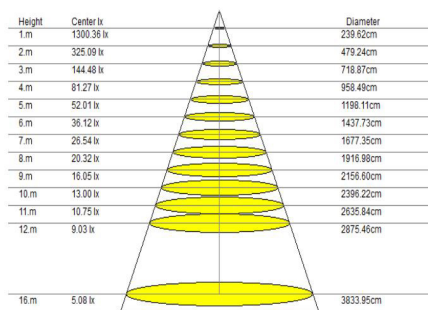


Beam Angle:100.30°(50%Imax)

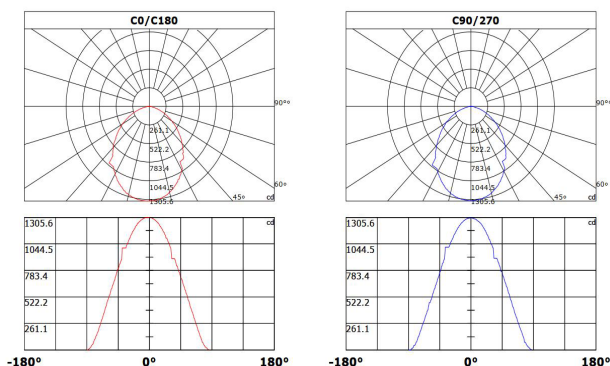

RAINBOW UP & DOWN SERIES

220W



Product Information

220W (Down 132W / Up 88W)

Installation:	Suspended
Material:	Aluminum
Finish:	White / Black
System power (W):	220
Fixture lumen output (lm):	18700 (11220 / 7480)
System efficiency (lm/W):	85


Packaging

New weight lamp (kg/lb):	19.1 / 42.11
Gross weight carton (kg/lb):	23.9 / 52.69
Master carton dimensions (mm/in):	1320 x 1320 x 280 / 51.97 x 51.97 x 11.02
Quantity per carton:	1


Code composition

Series	Model	Size	Mounting	Wattage-Lumens
DR Decorative	RWUD Rainbow Up & Down	47 47.2" (1200mm)	SP Suspended (standard)	220W-187L 220W-18700lm

CCT	CRI	Voltage	Dimming	Finish - Exterior	Finish - Interior
30K 3000K	90 90+	UNV 120-277V	D 0-10V Dimming (Standard)	WH White	WH White
40K 4000K				BK Black	BK Black
50K 5000K					

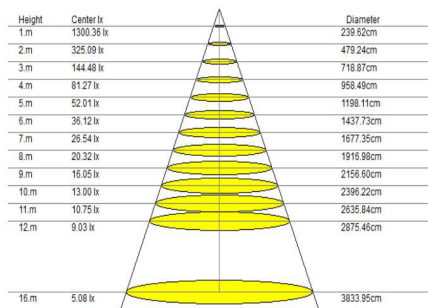


Beam Angle:100.30°(50%Imax)

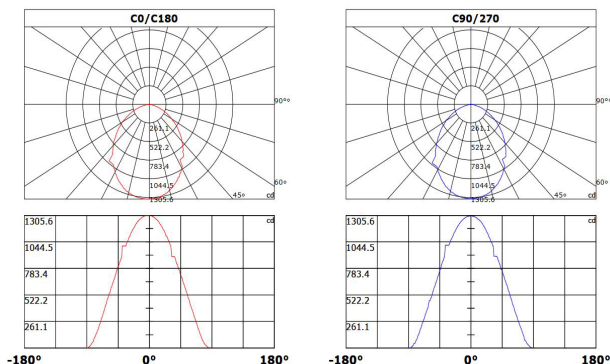


Dimensions

SP - Suspension Mount (Standard)

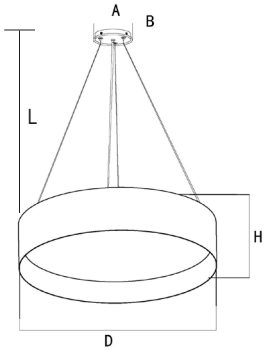

Model No	Dimension				
	D	H	A	B	L
80W	23.6" / 600mm	5.5" / 140mm	10.0" / 250mm	1.38" / 35mm	59" / 1500mm
120W	35.4" / 900mm		13.8" / 350mm		
220W	47.2" / 1200mm		17.7" / 450mm		

CM - Surface Mount

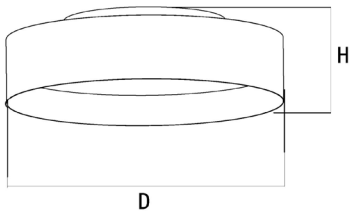

Model No	Dimension	
	D	H
80W	23.6" / 600mm	6.9" / 175mm
120W	35.4" / 900mm	
150W	47.2" / 1200mm	