

RING DOWN SERIES



Description

The Ring Down series features an aluminum housing with polycarbonate lens. It's modern design sensibilities make it ideal for hotels, reception, shopping malls, or other contemporary environments.

Electrical Specifications


Wattage Options: 40W / 50W / 80W / 100W / 120W / 200W / 400W
 CCT: 3000K / 3500K / 4000K / 5000K
 Efficacy: 85 LM/W
 CRI: >90Ra
 Operating Temperature: -20 ~ 40° C / -4 ~ 104°F
 Available Voltages: 120-277VAC (UNV)
 0-10V Dimming Standard
 LM80
 Includes 1500mm / 59" electrical cable

Customizable Colours

Blk / Wh / Silver Options



Applications


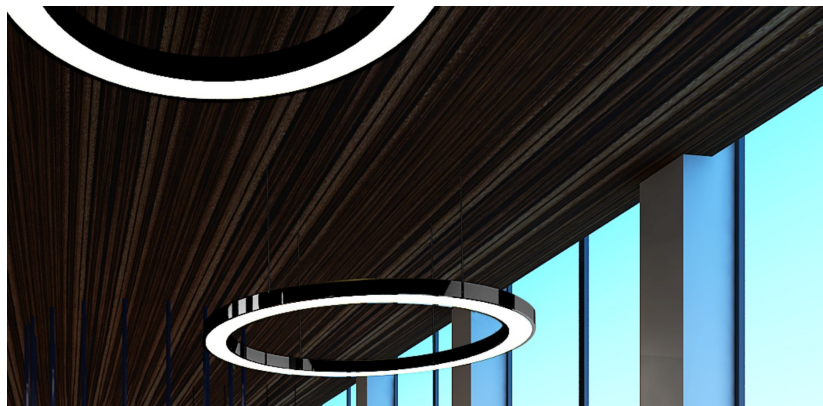


Certifications and Warranty

ETL listed with 5 year warranty

RING DOWN SERIES

40W

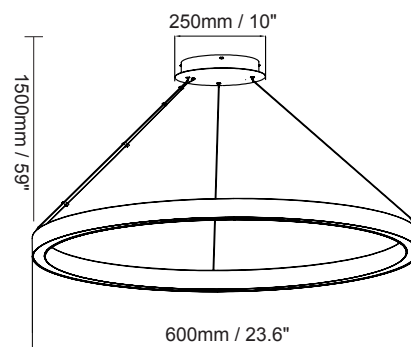

Product Information

40W

Installation:	Suspended
Material:	Aluminum
Finish:	White
System power (W):	40
Fixture lumen output (lm):	3400
System efficiency (lm/W):	85

Packaging



Net weight lamp (kg/lb):	4.1 / 9.04
Gross weight carton (kg/lb):	6.3 / 13.89
Master carton dimensions (mm/in):	690x690x160 / 27.17x27.17x6.30
Quantity per carton:	1

Code composition

Series	Model	Size	Mounting	Wattage-Lumens
DR	Decorative RD	Ring Down 24 24" (609.6mm)	SP Suspended (standard)	40W-34L 40W-3400lm
			CM Surface	

CCT	CRI	Voltage	Dimming	Fixture Finish	Accessories
30K 3000K	90 90+	UNV 120-277V	D 0-10V Dimming (Standard)	WH White (Standard)	
35K 3500K				BK Black	
40K 4000K				SL Silver	
50K 5000K					

RING DOWN SERIES 50W

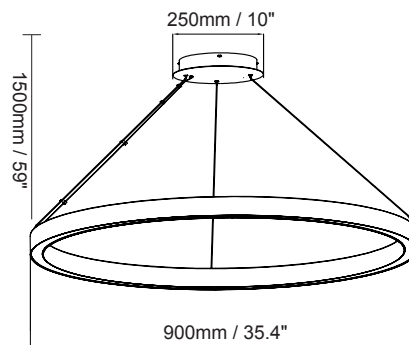

Product Information

50W

Installation:	Suspended
Material:	Aluminum
Finish:	White
System power (W):	50
Fixture lumen output (lm):	4250
System efficiency (lm/W):	85

Packaging

Net weight lamp (kg/lb):	5.4 / 11.91
Gross weight carton (kg/lb):	8.8 / 19.40
Master carton dimensions (mm/in):	990x990x160 / 38.97x38.97x6.30
Quantity per carton:	1



Code composition

Series	Model	Size	Mounting	Wattage-Lumens
DR Decorative	RD Ring Down	35 35.4" (609.6mm)	SP Suspended (standard)	50W-42.5L 50W-4250lm
			CM Surface	

CCT	CRI	Voltage	Dimming	Fixture Finish	Accessories
30K 3000K	90 90+	UNV 120-277V	D 0-10V Dimming (Standard)	WH White (Standard)	
35K 3500K				BK Black	
40K 4000K				SL Silver	
50K 5000K					

RING DOWN SERIES

80W

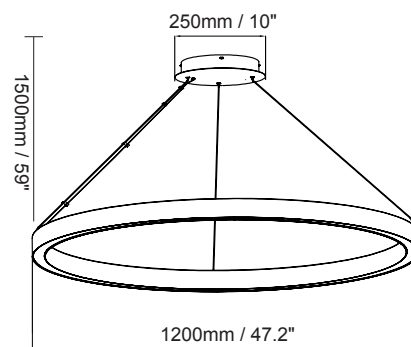

Product Information

80W

Installation:	Suspended
Material:	Aluminum
Finish:	White
System power (W):	80
Fixture lumen output (lm):	6800
System efficiency (lm/W):	85

Packaging


Net weight lamp (kg/lb):	7.0 / 15.43
Gross weight carton (kg/lb):	11.1 / 24.47
Master carton dimensions (mm/in):	1290x1290x160 / 50.79x50.79x 6.30
Quantity per carton:	1

Code composition

Series	Model	Size	Mounting	Wattage-Lumens
DR Decorative	RD Ring Down	47 47" (1200mm)	SP Suspended (standard)	80W-68L 80W-6800lm
			CM Surface	

CCT	CRI	Voltage	Dimming	Fixture Finish	Accessories
30K 3000K	90 90+	UNV 120-277V	D 0-10V Dimming (Standard)	WH White (Standard)	
35K 3500K				BK Black	
40K 4000K				SL Silver	
50K 5000K					

RING DOWN SERIES 100W

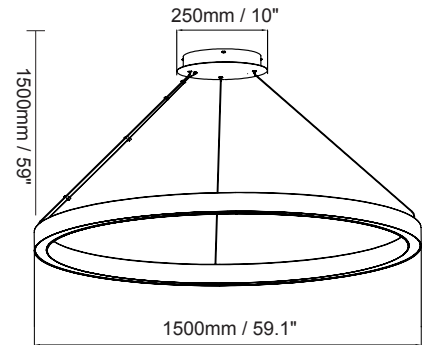

Product Information

100W

Installation:	Suspended
Material:	Aluminum
Finish:	White
System power (W):	100
Fixture lumen output (lm):	8500
System efficiency (lm/W):	85

Packaging

Net weight lamp (kg/lb):	8.3 / 18.30
Gross weight carton (kg/lb):	12.2 / 26.90
Master carton dimensions (mm/in):	1590x1590x160 / 62.60x62.60x6.30
Quantity per carton:	1


Code composition

Series	Model	Size	Mounting	Wattage-Lumens
DR	Decorative RD Ring Down	59 59" (1500mm)	SP Suspended (standard) CM Surface	100W-85L 100W-8500lm

CCT	CRI	Voltage	Dimming	Fixture Finish	Accessories
30K 3000K	90 90+	UNV 120-277V	D 0-10V Dimming (Standard)	WH White (Standard)	
35K 3500K				BK Black	
40K 4000K				SL Silver	
50K 5000K					

RING DOWN SERIES

120W



Product Information

120W


Installation:	Suspended
Material:	Aluminum
Finish:	White
System power (W):	120
Fixture lumen output (lm):	10200
System efficiency (lm/W):	85

Packaging

Net weight lamp (kg/lb):	12.0 / 26.46
Gross weight carton (kg/lb):	16.7 / 36.82
Master carton dimensions (mm/in):	1770x1358x140 / 69.69x53.46x5.51
Quantity per carton:	1


Code composition

Series	Model	Size	Mounting	Wattage-Lumens
DR	Decorative RD	Ring Down 79 79" (2000mm)	SP Suspended (standard) CM Surface	120W-102L 120W-10200lm

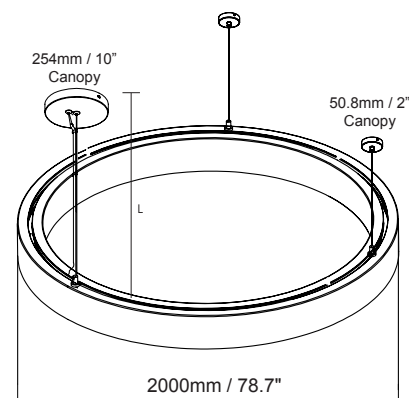

CCT	CRI	Voltage	Dimming	Fixture Finish
30K 3000K	90 90+	UNV 120-277V	D 0-10V Dimming (Standard)	WH White (Standard)
35K 3500K				BK Black
40K 4000K				SL Silver
50K 5000K				

RING DOWN SERIES 200W



Product Information

200W


Installation:	Suspended
Material:	Aluminum
Finish:	White
System power (W):	200
Fixture lumen output (lm):	17000
System efficiency (lm/W):	85

Packaging

Net weight lamp (kg/lb):	17.3 / 38.14
Gross weight carton (kg/lb):	25.7 / 56.66
Master carton dimensions (mm/in):	1820x1420x140 / 71.65x55.91x5.51
Quantity per carton:	1


Code composition

Series	Model	Size	Mounting	Wattage-Lumens
DR	Decorative RD	Ring Down 118 118.1" (3000mm)	SP Suspended (standard) CM Surface	200W-170L 200W-17000lm

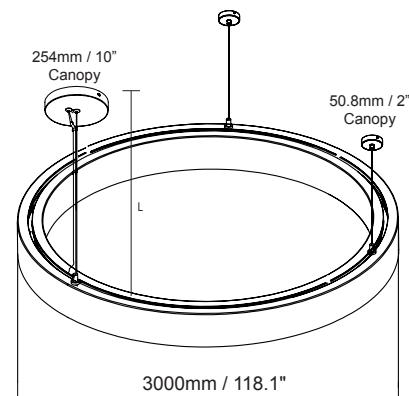

CCT	CRI	Voltage	Dimming	Fixture Finish
30K 3000K	90 90+	UNV 120-277V	D 0-10V Dimming (Standard)	WH White (Standard)
35K 3500K				BK Black
40K 4000K				SL Silver
50K 5000K				

RING DOWN SERIES 400W



Product Information

400W


Installation:	Suspended
Material:	Aluminum
Finish:	White
System power (W):	400
Fixture lumen output (lm):	34000
System efficiency (lm/W):	85

Packaging

Net weight lamp (kg/lb):	27.3 / 60.19
Gross weight carton (kg/lb):	36.6 / 80.69
Master carton dimensions (mm/in):	2600x970x140 / 102.36x38.19x5.51
Quantity per carton:	1

Code composition




Series	Model	Size	Mounting	Wattage-Lumens
DR	Decorative RD	Ring Down 197 196.9" (5000mm)	SP Suspended (standard) CM Surface	400W-340L 400W-34000lm

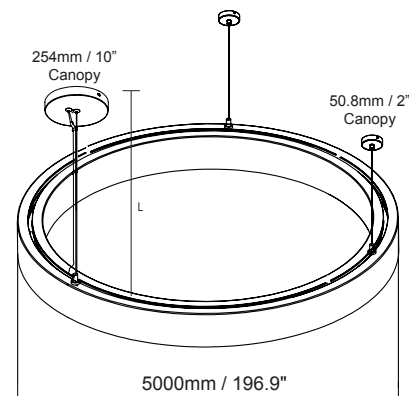

CCT	CRI	Voltage	Dimming	Fixture Finish
30K 3000K	90 90+	UNV 120-277V	D 0-10V Dimming (Standard)	WH White (Standard)
35K 3500K				BK Black
40K 4000K				SL Silver
50K 5000K				

RING DOWN SERIES

DIMENSIONS

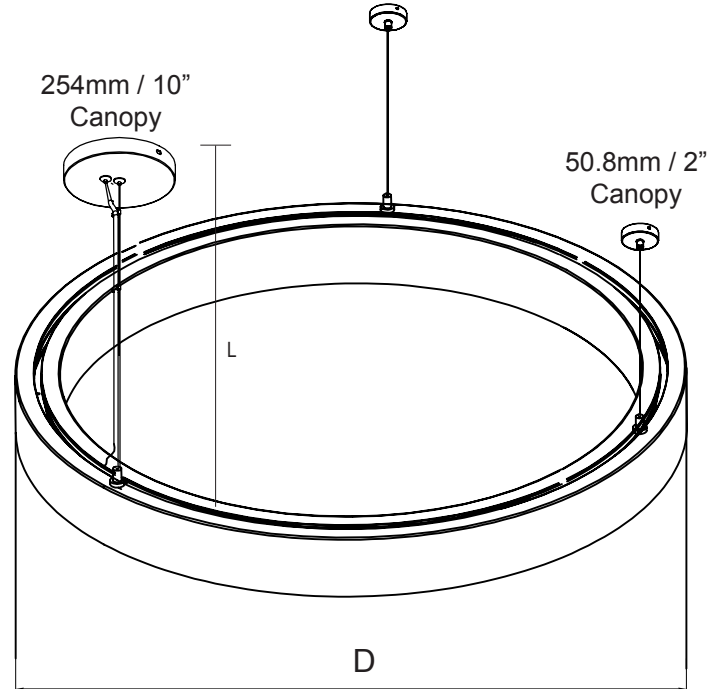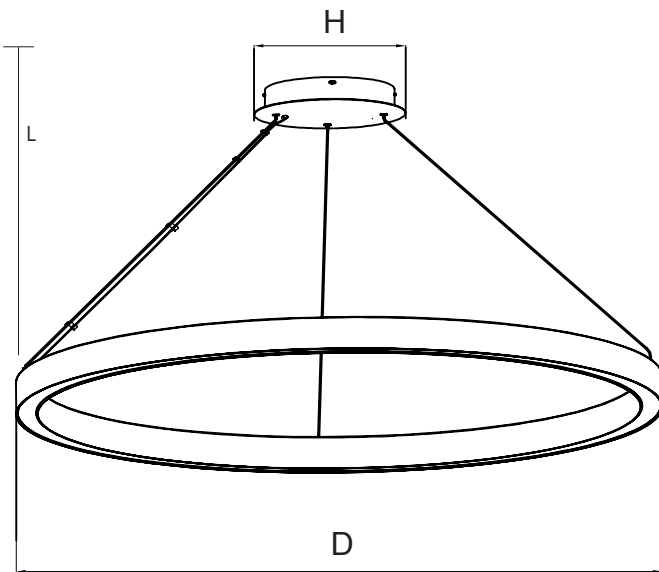

Model No	Dimension				
	Size(mm) D*W*H	Size(inch) D*W*H	D	H (Canopy)	L
40W	D600*32*38	D23.6"*1.3*1.5	23.6" / 600mm	10" / 250mm	59" / 1500mm
50W	D900*32*38	D35.4"*1.3*1.5	35.4" / 900mm		
80W	D1200*32*38	D47.2"*1.3*1.5	47.2" / 1200mm		
100W	D1500*32*38	D59.1"*1.3*1.5	59.1" / 1500mm		
120W	D2000*32*38	D78.7"*1.3*1.5	78.7" / 2000mm		
200W	D3000*32*38	D118.1"*1.3*1.5	118.1" / 3000mm		
400W	D5000*32*38	D196.9"*1.3*1.5	196.9" / 5000mm		