VEGA LINEAR SERIES



Description

The Vega suspended linear LED comes with aluminum parabolic louver locked by four clamping springs with tool-less design, that brings a functional yet relaxing atmosphere to offices, retails, or restaurants. Engineered to deliver up to 10,000 lumen, the Vega has several options to answer all consumers needs regarding performance and b aesthetics.

storage, and handling.
Shallow depth provides sleek,
lowprofile appearance.


Vega available in 4 feet (40W and
50W) and 8 feet (80W and 100W) with
an efficacy of 110 lumen/Watt. A
continuous-run, non-seamless
connector is included.

Aluminum profile optimizes shipping,

Applications

Closets, storage rooms, offices, conference rooms, retail, reception areas, hallways, education facilities.

Certifications and WarrantyCE and cUL with 6 year warranty






VEGA - 4' 40W/50W







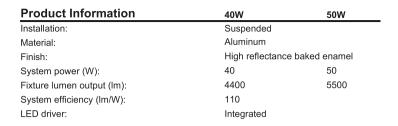



Light source information

| LED typology: | SMD | |
|---------------------------------|------|------|
| LED power consumption (W): | 40 | 50 |
| Lumen output 3000K CRI 80 (Im): | 4800 | 6000 |
| LED efficiency (Im/W): | 120 | 120 |

Packaging

| Net weight lamp (kg/lb): | 2.5 / 5.51 | 2.5 / 5.51 | | |
|-----------------------------------|--------------------------------|-------------|--|--|
| Gross weight carton (kg/lb): | 6.5 / 14.33 | 6.5 / 14.33 | | |
| Master carton dimensions (mm/in): | 1260x190x290 / 49.61x7.48x11.4 | | | |
| Quantity per carton: | 2 | 2 | | |


Code Composition

| Series | Model | Size | Mounting | Luminous Ways | Wattage-Lumens | | |
|-----------|---------|------------------|--------------|---------------|----------------|------------|---|
| IN Linear | VF Vega | 4F 4 Feet | SP Suspended | D Down | 40W-44I | 40W-4400lm | _ |




| CCT | | CR | 1 | Volta | age | Din | nming | Finish | - | Accessories |
|-----|-------|----|-----|-------|----------|-----|------------|----------------|-----|-----------------------------|
| 30K | 3000K | 80 | 80+ | UNV | 120-277V | ND | No dimming | WH Whit | e 1 | NA No Accessories |
| 35K | 3500K | | | CHV | 347-480V | D | 0-10V | BK Blac | ((| CK Canopy Cover W/5ft Cable |
| 40K | 4000K | | | | | | | GR Grey | | |

Down-4000K-CRI80




Code Composition

| Series | Model | Size | Mounting | Luminous Ways | Wattage-Lumens | | |
|-------------|---------|------------------|--------------|----------------------|----------------|------------|--|
| I M. Linear | VE Vega | /F / Foot | SD Suspended | D Down | 50W-55I | 50W-5500lm | |



| CCT | | CRI | | Volta | ige | Dimming Finish | | nish | Acce | essories | |
|-----|-------|-----|-----|-------|----------|----------------|------------|------|---------|----------|--------------------------|
| 30K | 3000K | 80 | +08 | UNV | 120-277V | ND | No dimming | WH | I White | NA | No Accessories |
| 35K | 3500K | | | CHV | 347-480V | D | 0-10V | ВК | Black | CK | Canopy Cover W/5ft Cable |
| 40K | 4000K | | | | | | | GF | Grev | | |

Down-4000K-CRI80





VEGA - 8' 80W/100W









Product Information 80W 100W Installation: Suspended Material: Aluminum Finish: High reflectance baked enamel System power (W): 80 100 Fixture lumen output (Im): 8800 11000

Light source information

System efficiency (lm/W):

| LED typology: | SMD | |
|---------------------------------|------|-------|
| LED power consumption (W): | 80 | 100 |
| Lumen output 3000K CRI 80 (lm): | 9600 | 12000 |
| LED efficiency (Im/W): | 120 | 120 |

110

Integrated

Packaging

LED driver:

| Net weight lamp (kg/lb): | 6.0 / 13.23 | 6.5 / 14.33 | | | |
|-----------------------------------|------------------------------|--------------|--|--|--|
| Gross weight carton (kg/lb): | 13.0 / 28.66 | 14.3 / 31.53 | | | |
| Master carton dimensions (mm/in): | 2620x190x290 / 103.15x7.48x1 | | | | |
| Quantity per carton: | 2 | 2 | | | |


Code Composition

| Series | Model | Size | Mounting | Luminous Ways | Wattage-Lumens | | |
|-----------|----------------|------------------|--------------|---------------|--------------------|--|--|
| LN Linear | VE Vega | 8F 8 Feet | SP Suspended | D Down | 80W-88L 80W-8800lm | | |



| CCT | CCT CRI | | Voltage | | Dimming | | Finish | | Accessories | | | | |
|-----|---------|----|---------|-----|----------|----|------------|---------------|-------------|----|-------|---------------------|---|
| 30K | 3000K | 80 | +08 | UNV | 120-277V | ND | No dimming | WH Wh | ite | NA | No A | ccessories | |
| 35K | 3500K | | | CHV | 347-480V | D | 0-10V | BK Bla | ck | CK | Canop | by Cover W/5ft Cabl | е |
| 40K | 4000K | | | | | | | GR Gre | y | | | | |

Down-4000K-CRI80




Code Composition

| Series | Model | Size | Mounting | Luminous Ways | Wattage-Lumens |
|-----------|----------------|-----------|--------------|---------------|------------------------|
| LN Linear | VE Vega | 8F 8 Feet | SP Suspended | D Down | 100W-110L 100W-11000lm |



| ССТ | | CR | 1 | Volta | ige | Din | nming | Fir | iish | Acce | ssories |
|-----|-------|----|-----|-------|----------|-----|------------|-----|----------------|------|--------------------------|
| 30K | 3000K | 80 | +08 | UNV | 120-277V | ND | No dimming | WH | I White | NA | No Accessories |
| 35K | 3500K | | | CHV | 347-480V | D | 0-10V | ВК | Black | CK | Canopy Cover W/5ft Cable |
| 40K | 4000K | | | | | | | GR | Grev | | |


Down-4000K-CRI80






INSTALLATION

Installation Dimension





Suspended Mounting

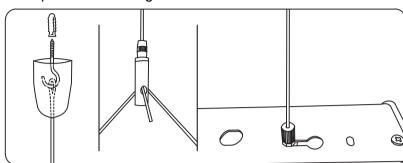

Product Profile Connection Kit (a) (b)

■ Wiring Diagram

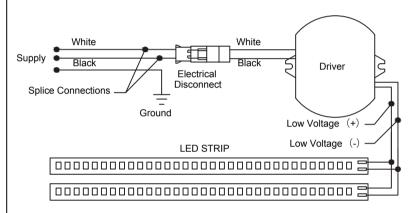

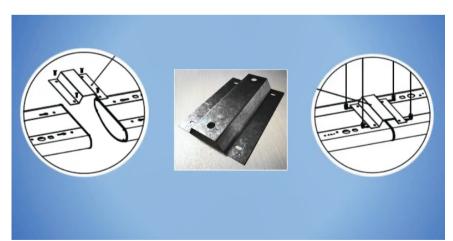

Please note that continuous run installation is not seamless.

A connector bracket (included) is required to connect fixtures, and each unit will need to be powered individually.

