

## WAVE



### Description

The **Wave Panel** offers a field customizable LED back lighting solution. The flexible panel can be folded and shaped to suit project needs. Versatile design to use in both indoor and outdoor applications. Choice of colour temperatures with dimming using appropriate driver.


Pre-affixed 3M mounting tape on reverse. 1m (39.37") lead wire and 95mm jumper cable included per sheet. 2-Pin connection blocks per sheet located for easy connection.

### Electrical Specifications

Available Wattages: 12W / sheet  
 CCT Selectable: 2200K / 2700K / 3000K / 3500K / 4000K / 5000K / 6000K  
 Efficacy: 80 LM/W  
 Lumen Maintenance (hrs): >50,000 hours  
 CRI: >90Ra  
 IP Rating: IP54  
 0-10V Dimming  
 Operating Temperature: -20°C to 60°C/ -4°F to 140°F  
 Available Voltages: 120-277VAC (UNV)

### Certifications and Warranty

cULus and CE with 5 year warranty

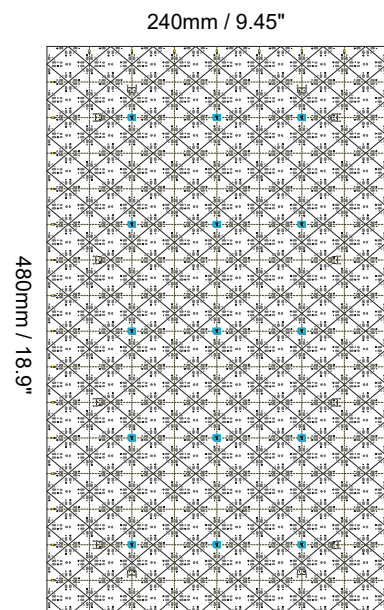

# WAVE



## Product Information

12W

Installation:	3M Tape mounted
Material:	
Finish:	NA
System power (W):	12W
Fixture lumen output (lm):	1100 (@ 5000K)
System efficiency (lm/W):	80
LED driver:	
LED engine:	



## Packaging

Net weight lamp (kg/lb):	0.138 / 0.3
Gross weight carton (kg/lb):	
Master carton dimensions (mm/in):	
Quantity per carton:	

## Code composition

Series	Model	Mounting	Wattage-Lumens
DR	Decorative	WP Wave Panel	3T 3M Tape Mounting
			12W-11L 12W-1100lm

CCT	CRI	Voltage
22K	2200K	90 90+ UNV 120-277V IP54 Connector is included
27K	2700K	
30K	3000K	
35K	3500K	
40K	4000K	
50K	5000K	
60K	6000K	

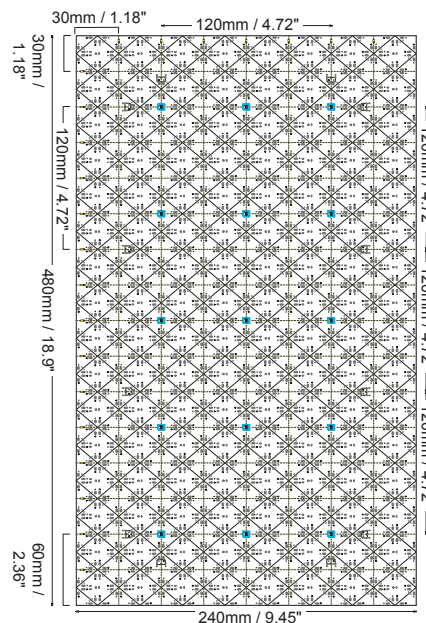

Lead cable - 1000mm / 39.37"



Jumper cable - 95mm / 3.74"