

year



Save time

SC 98.x0 pro

[paladin 179 6x0 pro]

- 1, 2, 3, or 4 channels
- Daily, weekly and yearly program
- 300 memory locations
- 10 years battery-reserve
- Minimum interval 1 min.
- Switching capacity 16 A per channel
- Up to 300 permanent switchings by date
- Manual permanent mode
- Manual override
- Automatic sorting of switching times on readout
- Unrestricted block programming
- Fully automatic daylight saving time
- Elapsed time and pulse counter
- Pulse function
- Cycle function
- Timer function
- External input function
- Channel button function
- DCF function
- Security by PIN-Code
- Illuminated display
- Data-key function

Further information / Accessory

Accessory: Data-key DK pro and Programming package PP 50 pro / PP 60 pro
(not included in delivery of the time switch)



Accessory: Radio receiver DCF-Time FU 20.00 pro
(not included in delivery of the time switch)



Accessory: Radio receiver GPS-Time FU 3x.00 pro
(not included in delivery of the time switch)



Accessory: Mini terminal box 4PLE – 70 mm, for wall mounting
(not included in delivery of the time switch)

Highlights



- Yearly program with Easter function, Weekday function and Extra-switching-time function
- Up to 300 permanent switchings by date or with Easter function
- Text based menu and self-explanatory symbols
- Display with a large dot matrix area to provide two high resolution text lines
- Easy handling. Quick and intuitive programmable time switch
- Can be programmed with supply disconnected
- Unlimited program security by E²-PROM
- Programmable with PC (Accessory Data-key DK pro and Programming package PP 50 pro / PP 60 pro)

basic extended premium


Digital time switches SC 98.x0 pro

for DIN-rail mounting


[paladin 179 6x0 pro]

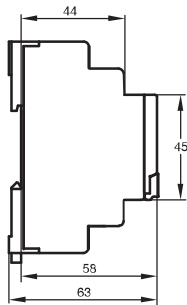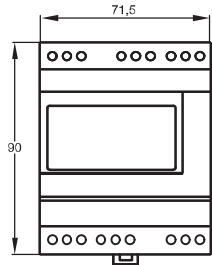


SC 98.10 pro / paladin 179 610 pro (1 channel)

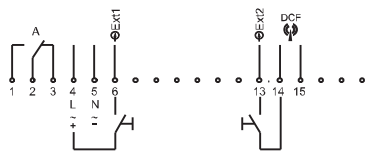


SC 98.20 pro / paladin 179 620 pro (2 channels)

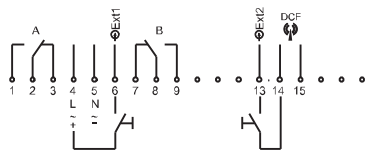

SC 98.30 pro / paladin 179 630 pro (3 channels)

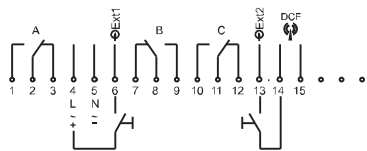

SC 98.40 pro / paladin 179 640 pro (4 channels)

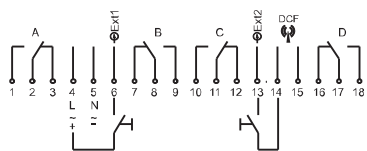

Technical data

Supply voltages	230 V, 50–60 Hz other voltages on request
Power consumption (real power)	1.2–3.2 W (depending on the switching status)
Channels (potential-free)	Change-over, contact gap < 3 mm (μ)
Contact material	AgSnO ₂
Switching capacity per channel	16 A / 250 V~ at cosφ=1 10 A with inductive load cosφ=0.6
Min. switching power	1,000 mW (10 V / 10 mA)
Max. starting current	50 A
Filament Lamp, Halogen Lamp	2,000 W
Fluorescent Lamp uncompensated	1,000 VA
Fluorescent Lamp series compensated	1,000 VA
Fluorescent Lamp parallel compensated	550 VA
LED (230 V~) / CFL	200 W
Switching functions	ON; OFF; pulse; cycle; yearly program
Pulse length Pulse function (switching time)	00:01 up to 59:59 mm:ss
Pulse length Timer (man. switching)	0:00:01 up to 9:59:59 h:mm:ss
Pulse/Pause length Cycle	0:00:01 up to 9:59:59 h:mm:ss
Memory locations	300
Minimum interval	1 min.
Time base	Quartz or DCF / GPS (FU 20.00 pro / FU 3x.00 pro)
Quartz accuracy (at 20°C)	≤ ±0.5 sec./day (Quartz accuracy optimized for typical ambient conditions)
Power back-up (at 20°C)	approx. 10 years (depends on the Lithium-battery life)
Program security	unlimited (E ² -PROM)
Display	high resolution LCD (visible area 12.8 cm ²)
Permitted ambient temperature	–30°...+55°C
Housing	self-extinguishing thermoplastic
Dimensions	45 x 71,5 x 58 mm
Mounting	35 mm DIN-rail
Type of connection	Screw terminals (Pull-up type)
Type of protection	IP 20 to DIN EN 60529
Class of protection	II when installed according to regulations
Mode of operation (DIN EN 60730-1)	1 BSTU
Degree of contamination (DIN EN 60730-1)	2
Rated surge voltage (DIN EN 60730-1)	4 kV
Accessories (not included in delivery)	Data-key DK pro, Radio receiver FU 20.00 pro / FU 3x.00 pro, Programming package PP 50 pro / PP 60 pro, Mini terminal box 4PLE
Certification mark	VDE

Order number	Channels	Time base	Special function
SC 98.10 pro / paladin 179 610 pro	1	Quartz/DCF	External input, yearly program
SC 98.20 pro / paladin 179 620 pro	2	Quartz/DCF	External input, yearly program
SC 98.30 pro / paladin 179 630 pro	3	Quartz/DCF	External input, yearly program
SC 98.40 pro / paladin 179 640 pro	4	Quartz/DCF	External input, yearly program

↙ Housing colour