

Test Report

Client:emc

Distance:

Model:

Operator:

Serial No:

Test Site:

EUT:

Temperature: °C


Humidity: %

Power: V/ Hz

Condition:

Memo:

Ref: 96.99 dBuV/m Scale: 10 dB/ Att: 0 dB Data: 2021-03-08 Time: 13 : 17 : 19

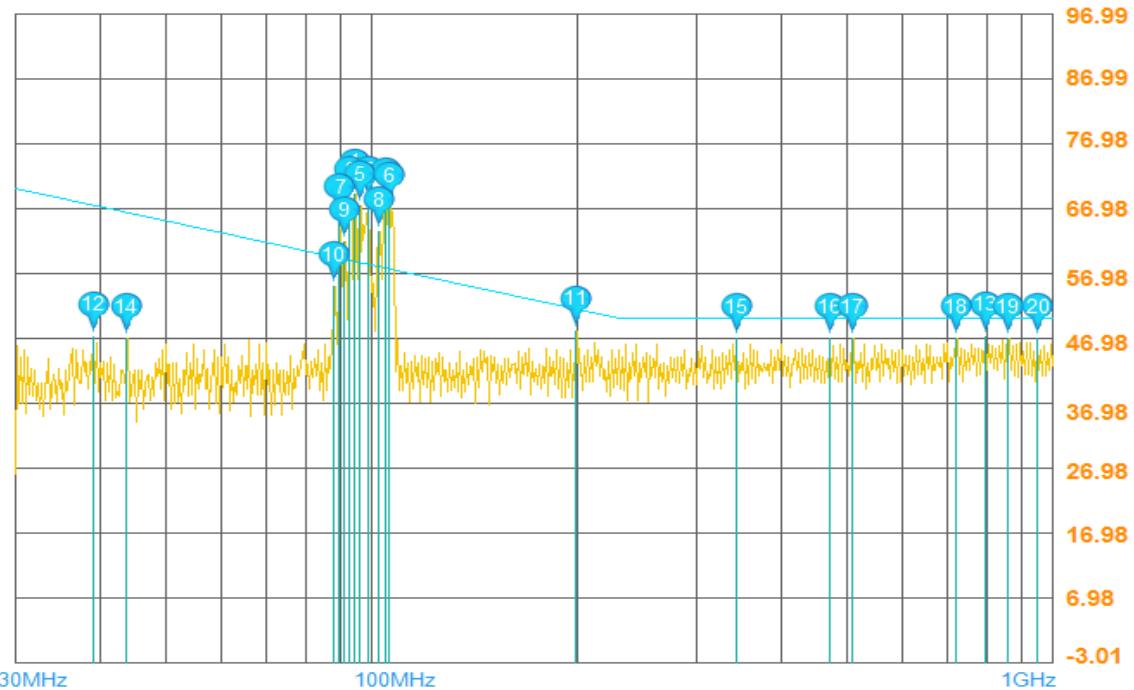

	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Probe Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Warning Fail
1	94.318	69.21	-4.358	73.568	69.21	--	--	--	
2	92.678	68.1	-5.632	73.732	68.1	--	--	--	
3	98.832	68.1	-5.016	73.116	68.1	--	--	--	
4	104.78	67.66	-4.861	72.521	67.66	--	--	--	
5	95.986	67.43	-5.971	73.401	67.43	--	--	--	
6	106.01	67.21	-5.188	72.398	67.21	--	--	--	
7	89.485	65.43	-8.621	74.051	65.43	--	--	--	
8	102.35	63.43	-9.334	72.764	63.43	--	--	--	
9	91.068	61.66	-12.23	73.893	61.66	--	--	--	
10	87.930	54.77	-19.43	74.206	54.77	--	--	--	
11	199.28	47.88	-15.19	63.071	47.88	--	--	--	
12	39.024	46.99	-32.10	79.097	46.99	--	--	--	
13	796.18	46.99	-13.01	60	46.99	--	--	--	
14	43.607	46.77	-31.86	78.639	46.77	--	--	--	
15	343.17	46.77	-13.23	60	46.77	--	--	--	
16	470.52	46.77	-13.23	60	46.77	--	--	--	
17	507.66	46.77	-13.23	60	46.77	--	--	--	
18	720.88	46.77	-13.23	60	46.77	--	--	--	
19	859.03	46.77	-13.23	60	46.77	--	--	--	
20	948.76	46.77	-13.23	60	46.77	--	--	--	