


dogsap.com

SETUP

- Print the sizing strips on LEGAL SIZE paper: 8.5 \times 14 in (216 \times 356 mm).
- In print settings, set the "Page Sizing & Handling" to "Actual Size" (100 %).
- Use measuring tape to check your printer's scaling.
- Use scissors to cut out the sizing strips that may fit your dog.
- Have your dog lay on its side.

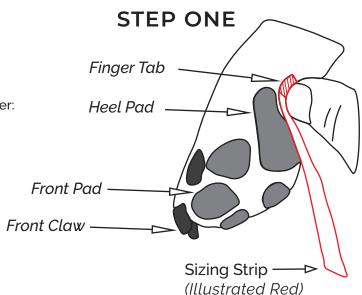

STEP ONE

- Press the finger tab against your dog's
 leg behind the metacarpal / metatarsal pad's
 ("heel pad's") furthest point from the front
 claws, which is not centered behind the heel pad.
- You should be pressing at Clawgs' heel location, which is the leg's skinniest part directly behind the heel pad.

Wrist / ankle bent

STEP TWO


- Press the sizing strip's loose end against your dog's front pads.
- Make sure your dog's wrist / ankle is bent as far as possible to its standing position.
- The sizing strip's front edge is located at that size's front claws' opening.

SIZE SELECTION

- Select the longest sizing strip that does not contact your dog's front claws' tips while your dog's wrist / ankle is fully bent to its standing position.
- Ideally, the sizing strip will completely cover your dog's front pad but will not contact your dog's front claws' tips.

Note: Your dog's front paws and back paws may be different sizes.

Note: If you can't decide between two sizes, select the larger size.



STEP TWO

