


INSTRUCTION MANUAL BEVERAGE COOLER

MODEL: JC-85C / JC-145C

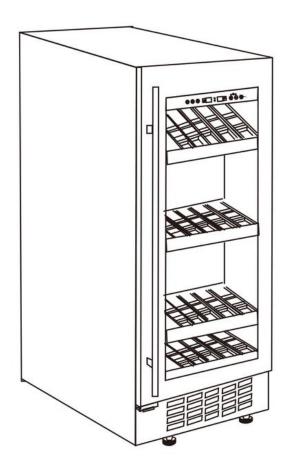

This manual contains important information including safety and installation instructions of the appliances. Please read it carefully before use and follow all safety information & instructions. It is recommended to keep this manual for easy reference so that you can be familiar with the operation of the appliance.

CONTENTS

WARNING	2
IMPORTANT SAFETY INSTRUCTIONS	.3
INSTALLATION INSTRUCTIONS	-4
UNPACKING AND INSTALL THE DOOR HANDLE	4
TEMPERATURE SETTING	6
CARE & MAINTENANCE	-9
TROUBLESHOOTING GUIDE	·10
WARRANTY	11

WARNING

- To prevent damaging the door gasket, make sure to have the door all the way opened when pulling shelves out of the rail compartment.
- The appliance must be positioned so that the plug is accessible. Release the electric cord. Move your cabinet to its final location. Do not move your Cabinet while loaded with beverage and wine. You might distort its body. The Beverage Cooler should be installed in a suitable place in order to avoid touching the compressor with hand.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- If the supply cord is damaged, it must be replaced by manufacturer of its Service agent or a similarly qualified person in order to avoid a hazard.

PLEASE DON'T TRY TO PLUG INTO OR EXTENSION THE CABLE IN ANY CASE.

IMPORTANT SAFETY INSTRUCTIONS

₩WARNING	To reduce the risk of fire, electrical shock, or injury when using your appliance, follow
	these basic precautions:

- Read all instructions before using the Beverage Cooler.
- DANGER or WARNING: Risk of child entrapment.
- Child entrapment and suffocation are not problems of the past. Junked or abandoned appliances are still dangerous even if they will "just sit in the garage a few days".
- **Before you throw away your old Beverage Cooler:** Take off the door. Leave the shelves in place so that children may not easily climb inside.
- Never allow children to operate, play with, or crawl inside the appliance.
- Never clean appliance parts with flammable fluids. The fumes can create a fire hazard or explosion.
- Do not store or use gasoline or any other flammable vapors and liquids in the vicinity of this or any other appliance. The fumes can create a fire hazard or explosion. Do not store explosive substances such as aerosol cans with a flammable propellant in this appliance.
- WARNING: Keep ventilation openings, in the appliance enclosure or in the built-in structure, clear of obstruction;
- WARNING: Do not use mechanical devices or other means to accelerate the defrosting process, other than those Recommended by the manufacturer;
- To avoid a hazard due to instability of the appliance, it must be fixed in accordance with the instructions.
- WARNING: Do not damage the refrigerant circuit;
- WARNING: Do not use electrical appliances inside the food storage compartments of the appliance, unless they are the type recommended by the manufacturer.
- If the refrigerant of these appliances are R600a, Flammable and explosive articles should not be put in or near the cabinet, to avoid the fire or explode caused.

-Save these instructions-

UNPACKING AND INSTALL THE DOOR HANDLE

Remove the exterior and interior packing materials.


Install the door handle provided with the appliance by following these steps:

Step 1 —Remove the gasket at the inner side of the door

to expose the two screw holes.

Step 2 —Install the handle tightly with the screws and washers provided.

Step 3 —Tidy and restore the gasket.



INSTALLATION INSTRUCTIONS

> Before Using Your Beverage cooler

- Remove the exterior and interior packing.
- Before connecting the Beverage cooler to the power source, let it stand upright for approximately 24 hours. This will reduce the possibility of a malfunction in the cooling system from handling during transportation.
 - Use a soft cloth to clean the interior surface with lukewarm water.
 - This appliance is intended to be used in household and similar applications such as
 - Staff kitchen areas in shops, offices and other working environments;
 - Farm houses and by clients in hotels, motels and other residential type environments;
 - Bed and breakfast type environments;
 - Catering and similar non-retail applications.
 - When disposing your appliance, please choose an authorized disposal site.

Installation of Your Beverage cooler

- This appliance is designed to be for free standing installation or built-in (fully recessed) (Refer to sticker location the back of this appliance).
- This appliance is intended to be used exclusively for the storage of wine or beverages.
- Place your Beverage cooler on a flat floor that is strong enough to support it when it is fully loaded. To level your Beverage cooler, adjust the front leveling leg at the bottom of the Beverage cooler.
- This appliance is using flammability refrigerant. So never damage the cooling pipework during
 the transportation. Locate the Beverage cooler away from direct sunlight and sources of heat
 (stove, heater, radiator, etc.). Direct sunlight may affect the acrylic coating and heat sources
 may increase electrical consumption. Extreme cold ambient temperatures may also cause the
 unit not to perform properly.
 - Avoid locating the unit in moist areas.
- Plug the Beverage cooler into an exclusive, properly installed-grounded wall outlet. Do not cut
 or remove the third (ground) prong from the power cord under any circumstances. Any
 questions concerning power and/or grounding should be directed toward a certified electrician
 or an authorized Products service center.

> Attention

- Store beverage and wine in sealed bottles;
- · Do not overload the cabinet;
- · Do not open the door unless necessary;
- · Do not cover shelves with aluminum foil or any other shelf material which may prevent air

circulation;

• Should the Beverage cooler be stored without use for long periods, it is suggested to leave the door ajar to allow air to circulate inside the cabinet after a careful cleaning, avoiding possible formations of condensation, mold or odors.

> Ambient Room Temperature Limits


This appliance is designed to operate in ambient temperatures specified by its temperature class marked on the rating plate.

Class	Symbol	Ambient Temperatures range (°C / °F)
Extended Temperate	SN	+ 10°C/ 50 °F to + 32°C / 89.6°F
Temperate	N	+ 16°C / 60.8°F to + 32°C / 89.6°F
Subtropical	ST	+ 16°C / 60.8°F to + 38°C / 100.4°F
Tropical	Т	+ 16°C / 60.8°F to + 43°C / 109.4°F

Description of product model

Model	Description
JC-85C	94 cans single zone beverage cooler
JC-145C	164 cans single zone beverage cooler

The standard can as below:



The stated loading capacity is based on the standard-size soda drink with 2.6" in diameter and 4.84" in height.

STORAGE


- To prevent damaging the door gasket, make sure to have the door opened fully all the way before pulling the shelves out.
- Please store beverage and wine in sealed bottles.
- Should the beverage cooler be left empty for long periods it is suggested that the
 appliance is unplugged, and after careful cleaning, leave the door ajar to allow air to
 circulate inside the cabinet in order to avoid possible condensation, mold or odours
 forming.
- Recommended Temperatures for chilling/storage your wines.

Beverage	4-6 °C / 39-42.8°F
Dry/White Wines	9-14°C / 48.2-57.2°F
Sparkling Wines	5-8°C / 41-46.4°F

OPERATING YOUR BEVERAGE COOLER AND SETTING THE TEMPERATURE CONTROL

FOR JC-85C /JC-145C Beverage Cooler

> Control System Instruction

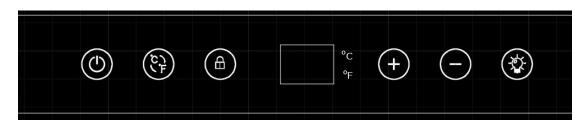

- Power switch
 Plug in, press
 for 3 seconds to turn on or off the unit.
- button ;Press to change the temperature display between Celsius and Fahrenheit.
- Lock button Press for 3 seconds to lock the control panel except light button, press this button again once need to unlock the control panel.
- button: The temperature will increase 1°F or 1°C if you push the temperature will decrease 1°F or 1°C if you push the button.
- Light button Press to turn on or off.

> Setting The Temperature Controls

- You can set the temperature as you desire by pushing the "+"or "-"button. When you push the two buttons for the first time, the LED readout will show the original temperature set at previous time.
- The temperature that you desire to set will increase 1°C/33.8°F if you push the "+"button once, on the contrary the temperature will decrease 1°C/33.8°F if you push the "-" button once.
- After the unit is unplugged, the system will return to default setting temperature, which set by factory. The default setting temperature as below:


Model	Temperature range	
JC-85C BEVERAGE COOLER	The temperature setting can be adjusted from $2^{\circ}\mathrm{C}$ /35.6 $^{\circ}\mathrm{F}$	to
JC-145C BEVERAGE COOLER		
	The temperature preset at the factory is $6^{\circ}\text{C}/42.8^{\circ}\text{F}$.	

> Attention


If the unit is unplugged, power lost, or turned off, you must wait 3 to 5 minutes before restart the unit. If you attempt to restart before this time delay, the Beverage Cooler will not start. If first time use or longer absence of using, the temperature will be different between setting and LED display temperature. After running a period, the temperature will be reverting back.

> Shelves

If need to take out any shelf, move the shelf towards the gap on the both sides. Then lift upwards the shelf and pull out it from the cabinet once the shelf support disengaged from the gap.

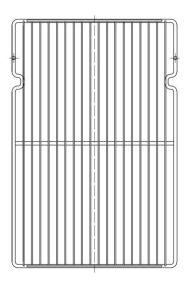


BUILT-UNDER SERIES (Built under a kitchen table top)

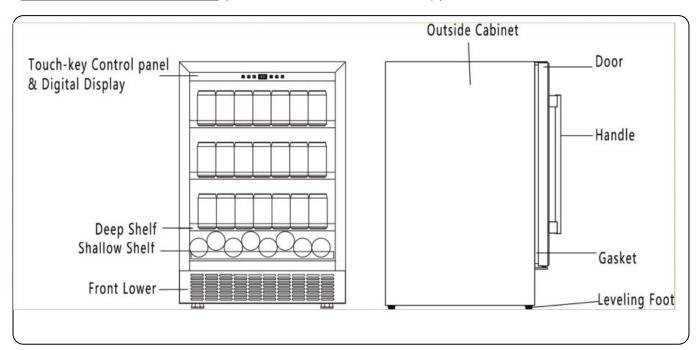


Remark: The above picture is for reference only. Please refer to the actual product.

➤ Installation specifications for built-in purposes JC-85C

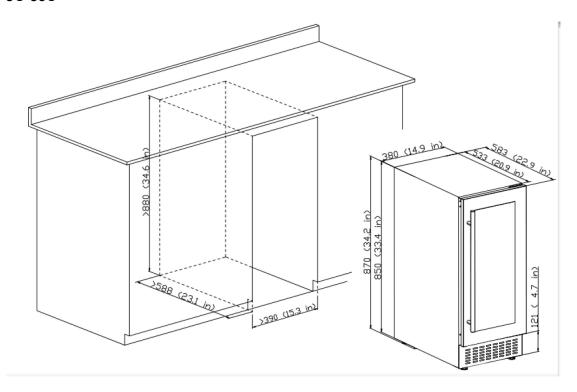

JC-145C

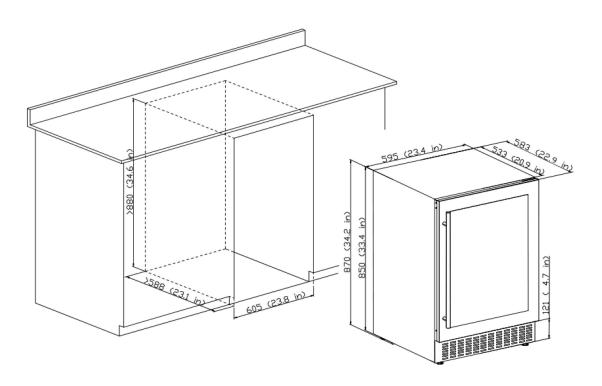

LOCK & UNLOCK THE DOOR (FOR OPTION)

Lock is an optional function. If your Beverage Cooler has such function, a key should be attached inside the packing of this Manual.


Insert the key into the lock and turn it counter-clockwise to unlock the door. To lock it, please follow the reversed operation. Please save the key well.

CHARCOAL FILTRATION SYSTEM

Your wine is a living object that breathes through the cork of its bottle. In order to preserve the quality and taste of your fine wines, they must be stored at the ideal temperature and ambient conditions. Your cellar is equipped with an active charcoal filtration system to ensure air purity, cooling efficiency, and to maintain an odor free cabinet for the storage of your beverage and fine wines. The filter assembly is located at the rear panel inside your cellar.

Keep in mind, that this filter must be changed every 12 months and purchase the new one from the distributor.

To replace your filter:

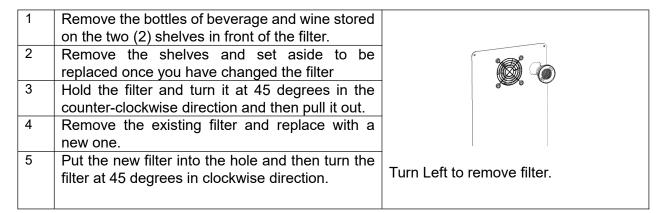

CARE & MAINTENANCE

Clean your Beverage Cooler

Turn off the power, unplug the appliance, and remove all items including shelves and rack. Wash the inside surfaces with a warm water and mild solution.

Wash the shelves with a mild detergent solution.

Wring excess water out of the sponge or cloth when cleaning area of the controls, or any electrical parts.

Wash the outside cabinet with warm water and mild liquid detergent. Rinse well and wipe dry with a clean soft cloth.

Power failure

Most power failures are corrected within a few hours and should not affect the temperature of your appliance if you minimize the number of times the door is opened. If the power is going to be off for a long period of time, you need to take the proper steps to protect your contents.

Vacation Time

Short vacations: Leave the Beverage Cooler operating during vacations of less than three weeks.

If the appliance will not be used for several months, remove all items and turn off the appliance. Clean and dry the interior thoroughly. To prevent odor and mold growth, leave the door open slightly: blocking it open if necessary.

> Moving your Beverage Cooler:

Remove all items.

Take out the loose items inside the Beverage Cooler (such as shelf), or fix the loose items with the foam.

Turn the adjustable leg up to the base to avoid damage.

Tape the door shut.

Be sure the appliance stays secure in the upright position during transportation. Also protect outside of appliance with a blanket or similar items.

Energy saving tips

The Beverage Cooler should be located in the coolest area of the room, away from producing appliances, and out of the direct sunlight.

TROUBLESHOOTING GUIDE

If you feel the appliance is out of order, follow these instructions to try to see if you can solve the problem simply by yourself before calling for service.

Possible Cause **Problem** No plugged in. Beverage Cooler does not operate The appliance is turned off. The circuit breaker tripped or a blown fuse. Beverage Cooler is not cold Check the temperature control setting. External environment may require a higher enough settina. The door is opened too often. The door is not closed completely. The door gasket does not seal properly. Turns on and off frequently The room temperature is hotter than normal. Overload of the cabinet The door is opened too often. The door is not closed completely. The temperature control is not set correctly. The door gasket does not seal properly. The light does not work Not plugged in. The circuit breaker tripped or a blown fuse. The bulb has burned out. The light button is "OFF" Vibrations Check to sure that the Beverage Cooler is level. The rattling noise may come from the flow of the Too much noise refrigerant, which is normal. As each cycle ends, you may hear gurgling. Contraction and expansion of the inside walls may cause popping and crackling noises. The Beverage Cooler is not level. The door will not close properly The Beverage Cooler is not level. The door was reversed and not properly installed. The gasket is dirty. The shelves are out of position. The control panel does not work Not plug in The control panel is locked. Please press and at the same time for 3 seconds to unlock. Wine cooler self-checking. It's normal. The unit beeps.

Before disposal of the appliance:

- 1. Disconnect the main plug from the main socket.
- 2. Cut off the main cable and discard it.



This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.

WARRANTY


Thank you for choosing AOBOSI product. We sincerely hope that you are satisfied with it.


The manufacturer's warranty covers the product for a period of 12 months from the date of purchase against manufacturing faults. All warranties are automatically kept track of in our system, so there is no need to register your product.

Agent/Distributor is welcome to contact us. Email:info@iaobosi.com.

Any help or questions during use, please contact us via website www.iaobosi.com, send email to info@iaobosi.com, or scan our related QR Codes herein for quick service, we will service you within 24 hours. We suggest to provide a warranty card, a photo or a video if there's broken spare part or not working machine so that we can be much more clear about your problems and offer you the best solution.





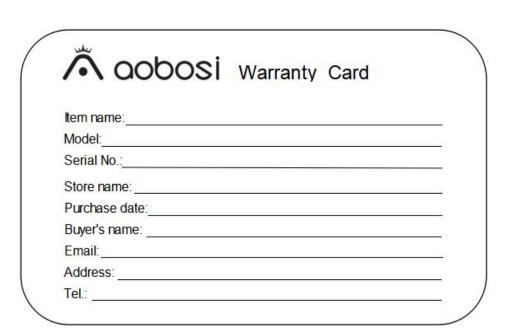

Please fill in the table and email it within 10 days from the date of purchase.