
# TYPES TERRA PRO" 2"FLOOD / SPOT LIGHT

WP ITM, LM58286 Care & Use Instructions



Important, retain for future reference: Read carefully

1. Choose a suitable mounting location for the Flood / Spot Light. Make

-Mark one hole for the Mounting Bracket for a precise installation.

2. Secure the Mounting Bracket to the surface with the M8 Screw,

-Make sure nothing beneath will be damaged after the hole is drilled.

3. Adjust the Light to your desired beam angle and tighten the Screws at

both sides with the 5mm Allen Key. Be sure not to over-tighten the

sure the location is strong enough to hold the Light.

-Drill the hole with an 8.5mm Drill Bit.

Spring Washer and Nut with a wrench.

screws after the adjustment.

P

INSTALLATION

· Wrench (not included)

· Allen Keys (2.5mm & 5mm)

Power Drill and 8.5mm Drill Bit (not included)

Tools Required:

# **WARNINGS**

IMPORTANT SAFETY INSTRUCTIONS

- 1. SAVE THESE INSTRUCTIONS- This manual contains important safety and operating instructions.
- 2. Before using this product, read all instructions and cautionary
- 3. Do not expose the bare wires to rain, moisture, or snow.
- 4. Use of an attachment not recommended or sold by the manufacturer may result in a risk of fire, electric shock, or injury
- 5. Do not operate with damaged Flood / Spot Light replace it immediately
- 6. Do not operate Flood / Spot Light if it has received a sharp blow, been dropped, or otherwise damaged in any way; take it to a qualified serviceperson.
- 7. Do not disassemble Flood / Spot Light; take it to a qualified serviceperson when service or repair is required. Incorrect reassembly may result in a risk of electric shock or fire.
- 8. To reduce risk of electric shock, unplug Flood / Spot Light before attempting any maintenance or cleaning. Turning off controls will not reduce this risk.

# **CAUTIONS**

Inserting the Flood Beam Lens:

Flood Beam Lens

c. Insert the Flood Beam Lens.

Mountings

b. Remove the Front Screws and Mountings.

a. Loosen the Front Screws with the 2.5mm Allen Key.

d. Reinstall the Mountings and tighten the Front Screws.

Front Screws

Check your state or provincial laws before installing. Vehicle owner must comply with all applicable laws. This product is intended solely for off road purposes. Manufacturer and seller assume no liability for installation or use, which are solely the responsibility of the purchaser. This product is not DOT approved and is designed and intended for off road uses only.

- 1. Do not install or use product if it, in any way, impairs the safe operation of your vehicle.
- 2. Follow manufacturer's instructions to ensure the product is properly and safely installed.

- 3. Check your state or provincial laws before installing. Vehicle owner must comply with all applicable laws.
- 4. This product is intended solely for off road purposes. Manufacturer and Seller assume no liability for installation or use, which are solely the responsibility of the purchaser.
- 5. This product is not DOT approved and is designed and intended for off road uses only.
- 6. The Manufacturer and Seller are not responsible or liable for consequential, incidental, or indirect damages, whether to person or property, resulting from the installation or improper use of this product.

▲ WARNING: This product can expose you to chemicals including DEHP and DINP, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

### **SPECIFICATIONS**

Working Voltage: DC 12-24V

LED Power: 18W

6.500K Super White Color Temperature: Maximum Amperage Draw: 0.82A (12V) / 0.41A (24V)

Raw Lumens: 1.920LM 850LM Effective Lumens: Housing IP Rating: IP67

Beam Type: Spot / Flood

#### Wire connection

Black wire (-) negative, ground connection

Red wire (+) positive, driving light

Fuse light at power source

Use 16-14 gauge wire

## WARRANTY

#### TYPE S LIMITED WARRANTY

TYPE S warrants, to the original purchaser, that its products are free from defects in material and workmanship for 1 year from the date of original purchase. Where permitted by law, TYPE S's liability shall be limited to that set forth in this limited express warranty. This limited express warranty shall be the exclusive remedy of the purchaser and TYPE S makes no other warranty of any kind aside from the limited express warranty stated above.

NOTE: Warranty only applies for North American customers of purchases made in North America.

#### CONDITIONS OF WARRANTY


If during the 1 year warranty period your new product is found to be defective, TYPE S will repair such defect, or replace the product, without charge for parts or labor subject to the following conditions:

- All repairs must be performed by TYPE S. All warranty claims must be accompanied by a copy of the sales receipt or bill of sale
- 3. The equipment must not have been altered or damaged through negligence, accident, improper operation, or failure to follow the product instructions for installation, use, or care
- The replacement of parts is excluded from the warranty when replacement is necessary due to normal wear and tear.
- Repair or replacement parts supplied by TYPE S under this warranty are protected only for the unexpired portion of the original warranty.
- This is a "repair or replace" warranty only, and does not cover the costs incurred for the installation, removal or reinstallation of the product, or damage to any mobile phone, electronic device or vehicle.

#### **OWNER'S RESPONSIBILITIES:**

TYPE S will make every effort to provide warranty service within a reasonable period of time. SHOULD YOU HAVE ANY QUESTIONS ABOUT SERVICE RECEIVED OR IF YOU WOULD LIKE ASSISTANCE IN OBTAINING SERVICE, PLEASE CALL TOLL FREE 1.866.294.9244 DURING REGULAR BUSINESS HOURS, MONDAY THROUGH FRIDAY 8:00 AM TO 5:00 PM (Pacific Standard Time). For customer service and technical support, please call us at 1.866.294.9244 or email us at info@typesauto.com. If at that time it is determined that a replacement unit is needed, the support representative will issue a Return Authorization and instruct on how to get a new unit. TYPE S makes no

# **PACKAGE INCLUDES**







1 x Set of M8 Screw with Nut, Spring Washer and Flat Washer

2 x Allen Keys (2.5mm & 5mm)

# **TOOLS NEEDED (NOT INCLUDED)**




Power Drill



8.5mm Drill Bit

# RECOMMENDED MOUNTING POSITIONS

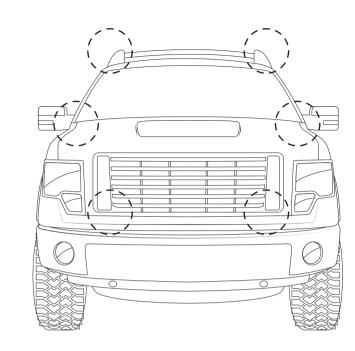

DISCLAIMER OF WARRANTIES, INCLUDING WARRANTY OF

other warranty of any kind aside from the limited express warranty

DISCLAIMER OF WARRANTIES, INCLUDING WARRANTY OF MERCHANTABILITY AND WARRANTY OF FITNESS FOR PARTICULAR PURPOSE: EXCEPT AS SPECIFICALLY SET FORTH HEREIN, NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, IS MADE AS TO THE FLOOD / SPOT LIGHT. TYPE S AND/OR ITS AFFILIATES EXPRESSLY DISCLAIMS, WITHOUT LIMITATION, ANY STATUTORY WARRANTIES AND ALL IMPLIED WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

TYPE S and/or its affiliates are not responsible for a user's intended or actual use of the Flood / Spot Light. In no event shall TYPE S and/or its affiliates have any liability for any losses (whether direct or indirect, in contract, tort or otherwise) incurred in connection with the Flood / Spot Light, including but not limited to damaged property, personal injury and/or loss of life. Neither shall TYPE'S and/or its affiliates have any liability for any decision, action taken based on relying on the stability or performance of the Flood / Spot Light. TYPE'S and/or its affiliates, the manufacturer, distributor and seller shall not be liable for any injury, loss or damage, incidental or consequential, arising out of the use or intended use of the product.

> Terra Pro™ 2" Flood / Spot Light Responsible Party: 2975 Red Hill Ave., Ste. 100, Costa Mesa, CA 92626. U.S.A. Tel: 1.866.294.9244



A Horizon Brands Company 2975 Red Hill Ave., Ste. 100, Costa Mesa, CA 92626, U.S.A. 1.866.294.9244 | info@typesauto.com ©2021 TYPE S. All rights reserved.

CONNECT WITH US







Made in China

ML-58286 V2