




## Dimensions/Weight

Overall Dimensions (mm): 150(h) x 900(w) x 500(d)  
 Duct Diameter (mm): 120mm  
 Weight: 9kg

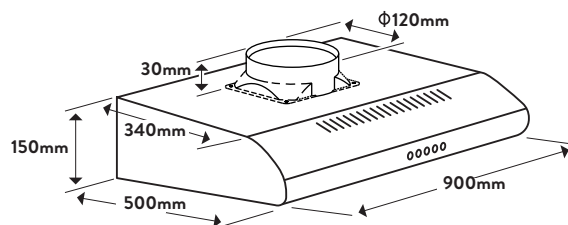

## Technical Details

### Style

Rangehood Type: Fixed  
 Category Size: 90cm

### Functionality

Extraction Type: Ducted or Front Recirculating  
 Extraction Rate: 345m<sup>3</sup>/hr Net  
 440m<sup>3</sup>/hr Gross  
 Number of Motors: 2  
 Watts of Motor: 100w  
 Speeds: 3  
 Filtration: 3 x Aluminium Mesh  
 Lights: 1 x 2W LED  
 dBA Rating: 49-56dBA

### Accessories

Charcoal Filter: Optional (ORCF110 X 2)

### Installation

Maximum Current: 3 Pin Plug  
 Connection: 220 - 240V, 50Hz  
 Installation Type: Built-in to Overhead Cabinetry

Warranty: 24 Months Parts & Labour

## Aesthetics

Finish: Brushed Stainless Steel  
 Controls: Push Buttons

## Key Features



### Front Recirculation

A recirculating rangehood draws the air inside the appliance, cleans it and pushes it through the front panel. Because there is no ducting required, these rangehoods are very easy to install.



### Washable Filter

The removable, washable filter is easy to maintain and keep clean ensuring your rangehood always performs well.



### Shallow Height

This rangehood has a shallow height meaning it is perfect for an areas with low overhead cupboards.

## Customer Care

T: 1300 739 033 (AU) 09 415 6000 (NZ)  
 E: [customercare@omegaappliances.com.au](mailto:customercare@omegaappliances.com.au) [customercare@monacocorp.co.nz](mailto:customercare@monacocorp.co.nz)

Updated 30/01/2020 - V1

NB: Drawings are not to scale - they are to assist only.  
 WARNING: technical specifications and product sizes can be varied by the manufacturer without notice. Cutouts for appliances should only be by physical product measurements. The above information is indicative only.