


ROOM AIR CONDITIONING

For over 30 years, TECO has provided Australia with Window / Wall Mounted Air Conditioners. This type of unit is perfect for the replacement of outdated and less efficient models. We have designed our unit sizes around standard, pre-existing cut outs for easy-fit wall mounting. For the ever-moving house hunters, our units can be relatively easy to install or uninstall depending on the location – window or wall. Therefore, you could potentially take your Window / Wall Mounted Air Conditioner when you go.

This gives you the flexibility in choosing your installation location to suit your needs today and tomorrow. This product also lends itself to applications where a wall split or ducted system is not an option due to the building or housing modifications associated.

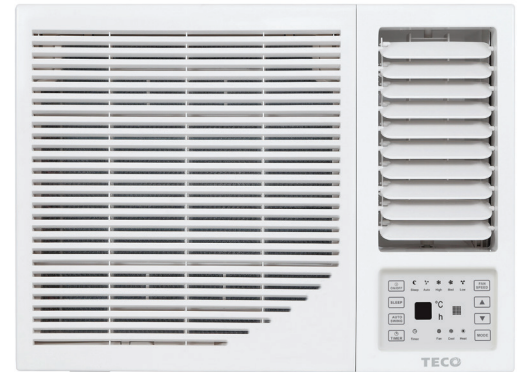

BENEFITS

TECO continues to provide high quality and affordable air conditioners with R410A refrigerant technology and convenient features, all backed by a nationwide service network.



3 in 1 Filter

This range of window / wall air conditioners have a filtration system consisting of 1. Photocatalyst 2. Active Carbon and 3. Static-Free. It's static-free and reduces dust, dirt and airborne particles from circulating in the air.




Wireless Remote

The convenient wireless remote lets you power on and off, set and adjust air conditioner settings from the comfort of your chair.




Auto Swing Airflow

To ensure even distribution of air, the automatic horizontal swing enables the air conditioner to reach the set temperature faster and maintain it for longer.



Gold Fin Protection

Gold fin protection provides peace of mind as it prolongs the life of the aluminium Condenser fins, by preventing the accumulation of harmful corrosive acids, salts and air borne contaminants, thereby prolonging the performance and lifespan of your Air Conditioner



ECO Mode

This economic mode sets the air conditioner to cycle off the compressor and fan motor once the set temperature has been reached. The fan motor will cycle to maintain the set temperature. This helps to reduce running costs without compromising comfort.



Sleep Mode

This mode reduces the fan speed and will gradually increase or decrease the temperature to ensure you get to sleep comfortably.



1300 660 037

WINDOW / WALL SPECIFICATIONS

TECO Window / Wall Model (cool only)		TWW16CFAT	TWW22CFAT	TWW27CFAT
Power Supply	V-Ph-Hz	220~240 - 1-50	220~240 - 1-50	220~240 - 1-50
Cooling Capacity	kW	1.6	2.2	2.7
Run Current	A	2.16	2.8	3.7
Plug Size	A	10	10	10
Input	W	500	648	830
Moisture Removal	L/hr	0.6	0.8	1.0
A.E.E.R		3.17	3.38	3.24
Star Rating* (Hot / Avg. / Cold)		1.5 / 1.5 / 1.5	1.5 / 1.5 / 1.5	2 / 1.5 / 1.5
Fan Speeds		3 + Auto	3 + Auto	3 + Auto
Indoor Cooling Air Flow (max)	L/s	117	131	117
Compressor Type		Rotary	Rotary	Rotary
Indoor Sound Power	dB(A)	57	55	57
Outdoor Sound Power	dB(A)	65	62	64
Dimensions (HxWxD)	mm	355 x 470 x 535	380 x 600 x 560	380 x 600 x 560
Packing (H x W x D)	mm	425 x 553 x 566	420 x 687 x 620	420 x 687 x 620
Net / Gross Weight	Kg	25 / 28	30 / 33	33 / 36
Recommended Cut-out Size (H x W)	mm	360 x 475	385 x 605	385 x 605
Refrigerant Type		R410A	R410A	R410A
Outdoor Operation Temperature	°C	18~43	18~43	18~43
TECO Window / Wall Model (reverse cycle)		TWW22HFAT	TWW26HFAT	
Power supply	V-Ph-Hz	220~240 - 1-50	220~240 - 1-50	
Cooling	Capacity	kW	2.2	2.6
	Input	W	680	790
	Run Current	A	3.1	3.4
	A.E.E.R		3.21	3.27
	Star Rating* (Hot / Avg. / Cold)		1.5 / 1.5 / 1.5	1.5 / 1.5 / 1.5
Heating	Capacity	kW	2.05	2.40
	Input	W	600	730
	Run Current	A	2.6	3.2
	A.C.O.P.		3.39	3.26
	Star Rating* (Hot / Avg. / Cold)		1 / 1 / 1	1 / 1 / 0.5
Plug Size	A	10	10	
Moisture Removal	L/hr	0.8	1.0	
Fan Speeds		3 + Auto	3 + Auto	
Indoor Cooling Air Flow (max)	L/s	114	119	
Compressor Type		Rotary	Rotary	
Indoor Sound Power	dB(A)	56	52	
Outdoor Sound Power	dB(A)	63	59	
Dimensions (HxWxD)	mm	380 x 600 x 560	380 x 600 x 560	
Packing (H*W*D)	mm	420 x 687 x 620	420 x 687 x 620	
Net/Gross weight	Kg	33 / 36	33 / 36	
Recommended Cut-out Size (HxW)	mm	385 x 605	385 x 605	
Refrigerant Type		R410A	R410A	
Outdoor Operation Temp.	Cooling	°C	18~43	18~43
	Heating	°C	-7~27	-7~27

All capacity and energy efficiency ratings are based on the 2019 gems <65kw determination for all TECO window wall air conditioners featured in this brochure. For more information, please visit : www.energyrating.gov.au/products/air-conditioners

Running current is at rated conditions (AS3823) and does not include compressor start-up or variations in power supply and load conditions.

Cooling Indoor temperature 27°C DB / 19°C WB Heating Indoor temperature 20°C DB / 15°C WB
Outdoor temperature 35°C DB / 24°C WB Outdoor temperature 7°C DB / 6°C WB

TECO

www.teco.com.au | sales@teco.com.au
1300 660 037