

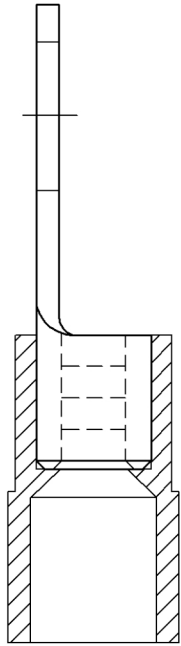


| REV | DESCRIPTION | DATE |
|-----|-------------|------|
|-----|-------------|------|

| | | |
|---|-----------|------------|
| △ | RDK-97127 | 2009/09/17 |
| △ | RDK-98020 | 2009/09/17 |

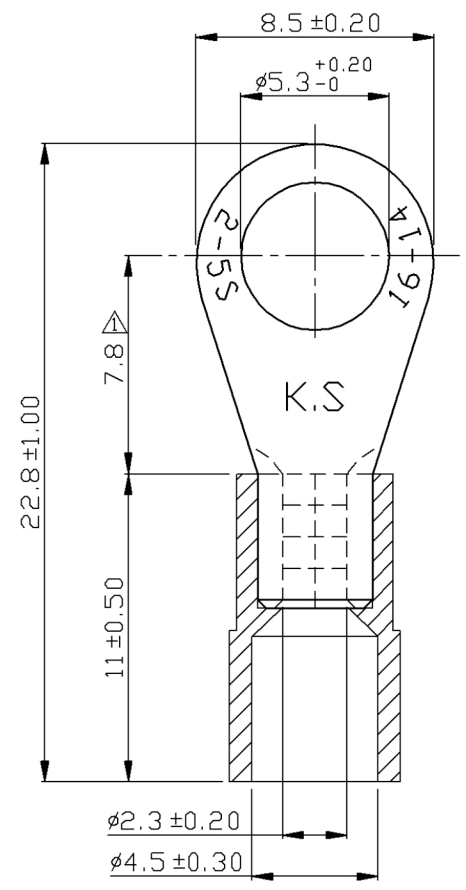

- NOTE :
1. MAXIMUM ELECTRIC CURRENT :

| | | | |
|--------|----|----|--|
| A.W.G. | 16 | 14 | |
| AMP. | 18 | 30 | |
 2. MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.
 3. INSULATION MATERIAL : NYLON
 4. INSULATION COLOR : BLUE
 5. TERMINAL MATERIAL : COPPER
 6. WIRE RANGE : 16-14 A.W.G. (1.5-2.5 mm²)
 7. TERMINAL SURFACE TREATMENT : TIN PLATED
 8. TERMINAL THICKNESS : 0.8 mm

| △ Tolerance Unless | | □ Otherwise Specified | |
|--------------------|------|-----------------------|---------|
| 0 > | mm ± | ANGLE | |
| > | mm ± | 0° > | ° REF ± |
| > | mm ± | ° > | ° ± |
| > | mm ± | ° > | ° ± |

| | | | | | | |
|----------|--------------------------------|----------|-------------------|------|----|--|
| NAME | NYLON-INSULATED RING TERMINALS | | | UNIT | mm | |
| PART NO. | RNYS2-5 | MATERIAL | TIN-PLATED COPPER | | | |
| NUMBER | KA-951049-C | SCALE | SHEET | PAGE | | |
| DATE | 2006/08/08 | 4/1 | 1-2 | 10F2 | | |

FerrulesDirect