



Fitting Instructions for the Toyota 70 Series FULL Front Neoprene Seat Covers with map pockets

Important things to know PRIOR to fitment:




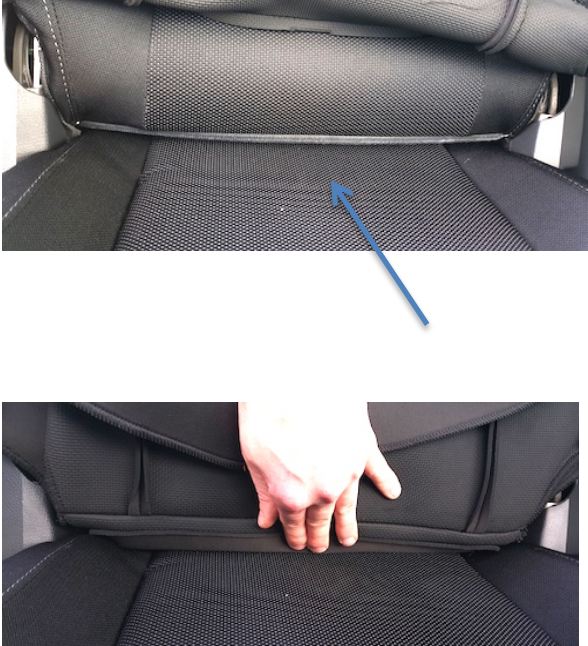
a) The Driver and Passenger side front seat covers are different. The easiest way to identify the difference. The velcro identified in the photo below will always be fitted closest to the door on both drivers and passengers side.




Step 1) Remove headrests by pressing the button and lifting the headrest out completely.



Step 2) Turn the neoprene headrest cover inside out and place on the headrest.

<p>'Rolling on'</p> 	<p>Step 3) Roll the headrest cover onto the headrest (the headrest cover should no longer be inside out).</p>
	<p>Step 4) Secure the touch tape tabs</p>
	<p>Step 5) Place the headrest safely to one side – It will be re-fitted later on</p>
	<p>Step 6) Gently place the seat cover over the backrest section. You should carefully lower the cover at the same rate. If one side is drastically favoured when fitted, it will stretch the opposing panel, which may potentially tear the seat covers. Ensure that the eyelets line-up with the holes in the seat.</p>
	<p>Step 7) Once the backrest section is correctly fitted you can then push the dowel pocket through the gap between the cushion and the backrest. The first illustration to the left indicates the gap in which the dowel pocket should be pushed through.</p> <p>The second illustration to the left indicates how the dowel should be tucked through</p>

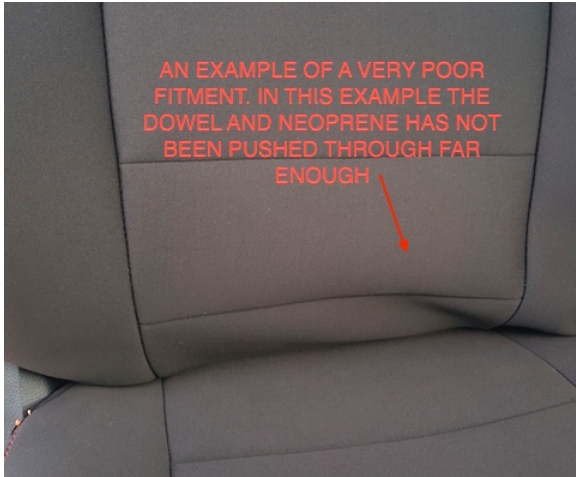

The third illustration to the left showcases a very poorly fitted seat cover. If there is too much ‘bunching up’ of material it means that you have not tucked enough of the dowel / neoprene through the gap between the cushion and the backrest. Our seat covers have been specially designed so that the seat cover can still be in operation / comfortable when the seats are fully reclined, which is why it is important to tuck the neoprene through the gap, when the seats are in an upright position.



The fourth illustration to the left showcases a perfectly fitted seat cover. In this example a suitable amount of the dowel / seat cover has been tucked through the gap.

PLEASE NOTE: If you are having trouble pushing the dowel pocket through the gap, you can always pull the dowel pocket through, from behind the back of the seat, by lifting up the carpet.



Step 8) Remove the protective touch tape and then affix the velcro to the carpet on the back of the seat.



Step 9) Re-fit Headrest



Step 10) Check to ensure the cover is looking like the pictures to the left.



Removal of the Seat Cover – Special Considerations

- 1) Ensure that you carefully remove the dowel from in-between the backrest and the cushion. This can be done by evenly pulling the material through on the left hand and right hand side. Failure to do so carefully could harm or tear the material. Warranty claims will not be accepted for tears to this region, as this is a fitment error, not material failure.
- 2) When removing the backrest portion, you should carefully raise the cover at the same rate. If one side is drastically favoured when removed, it will stretch the opposing panel, which may potentially tear the seat cover stitching.
- 3) Removal of the headrest cover – Once the headrest has been removed from the seat, simply follow Steps 4, 3 and 2 (in this order) – rolling off the material from the headrest. Once removed, please ensure that touch tape tabs are then secured – This will prevent any damage / fraying of threads, as a result of the touch tape sticking to the threads on the seat cover

On-going Maintenance / Care Instructions / Safety Instructions

- 1) Please use a warm cloth to remove any dirt or grime from the seat cover. Please then allow the seat cover to naturally dry.
- 2) Excessive vacuuming can have an impact on neoprene's laminated scrim. Whilst our neoprene is a car company specification neoprene, excessive vacuuming may shorten the life of the product.

Warranty Claims

Warranty claims are valid for 1 year and will only be accepted if the material is found to be defective. Photographic evidence must be provided prior to any goods being returned to Global Automotive Accessories for a warranty claim. Failure to follow the fitting instructions will void any warranty claims. Although the material is durable and stretchable in nature, if the cover is fitted too aggressively, like all materials, it can tear. Please ensure that the covers are fitted gently and with care.

Any further questions please contact

Andrew Leask
Owner / Director

Global Automotive Accessories

PO Box 217

Moorabbin VIC 3189

M: 0413 438 874

E: andrew@globalautomotive.com.au

Website: www.globalautomotive.com.au

eBay Store: <http://stores.ebay.com.au/globalautomotiveaccessories/>

Thank-you for your purchase

From all at Global Automotive Accessories we would like to thank-you for purchasing the Toyota 70 Series Front Neoprene Seat Cover. Our success would not be possible without our loyal and valued customers. If you are satisfied with the quality of our products and services, we would greatly appreciate it if you could recommend our products to your family or friends.