



**24" SIGNATURE SERIES**  
*Beverage Center*



**eco friendly**  
R600a Refrigerant



JOB	
AREA	
ITEM NO.	
MODEL NO.	



**Glass Door Model**



**Solid Door Model**

MODELS	DESCRIPTION
<b>HP24BS-4-1R/L</b>	Indoor Signature Series Beverage Center Solid Stainless Steel Door
<b>HP24BS-4-2R/L</b>	Indoor Signature Series Beverage Center Solid Panel Ready Door
<b>HP24BS-4-3R/L</b>	Indoor Signature Series Beverage Center Stainless Steel Glass Door
<b>HP24BS-4-4R/L</b>	Indoor Signature Series Beverage Center Panel Ready Glass Door
<b>HP24BO-4-1R/L</b>	Outdoor Signature Series Beverage Center Solid Stainless Steel Door
<b>HP24BO-4-2R/L</b>	Outdoor Signature Series Beverage Center Solid Panel Ready Door
<b>HP24BO-4-3R/L</b>	Outdoor Signature Series Beverage Center Stainless Steel Glass Door
<b>HP24BO-4-4R/L</b>	Outdoor Signature Series Beverage Center Panel Ready Glass Door
<b>HP24BM-4-1R/L</b>	Marine Signature Series Beverage Center Solid Stainless Steel Door
<b>HP24BM-4-2R/L</b>	Marine Signature Series Beverage Center Solid Panel Ready Door
<b>HP24BM-4-3R/L</b>	Marine Signature Series Beverage Center Stainless Steel Glass Door
<b>HP24BM-4-4R/L</b>	Marine Signature Series Beverage Center Panel Ready Glass Door

**KEY PRODUCT FEATURES AND BENEFITS**

- 1000 BTU/hr capacity delivers industry's most energy efficient cool down; indoors or outdoors
- Up to 70% faster cooling speeds than leading competitor
- Variable speed compressor minimizes sound; up to 30% quieter than competitors
- Commercial-grade all stainless steel interior and exterior provide superior durability and easy cleaning
- Perlick Anti-Condensation System™ eliminates condensation from forming on the cabinet (Outdoor and Marine models only)
- Marine & Coastal Grade with Perlick Armor™ upgrades stainless steel, fasteners, and refrigeration system to the highest blend of corrosion resistance and food safety

**Quick Features:**

- Wine and refrigerator shelves fully extend on vibration dampened, stainless steel ball-bearing glides; stainless steel wine shelves will not absorb odors over time
- Industry's best full 6 year warranty for owner ease of mind
- Available with stainless steel or panel ready doors to match your design style
- Audible door alarm warns user if door is held open
- Selectable blue or white LED lighting
- R600a Natural Refrigerant offers maximum energy efficiency with zero ozone depletion potential
- Storage for up to 62 cans and 16 bottles of wine



**24" SIGNATURE SERIES**  
*Beverage Center*

MODEL NUMBERS		HP24BS	HP24BO	HP24BM
MODEL DESCRIPTION		24" Indoor Beverage Center	24" Outdoor Beverage Center	24" Marine/Coastal Beverage Center
ATTRIBUTES				
Perlick Anti-Condensation System		NO	YES	YES
Energy Star Certified		YES	YES	YES
Perlick Armor™		NO	NO	YES
OVERALL DIMENSIONS	Width - in. (mm)	23-7/8" (606 mm.)	23-7/8" (606 mm.)	23-7/8" (606 mm.)
	Depth - in. (mm)	24" (610 mm.)	24" (610 mm.)	24" (610 mm.)
	Height - in. (mm)	34-1/4" (870 mm.)	34-1/4" (870 mm.)	34-1/4" (870 mm.)
STANDARD OPENING DIMENSIONS	Width - in. (mm)	24" (610 mm.)	24" (610 mm.)	24" (610 mm.)
	Depth - in. (mm)	24-7/8" (632 mm.)	24-7/8" (632 mm.)	24-7/8" (632 mm.)
	Height - in. (mm)	34-1/2" (876 mm.)	34-1/2" (876 mm.)	34-1/2" (876 mm.)
INTERNAL VOLUME Net. Cu. Ft.		5.2 cu. ft.	5.2 cu. ft.	5.2 cu. ft.
SHIPPING WEIGHT Lbs. (kg.)		222 (100.7 kg)	222 (100.7 kg)	225 (102.3 kg)
ELECTRICAL SPECIFICATIONS	Electrical Supply	115 VAC/60 Hz/1 Ph	115 VAC/60 Hz/1 Ph	115 VAC/60 Hz/1 Ph
	Running Load Amps	1.9 amps	1.9 amps	1.9 amps
	Electrical Connection	Cord connected	Cord connected	Cord connected
	Cord Plug Type	NEMA 3 Prong 5-15P	NEMA 3 Prong 5-15P	NEMA 3 Prong 5-15P
	Cord Length	6'	6'	6'
	Defrost Initiation	Automatic	Automatic	Automatic
	Defrost Type	Off cycle	Off cycle	Off cycle
	Thermostat	Digital	Digital	Digital
	Lighting Type	LED	LED	LED
REFRIGERATION SPECIFICATIONS	Refrigerant	R600a (62g)	R600a (62g)	R600a (62g)
	Expansion Device	Capillary Tube	Capillary Tube	Capillary Tube
	Temperature Settings F(°C)	33° (0.5°) - 48° (8.8°) <b>Factory Set Point 36° (2.2°)</b>	33° (0.5°) - 48° (8.8°) <b>Factory Set Point 36° (2.2°)</b>	33° (0.5°) - 48° (8.8°) <b>Factory Set Point 36° (2.2°)</b>
	Heat Rejection (at 75°F)	450 BTU/hr	450 BTU/hr	450 BTU/hr
	Pull Down Capacity	1000 BTU/hr	1000 BTU/hr	1000 BTU/hr
	Front Vented	Yes	Yes	Yes
PLUMBING		None Required	None Required	None Required

Installation Notes: To achieve 24" install depth, place electrical connection adjacent to the installation cavity.

**ACCESSORIES**

MODEL NOS.	DESCRIPTION
(L)	Factory Installed Lock
67991-L/R	Stacking Kit for HP24/HC24/HA24 models
66736	Caster Kit for HP24/HC24/HA24 models
67115-24	Wood Faces for Wine Shelves (7/pk)

Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit [perlick.com](http://perlick.com).




**24" SIGNATURE SERIES**  
*Beverage Center*

	CUSTOMER MODEL NUMBER	REGULATORY MODEL NUMBER	Hinge Side	Lock
INDOOR	HP24BS-4-1L	HP24BS4C-00-SLF0B	Left	No
	HP24BS-4-1R	HP24BS4C-00-SRF0B	Right	No
	HP24BS-4-2L	HP24BS4C-00-PL00B	Left	No
	HP24BS-4-2R	HP24BS4C-00-PR00B	Right	No
	HP24BS-4-3L	HP24BS4C-00-TLF0B	Left	No
	HP24BS-4-3R	HP24BS4C-00-TRF0B	Right	No
	HP24BS-4-4L	HP24BS4C-00-RL00B	Left	No
	HP24BS-4-4R	HP24BS4C-00-RR00B	Right	No
	HP24BS-4-1LL	HP24BS4C-00-SLFLB	Left	Yes
	HP24BS-4-1RL	HP24BS4C-00-SRFLB	Right	Yes
	HP24BS-4-2LL	HP24BS4C-00-PL0LB	Left	Yes
	HP24BS-4-2RL	HP24BS4C-00-PROLB	Right	Yes
	HP24BS-4-3LL	HP24BS4C-00-TLFLB	Left	Yes
	HP24BS-4-3RL	HP24BS4C-00-TRFLB	Right	Yes
	HP24BS-4-4LL	HP24BS4C-00-RL0LB	Left	Yes
	HP24BS-4-4RL	HP24BS4C-00-RR0LB	Right	Yes
OUTDOOR	HP24BO-4-1L	HP24BO4C-00-SLF0B	Left	No
	HP24BO-4-1R	HP24BO4C-00-SRF0B	Right	No
	HP24BO-4-2L	HP24BO4C-00-PL00B	Left	No
	HP24BO-4-2R	HP24BO4C-00-PR00B	Right	No
	HP24BO-4-3L	HP24BO4C-00-TLF0B	Left	No
	HP24BO-4-3R	HP24BO4C-00-TRF0B	Right	No
	HP24BO-4-4L	HP24BO4C-00-RL00B	Left	No
	HP24BO-4-4R	HP24BO4C-00-RR00B	Right	No
	HP24BO-4-1LL	HP24BO4C-00-SLFLB	Left	Yes
	HP24BO-4-1RL	HP24BO4C-00-SRFLB	Right	Yes
	HP24BO-4-2LL	HP24BO4C-00-PL0LB	Left	Yes
	HP24BO-4-2RL	HP24BO4C-00-PROLB	Right	Yes
	HP24BO-4-3LL	HP24BO4C-00-TLFLB	Left	Yes
	HP24BO-4-3RL	HP24BO4C-00-TRFLB	Right	Yes
	HP24BO-4-4LL	HP24BO4C-00-RL0LB	Left	Yes
	HP24BO-4-4RL	HP24BO4C-00-RR0LB	Right	Yes
MARINE & COASTAL	HP24BM-4-1L	HP24BM4C-00-MLF0B	Left	No
	HP24BM-4-1R	HP24BM4C-00-MRF0B	Right	No
	HP24BM-4-2L	HP24BM4C-00-PL00B	Left	No
	HP24BM-4-2R	HP24BM4C-00-PR00B	Right	No
	HP24BM-4-3L	HP24BM4C-00-NLF0B	Left	No
	HP24BM-4-3R	HP24BM4C-00-NRF0B	Right	No
	HP24BM-4-4L	HP24BM4C-00-RL00B	Left	No
	HP24BM-4-4R	HP24BM4C-00-RR00B	Right	No
	HP24BM-4-1LL	HP24BM4C-00-MLFLB	Left	Yes
	HP24BM-4-1RL	HP24BM4C-00-MRFLB	Right	Yes
	HP24BM-4-2LL	HP24BM4C-00-PL0LB	Left	Yes
	HP24BM-4-2RL	HP24BM4C-00-PROLB	Right	Yes
	HP24BM-4-3LL	HP24BM4C-00-NLFLB	Left	Yes
	HP24BM-4-3RL	HP24BM4C-00-NRFLB	Right	Yes
	HP24BM-4-4LL	HP24BM4C-00-RL0LB	Left	Yes
	HP24BM-4-4RL	HP24BM4C-00-RR0LB	Right	Yes



**24" SIGNATURE SERIES**  
Beverage Center

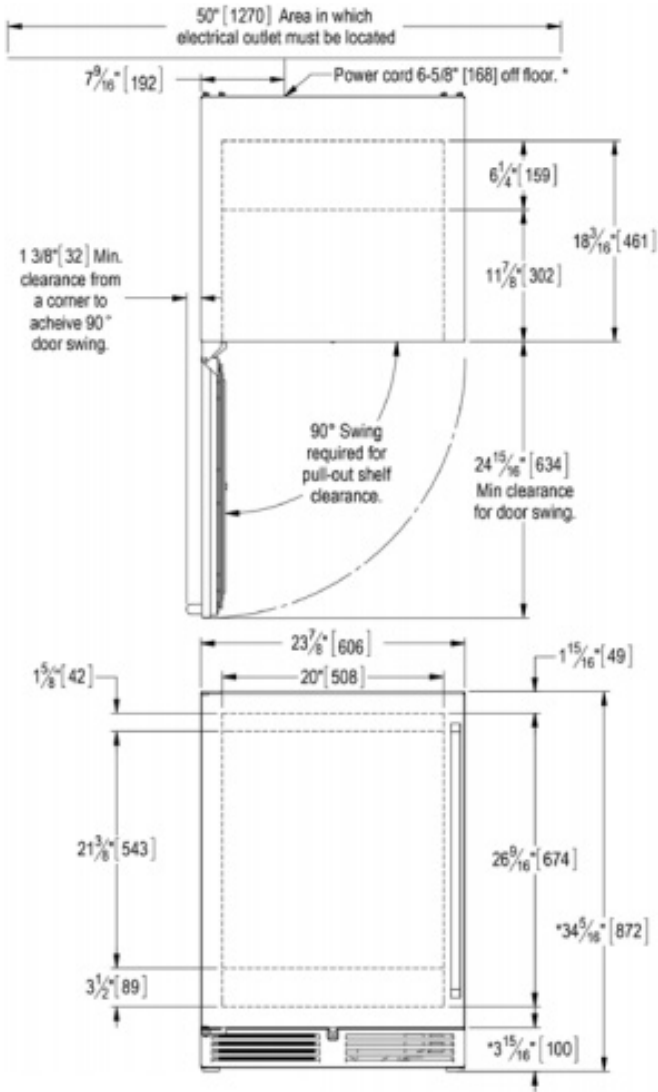

\* - Leg levelers can add 3/4" [19] to these dimensions when fully extended.

