

**Perlick®** 24" SIGNATURE SERIES Refrigerator



eco friendly  
R600a Refrigerant



JOB	
AREA	
ITEM NO.	
MODEL NO.	



Glass Door Model



Solid Door Model

MODELS	DESCRIPTION
HP24RS-4-1R/L	Indoor Signature Series Refrigerator Solid Stainless Steel Door
HP24RS-4-2R/L	Indoor Signature Series Refrigerator Solid Panel Ready Door
HP24RS-4-3R/L	Indoor Signature Series Refrigerator Stainless Steel Glass Door
HP24RS-4-4R/L	Indoor Signature Series Refrigerator Panel Ready Glass Door
HP24RO-4-1R/L	Outdoor Signature Series Refrigerator Solid Stainless Steel Door
HP24RO-4-2R/L	Outdoor Signature Series Refrigerator Solid Panel Ready Door
HP24RO-4-3R/L	Outdoor Signature Series Refrigerator Stainless Steel Glass Door
HP24RO-4-4R/L	Outdoor Signature Series Refrigerator Panel Ready Glass Door
HP24RM-4-1R/L	Marine Signature Series Refrigerator Solid Stainless Steel Door
HP24RM-4-2R/L	Marine Signature Series Refrigerator Solid Panel Ready Door
HP24RM-4-3R/L	Marine Signature Series Refrigerator Stainless Steel Glass Door
HP24RM-4-4R/L	Marine Signature Series Refrigerator Panel Ready Glass Door

**KEY PRODUCT FEATURES AND BENEFITS**

- 1000 BTU/hr capacity delivers industry's most energy efficient cool down; indoors or outdoors
- Up to 70% faster cooling speeds than leading competitor
- Variable speed compressor minimizes sound; up to 30% quieter than competitors
- Commercial-grade all stainless steel interior and exterior provide superior durability and easy cleaning
- Perlick Anti-Condensation System™ eliminates condensation from forming on the cabinet (Outdoor and Marine models only)
- Marine & Coastal Grade with Perlick Armor™ upgrades stainless steel, fasteners, and refrigeration system to the highest blend of corrosion resistance and food safety

**Quick Features:**

- Full extension shelving provides faster and safer product access with no reaching in the back of the cabinet; shelves fully extend on vibration dampened stainless steel ball bearing glides
- Industry's best full 6 year warranty for owner ease of mind
- Available with stainless steel or panel ready door to match your design style
- Audible door alarm warns user if door is held open
- Selectable blue or white LED lighting
- R600a Natural Refrigerant offers maximum energy efficiency with zero ozone depletion potential
- Storage for up to 144 cans



**24" SIGNATURE SERIES**  
*Refrigerator*

MODEL NUMBERS		HP24RS	HP24RO	HP24RM
MODEL DESCRIPTION		24" Indoor Refrigerator	24" Outdoor Refrigerator	24" Marine/Coastal Refrigerator
ATTRIBUTES				
Perlick Anti-Condensation System		NO	YES	YES
Energy Star Certified		YES	YES	YES
Perlick Armor™		NO	NO	YES
OVERALL DIMENSIONS	Width - in. (mm)	23-7/8" (606 mm.)	23-7/8" (606 mm.)	23-7/8" (606 mm.)
	Depth - in. (mm)	24" (610 mm.)	24" (610 mm.)	24" (610 mm.)
	Height - in. (mm)	34-1/4" (870 mm.)	34-1/4" (870 mm.)	34-1/4" (870 mm.)
STANDARD OPENING DIMENSIONS	Width - in. (mm)	24" (610 mm.)	24" (610 mm.)	24" (610 mm.)
	Depth - in. (mm)	24" (610 mm.)	24" (610 mm.)	24" (610 mm.)
	Height - in. (mm)	34-1/2" (876 mm.)	34-1/2" (876 mm.)	34-1/2" (876 mm.)
INTERNAL VOLUME Net. Cu. Ft.		5.2 cu. ft.	5.2 cu. ft.	5.2 cu. ft.
SHIPPING WEIGHT Lbs. (kg.)		210 (95.3 kg)	210 (95.3kg)	213 (96.7 kg)
ELECTRICAL SPECIFICATIONS	Electrical Supply	115 VAC/60 Hz/1 Ph	115 VAC/60 Hz/1 Ph	115 VAC/60 Hz/1 Ph
	Running Load Amps	1.9 amps	1.9 amps	1.9 amps
	Electrical Connection	Cord connected	Cord connected	Cord connected
	Cord Plug Type	NEMA 3 Prong 5-15P	NEMA 3 Prong 5-15P	NEMA 3 Prong 5-15P
	Cord Length	6'	6'	6'
	Defrost Initiation	Automatic	Automatic	Automatic
	Defrost Type	Off cycle	Off cycle	Off cycle
	Thermostat	Digital	Digital	Digital
	Lighting Type	LED	LED	LED
REFRIGERATION SPECIFICATIONS	Refrigerant	R600a (62g)	R600a (62g)	R600a (62g)
	Expansion Device	Capillary Tube	Capillary Tube	Capillary Tube
	Temperature Settings F°(C°)	33° (0.5°) - 48° (8.8°) Factory Set Point 36° (2.2°)	33° (0.5°) - 48° (8.8°) Factory Set Point 36° (2.2°)	33° (0.5°) - 48° (8.8°) Factory Set Point 36° (2.2°)
	Heat Rejection (at 75°F)	450 BTU/hr	450 BTU/hr	450 BTU/hr
	Pull Down Capacity	1000 BTU/hr	1000 BTU/hr	1000 BTU/hr
	Front Vented	Yes	Yes	Yes
PLUMBING		None Required	None Required	None Required

Installation Notes: To achieve 24" install depth, place electrical connection adjacent to the installation cavity.

**ACCESSORIES**

MODEL NOS.	DESCRIPTION
(L)	Factory Installed Lock
67991-L/R	Stacking Kit for HP24/HC24/HA24 models
66736	Caster Kit for HP24/HC24/HA24 models
RK24DP	Drawer Pan Tray (3 SS pans with covers)


Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit [perlick.com](http://perlick.com).



**24" SIGNATURE SERIES**  
Refrigerator

	CUSTOMER MODEL NUMBER	REGULATORY MODEL NUMBER	Hinge Side	Lock
INDOOR	HP24RS-4-1L	HP24RS4C-00-SLF0R	Left	No
	HP24RS-4-1R	HP24RS4C-00-SRF0R	Right	No
	HP24RS-4-2L	HP24RS4C-00-PL00R	Left	No
	HP24RS-4-2R	HP24RS4C-00-PR00R	Right	No
	HP24RS-4-3L	HP24RS4C-00-TLF0R	Left	No
	HP24RS-4-3R	HP24RS4C-00-TRF0R	Right	No
	HP24RS-4-4L	HP24RS4C-00-RL00R	Left	No
	HP24RS-4-4R	HP24RS4C-00-RR00R	Right	No
	HP24RS-4-1LL	HP24RS4C-00-SLFLR	Left	Yes
	HP24RS-4-1RL	HP24RS4C-00-SRFLR	Right	Yes
	HP24RS-4-2LL	HP24RS4C-00-PL0LR	Left	Yes
	HP24RS-4-2RL	HP24RS4C-00-PR0LR	Right	Yes
	HP24RS-4-3LL	HP24RS4C-00-TLFLR	Left	Yes
	HP24RS-4-3RL	HP24RS4C-00-TRFLR	Right	Yes
	HP24RS-4-4LL	HP24RS4C-00-RL0LR	Left	Yes
	HP24RS-4-4RL	HP24RS4C-00-RR0LR	Right	Yes
OUTDOOR	HP24RO-4-1L	HP24RO4C-00-SLF0R	Left	No
	HP24RO-4-1R	HP24RO4C-00-SRF0R	Right	No
	HP24RO-4-2L	HP24RO4C-00-PL00R	Left	No
	HP24RO-4-2R	HP24RO4C-00-PR00R	Right	No
	HP24RO-4-3L	HP24RO4C-00-TLF0R	Left	No
	HP24RO-4-3R	HP24RO4C-00-TRF0R	Right	No
	HP24RO-4-4L	HP24RO4C-00-RL00R	Left	No
	HP24RO-4-4R	HP24RO4C-00-RR00R	Right	No
	HP24RO-4-1LL	HP24RO4C-00-SLFLR	Left	Yes
	HP24RO-4-1RL	HP24RO4C-00-SRFLR	Right	Yes
	HP24RO-4-2LL	HP24RO4C-00-PL0LR	Left	Yes
	HP24RO-4-2RL	HP24RO4C-00-PR0LR	Right	Yes
	HP24RO-4-3LL	HP24RO4C-00-TLFLR	Left	Yes
	HP24RO-4-3RL	HP24RO4C-00-TRFLR	Right	Yes
	HP24RO-4-4LL	HP24RO4C-00-RL0LR	Left	Yes
	HP24RO-4-4RL	HP24RO4C-00-RR0LR	Right	Yes
MARINE & COASTAL	HP24RM-4-1L	HP24RM4C-00-MLF0R	Left	No
	HP24RM-4-1R	HP24RM4C-00-MRF0R	Right	No
	HP24RM-4-2L	HP24RM4C-00-PL00R	Left	No
	HP24RM-4-2R	HP24RM4C-00-PR00R	Right	No
	HP24RM-4-3L	HP24RM4C-00-NLF0R	Left	No
	HP24RM-4-3R	HP24RM4C-00-NRFOR	Right	No
	HP24RM-4-4L	HP24RM4C-00-RL00R	Left	No
	HP24RM-4-4R	HP24RM4C-00-RR00R	Right	No
	HP24RM-4-1LL	HP24RM4C-00-MLFLR	Left	Yes
	HP24RM-4-1RL	HP24RM4C-00-MRFLR	Right	Yes
	HP24RM-4-2LL	HP24RM4C-00-PL0LR	Left	Yes
	HP24RM-4-2RL	HP24RM4C-00-PR0LR	Right	Yes
	HP24RM-4-3LL	HP24RM4C-00-NLFLR	Left	Yes
	HP24RM-4-3RL	HP24RM4C-00-NRFLR	Right	Yes
	HP24RM-4-4LL	HP24RM4C-00-RL0LR	Left	Yes
	HP24RM-4-4RL	HP24RM4C-00-RR0LR	Right	Yes

**Perlick®** 24" SIGNATURE SERIES Refrigerator

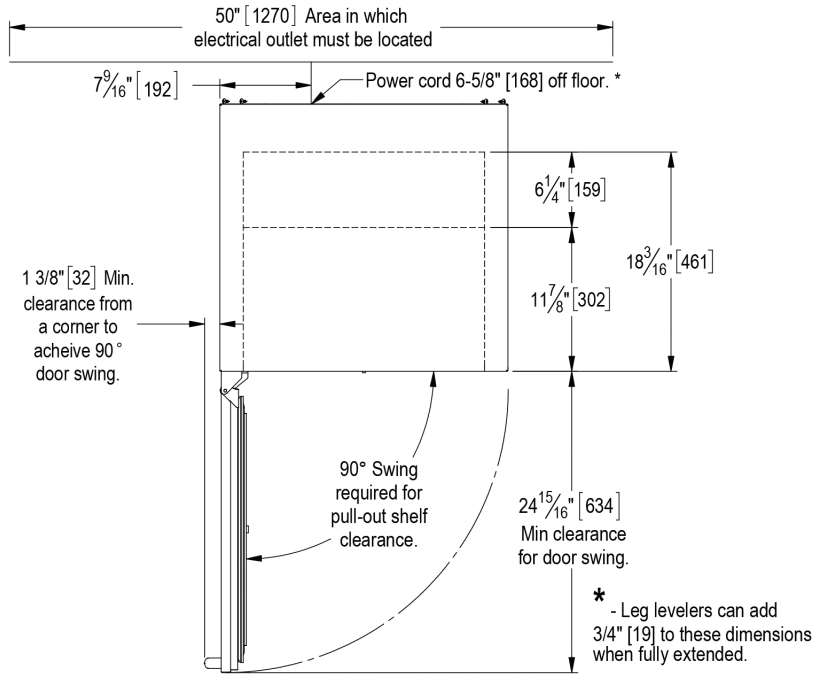

Door Models

