




IP65 Through-roof-mount 3G antenna

<p>Appearance</p>   <p>SMA</p>	<p>VSWR graph</p>  <p>Electrical characteristics</p> <table border="1"> <tr> <td>Frequency range</td> <td>900/1800/1900/2100 MHz</td> </tr> <tr> <td>VSWR</td> <td><1.8 : 1</td> </tr> <tr> <td>Radiation</td> <td>Omni</td> </tr> <tr> <td>Polarisation</td> <td>Vertical</td> </tr> <tr> <td>Max gain</td> <td>0 dB</td> </tr> <tr> <td>Impedance</td> <td>50 Ω</td> </tr> <tr> <td>Power consumption</td> <td>10 W (max)</td> </tr> </table>	Frequency range	900/1800/1900/2100 MHz	VSWR	<1.8 : 1	Radiation	Omni	Polarisation	Vertical	Max gain	0 dB	Impedance	50 Ω	Power consumption	10 W (max)
Frequency range	900/1800/1900/2100 MHz														
VSWR	<1.8 : 1														
Radiation	Omni														
Polarisation	Vertical														
Max gain	0 dB														
Impedance	50 Ω														
Power consumption	10 W (max)														

Ordering:
Part No. DAC-OS-3GD-00-C5-2.5 (SMA)

Mechanical characteristics	Specifications
Material	ABS
Colour	Black
Survival wind speed	62 - 74 km/h
Temperature (operating)	-30°C to +90°C
Humidity (operating)	100%
Cable length	2.5m (standard)
Weight	122g
Connector	SMA (m)
Mounting interface	Screw
Dimensions	53(W) x 38.4(D) x 30mm (H)

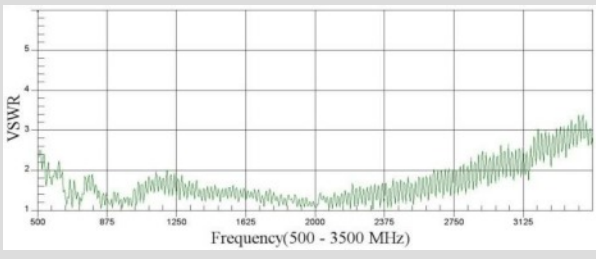