



**Product Code**  
 DTD-RACK-PI-01  
 DTD-RACK-PI-02-2  
 DTD-VOIP-PI-02-NPS

**Description**  
 VoIP Power Injector Rack with Power Supply  
 VoIP Power Injector Rack with Redundant Power  
 Power Injector with No Power Supply


# TSG Power Injector Rack Mount and Power Supply

Supports up to 12  
 DTD-VOIP-PI-02  
 power injectors



DTD-VOIP-PI-02

*Class A phones eliminate the requirement for locating the Layer 2/3 switch supporting the phone to be located at the same protection level as the phone*

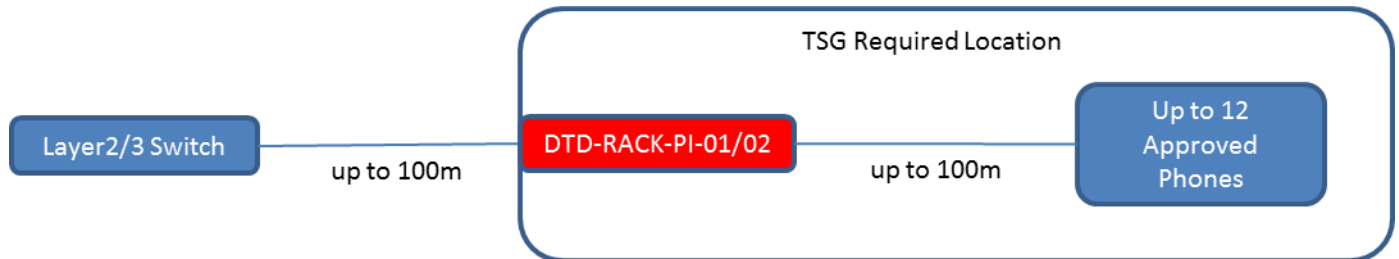

## Key Features

- Designed for use with DTD-VOIP-PI-02 power injectors
- Supports up to 12 CIS Class A power injectors (not included)
- Consolidates Class A Approved\* 10/100/1000 power injectors using a single power supply for clean PoE desktop deployments
- Can be located up to 100m from phones in the same classification area
- Available with redundant power supply (optional)

\*For CIS TSG Class A Approved devices **only**. Refer to TSG Class A Approved devices datasheet. **VoIP device must be approved for use with DTD-VOIP-PI-02.**

### Contact Us

CIS Secure Computing  
 43671 Trade Center Place, Suite 142  
 Dulles, VA 20166

Phone: 703-996-0500  
 Fax: 703-996-1111  
 eFax: fax@cissecure.com  
<http://www.cissecure.com>

## Specifications

### Rack

2U

### Dimensions (H x W x D)

3.5" x 19 x 11"

### Temperatures

Operating 40 to 95° F (5 to 35° C)

Non-operating -13 to 140° F (-25 to 60° C)

### Weight

4.0 lbs. (empty)

### Humidity

Operating:

8 to 85%, noncondensing

Non-operating:

8 to 90%, noncondensing

### Warranty

Standard 1 year parts and labor

Optional 3 year parts and labor


### Power

90-220 VAC (autosensing)

350 W max (power supply)

700 W max

(power supply with redundant power)

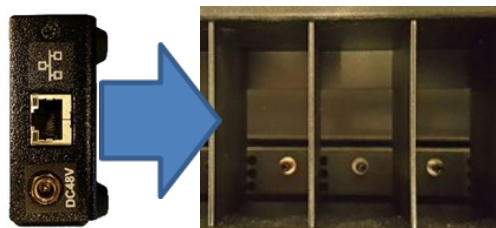

The CIS DTD-VOIP-PI-02 mounts easily into the DTD-RACK-PI-XX using a blind mate power connector and is held in place by the removable front bracket.