



emma hayes




Cloud

Non woven paper

To be floating and weightless, light and warm, free, happy and tranquil.

Design:	Cloud
Colour:	Sky
Pattern number:	EH020CS
Composition:	100% Non-woven paper, pearlescent finish
Grade:	Residential / light commercial
Repeat:	27" wide x 19" high (68.6cm x 48.4cm)
Roll size:	27" wide x 11 yards long (68.6cm wide x 10m long)
Area:	74.25 sq ft (6.95sqm)
Order:	by the roll
Fire Rating:	Class A, ASTM-E84 Euro Class B under the test protocols of BS EN 13823: 2002 and BS EN 13238: 2010. Classified in accordance with BS EN 13501-1: 2007. This correlates to New Zealand Group Number 1-S according to NZBC clause 3.4 (a) using ISO 9705:1993
Environment:	Our non-woven paper is sourced from sustainable forest sources and printed using non-toxic inks
Installation:	Butt join



Paste the wall

The adhesive should be applied to the surface that the wallcovering is being hung onto, e.g. the wall, and the paper applied dry direct from the roll. Note: The paper can still be pasted and hung in the conventional way if desired.



Spongeable

A finished wallcovering from which dirt and some water-based stains may be cleaned carefully from the front face of the paper with a damp soft cloth or sponge at the time of hanging without causing visible damage, providing it is done whilst the adhesive is still damp. No subsequent washability is claimed or implied.



Half sun

Standard lightness. The wallpaper has a minimum rating of 3 when tested in accordance with the EN233 lightfast procedure.

Butt join

Also known as a butted seam. The wallpaper rolls are finished precisely to have no overlap. Meaning the panels simply butt up to each other for ease of installation.



EMISSIONS DANS L'AIR INTÉRIEUR®
Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions).



EN 13959-1:2007+A1:2013
Product: 2430720007 and 2430710007
in accordance with EN 13959-1
Reference: EN 13959-1:2007
Release of dangerous substances: heavy metals, specific elements and volatile organic compounds. FSC
Release of formaldehyde: Pass




Type II commercial grade and custom colourways are available on request. Please contact us for further information.



emma hayes

Example of pattern repeat

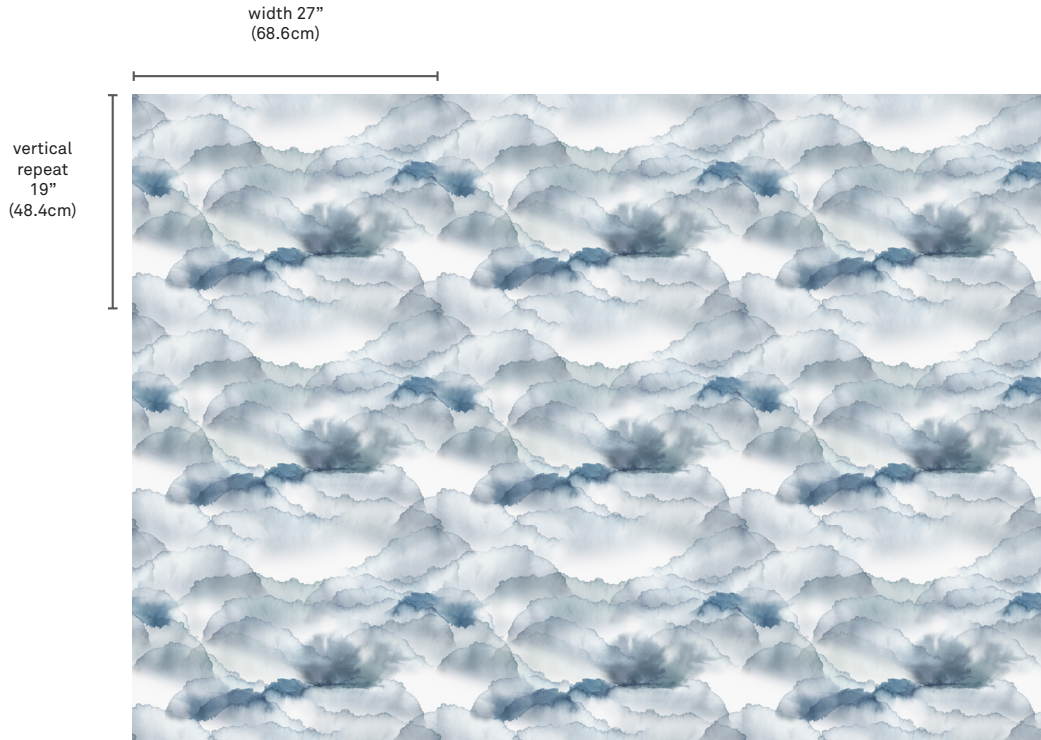

Installation instructions

Please read these instructions carefully before hanging this wallcovering. It is advisable that a professional decorator is used.

INSPECT EACH ROLL

- Before cutting and hanging this wallcovering, ensure that all rolls have the same batch reference, are in good condition, have no shade variation and that no other faults are present. Please ensure that there are enough rolls to complete the job.
- Examination before hanging is the buyer's responsibility. No claim can be accepted for hanging incorrect wallcoverings or for consequential loss. In the event of any complaint, please quote the design reference and batch number on this label and return any defective roll with its label to where it was purchased.
- **Do not assume that the wallcovering will come off the roll the correct way up. Refer to the pattern book, our website or check with the retailer.**
- Take extra care when papering around electric light switches and power points. Do not allow moisture to drip onto electrical contacts.

PREPARATION

- Walls should be clean, dry and even.
- Prepare wall by removing all traces of dirt, old wallpaper, or loose paint.
- Do not hang wallcoverings on any wall with a history of damp.
- Fill any cracks and allow to dry before hanging.
- Absorbent surfaces should be appropriately sized using a diluted wallpaper adhesive. Sealed walls, i.e. painted should be rubbed with sandpaper to create a 'key'.
- It is important that the walls are of an even and consistent colour. If they are not then consideration should be given to painting them with an appropriate colourwash. Alternatively, we recommend that walls be 'lined' horizontally using a good quality lining paper. Allow this to fully dry.

HANGING

- This is a 'paste the wall product'. The decorator should paste the wall and not the back of the wallcovering.
- We recommend the use of a light ready mixed adhesive. Evenly apply the adhesive directly onto the wall using a brush or a short pile emulsion roller.
- Paste should be evenly applied to the wall to

hang one length at a time, to an area slightly wider than the width of the roll.

- It is not necessary to pre-cut the lengths of paper as it can be applied direct from the roll. Apply the wallcovering to the wall and smooth down with a good quality hanging brush or plastic spatula.
- Do not overlap, use butt joints.
- **Carefully wipe any excess paste from the face of the paper immediately with a clean damp sponge before it dries.**
- After hanging 2 or 3 lengths, inspect the results to ensure that there is no shading or other fault.

No claims for hanging costs will be allowed for goods hung in excess of one roll.

This information has been supplied in good faith, but without guarantee. Site conditions are beyond our control. It is the responsibility of the buyer to ensure that the environment is suitable for the wallcovering.

www.emmahayestextiles.com