

EL60

ELECTRIC FIREPLACE



EL60




| | | |
|-------------------------|--|-------------|
| Application | Indoor | |
| Materials | Mild Steel with Polymer Satin Power-Coat, Tempered Glass | |
| Weight | 55.6kg [122.5lbs] (fire unit only) | |
| Colour & SKU | ■ Black | ESF.1.EL.60 |

TECHNICAL SPECIFICATION

| | |
|--------------------|-----------------|
| Type | Electric |
| Volts | AC 120V/60Hz |
| Amps | 13.4 Amps |
| Watts | 1530W |
| Low Heat | 750W |
| High Heat | 1500W |
| No Heater | 100W |
| Lamps | LED |
| Rotor Motor | AC 120V/60Hz 4W |

Read the manual carefully before operating. Physical model dimensions should be verified against cut out dimensions BEFORE installation begins to confirm tolerances align.

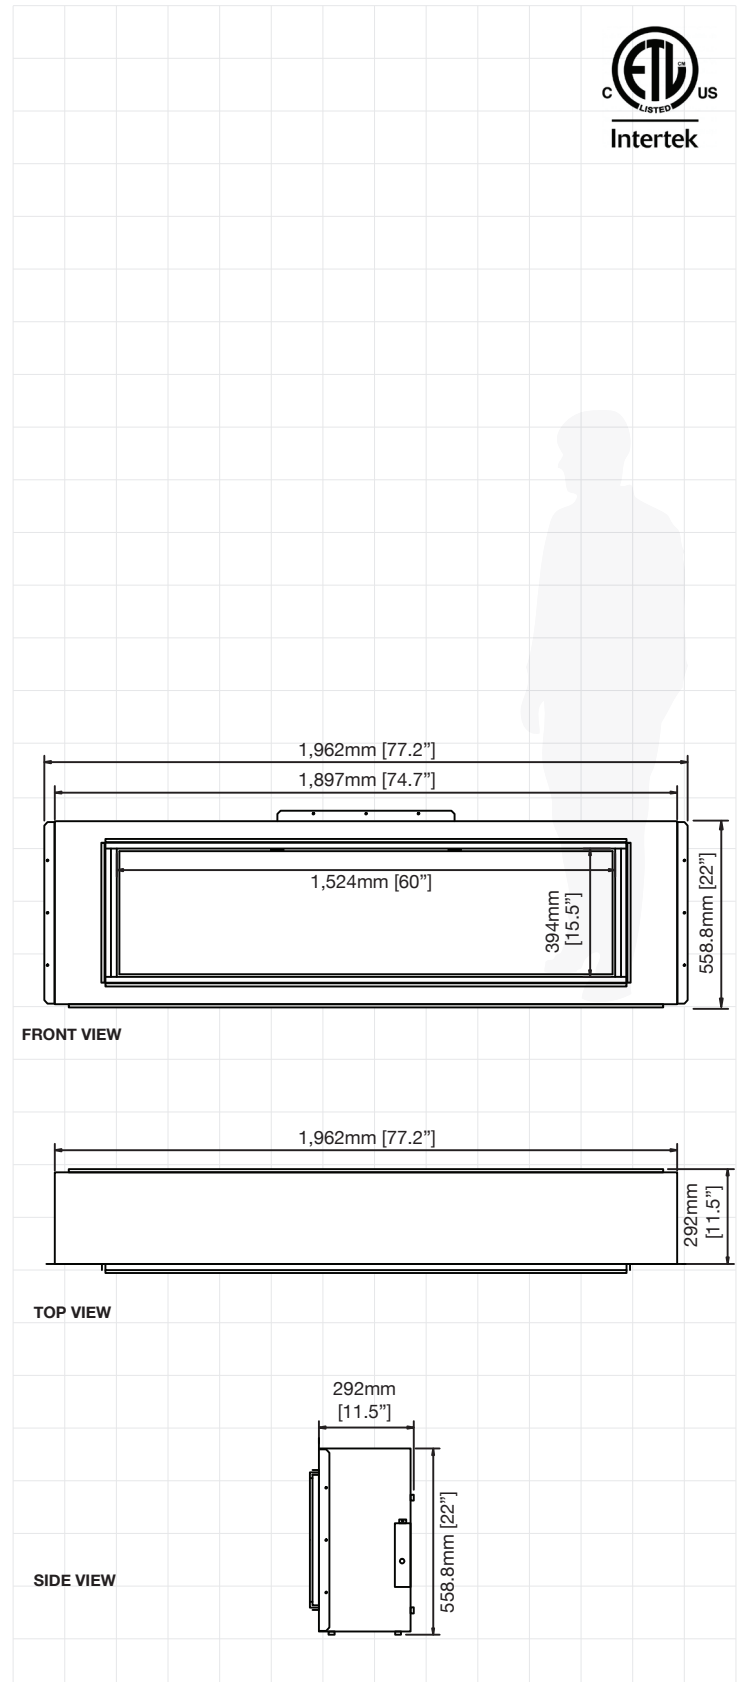

ELECTRIC FIREPLACES

FRAMING SPECIFICATIONS

Table A: FRAMING DIMENSIONS

Prepare the framed opening using wood or metal studs according to the table below.

| MODEL | W | H | D |
|-------|--------------------|--------------|----------------|
| EL40 | 55 3/4" 1416mm | 23" 584mm | 12" 304.8mm |
| EL60 | 75 3/4" 1924mm | 23" 584mm | 12" 304.8mm |
| EL80 | 95 3/4" 2432mm | 23" 584mm | 12" 304.8mm |
| EL100 | 115 3/4" 2940mm | 23" 584mm | 12" 304.8mm |
| EL120 | 135 3/4" 3448mm | 23" 584mm | 12" 304.8mm |


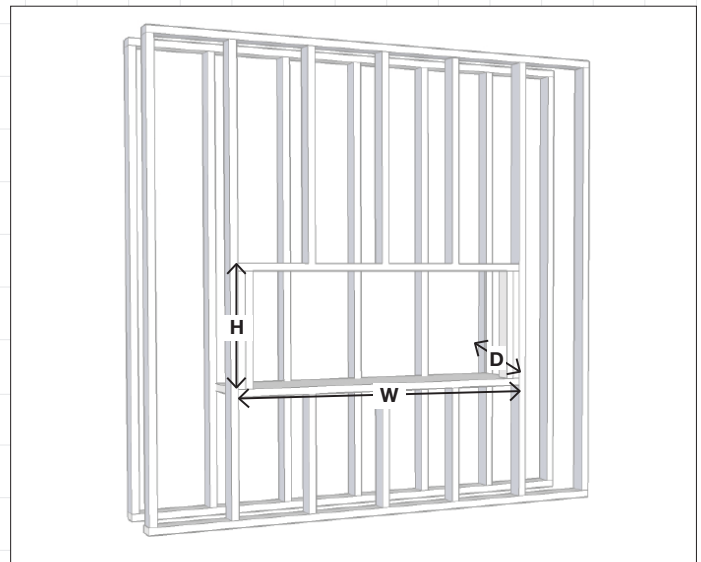


Table B: SURROUND / FINISHING DIMENSIONS

Prepare the finishing material around the viewing area according to the table below.

| MODEL | W | H | D |
|-------|-----------------------|--------------------|-----|
| EL40 | 42 5/8" 1,082.7mm | 16 5/8" 422.3mm | N/A |
| EL60 | 62 5/8" 1,590.7mm | 16 5/8" 422.3mm | N/A |
| EL80 | 82 5/8" 2,098.7mm | 16 5/8" 422.3mm | N/A |
| EL100 | 102 5/8" 2,606.7mm | 16 5/8" 422.3mm | N/A |
| EL120 | 122 5/8" 3,114.7mm | 16 5/8" 422.3mm | N/A |

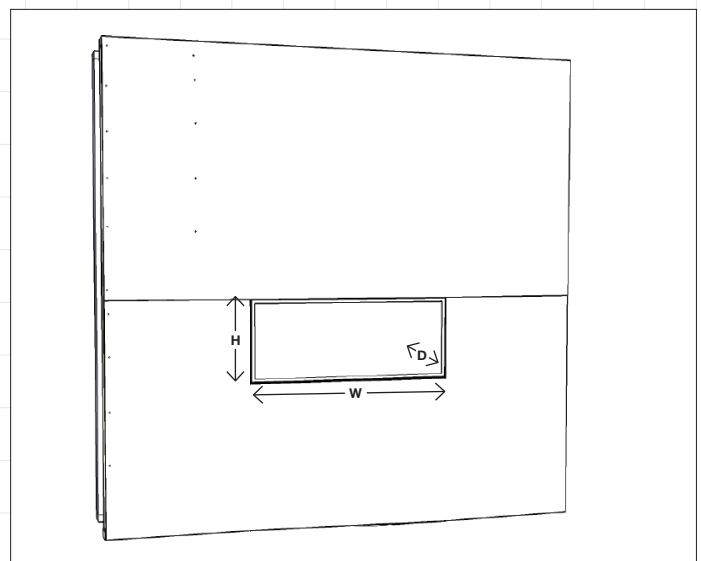

Physical model dimensions should be verified against cut out dimensions BEFORE cutting surround materials.