Built-in Flex Fireplaces



Flex Left Corner





ecosmartfire.com

Built-in Flex Fireplaces



Flex Left Corner Design features



Included Accessories



Jerry Can with Safety Spout & e-NRG bottle adaptor



Lighting Rod & Lighter

5. Single Room Application

Left Corner fireplaces feature

flame from the front and from

No Flue, No Chimney, No Vent

Fuelled by clean-burning e-NRG

bioethanol, our burners produce

a beautiful orange flame without

any smoke, soot or ash.

Forefront of Fireplace

Backed by 17 years of

research and development,

and third-party certification,

fuel ignition technologies.

These models comply with existing standards in the USA, Europe, UK and Australia. UL

*Decorative media is not to be placed directly on top of the burner or anywhere they can interfere with the operation of the burner or the

stability of flame.

Listed, EN 16647 BSI Certified,

ACCC Safety Mandate compliant.

Global Compliance

each model in the Flex series

features world-class safety and

Technology

two open sides - view the

the left corner



XL Baffles (XL Burners Only)



Black Glass Charcoal*

1	_		
U			

Glass Fire Screen/s

Optional Accessories



Decorative Steel Logs*

Disclaimer, All product specifications and data are subject to change without notice and believed to be correct at the time of publication. MAD Design Group (MDG), its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "MAD Design Group"), disclaim any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify MDG's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of MDG. Customers using or applications. Images are indicative ony.

1. Zero Clearance

Self-contained, zero clearance construction allows your Flex fireplace to be framed into wood or metal studs, providing installation freedom and flexibility for builders, architects, interior designers, landscapers and homeowners.

2. Decorative Side Box

Customise your fireplace design with a decorative box placed on one or more sides, and fill with your chosen noncombustible accessory.

Built to Last a Lifetime

Zinc sealed steel construction powder coated with super hi-temp black paint prevents rusting so all fireplaces can be used both indoors or outdoors.

Quick and Easy Installation

Requiring virtually no assembly, Flex Fireplaces are designed to be placed into the desired location, safely secured into position, and operated immediately.

3. Glass Fire Screen/s

The toughened glass fire screen stabilises the flame in windy conditions. The Integrated windscreen sits flush behind the frame.

No Connections

Light up outdoor spaces with a soft, alluring glow - easily and efficiently, without cumbersome connections.

4. Colours

Available in a timeless black finish, Flex Fireplaces come with Stainless Steel or Black burners.



Built-in Flex Fireplaces



Flex 104LC Specifications

Burner Ventilation and Efficiency*					Construction			
							\longleftrightarrow	
Flex Model	Compatible Burner	Fuel Capacity	Heats on Average (Indoors)	Approx. Burn Time	Minimum Room Size	Viewing Area Size	Minimum Wall Length	
104LC	XL1200 x 2	10 L [2.6 Gals] x 2	Over 130 m ² [1,400 ft ²]	9 - 14 hours	230 m³ [8,122 ft³]			
104LC.BXL 104LC.BXR	XL900 x 2	9 L [2.4 Gals] x 2	Over 120 m ² [1,290 ft ²]	8 - 13 hours	220 m³ [7,768 ft³]	2,645mm [104in]	2,855mm [112in]	
104LC.BX2	XL1200	10 L [2.6 Gals]	Over 65 m ² [700 ft ²]	9 - 14 hours	115 m³ [4,061 ft³]			
Awards		n Best Award (US s Choice Award	,					
Application	Indoor & Outdo	oor			Flex 104LC			
Surround Colour	Black							
Burner Colours Options	Stainless Steel							
Materials	Toughened Gla	c Sealed) Hi-tem ass, Grade 304 S ptional Black Cer	tainless Steel		Flex 104LC.BXL			
Approx. Weight	104LC 149.5kg 104LC.BXL &	g [328.9lbs] 104LC.BXR 145	.4kg [319.9lbs]					



Flex 104LC.BXR



Flex 104LC.BX2

*These values are indicative only and may vary depending on the model purchased, installation, and the seasonal resource used to manufacture e-NRG.

Physical model dimensions should be verified against cut out dimensions BEFORE installation begins to confirm tolerances align.

104LC.BX2 146.9kg [323.2lbs]

e-NRG Bioethanol / e-NRG.com

Weight includes burner/s, black glass charcoal, fire screen.

These models comply with existing standards in the USA, Europe, UK and Australia. UL Listed, EN 16647 BSI Certified and ACCC Safety Mandate compliant.

FOR MORE INFORMATION PLEASE REFERENCE THE CLEARANCE & INSTALLATION MANUAL

Disclaimer. All product specifications and data are subject to change without notice and believed to be correct at the time of publication. MAD Design Group (MDG), its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "MAD Design Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product. MDG disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify MDGs terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of MDG. Customers using or applications. Images are indicative only.

Fuel Type

Flex 104LC

ESF.FX.104LC (Flame only)

ESF.FX.104LC.BXL

ESF.FX.104LC.BXR

(Right Decorative Box)

ESF.FX.104LC.BX2


(Left & Right Decorative Box)


(Left Decorative Box as Illustrated)

Physical model dimensions should be verified against cut out dimensions BEFORE installation begins to confirm tolerances align.




[109.9] 2791 [106.0] 2691 [5.1] 130 19.8] 502 [6.8] 172 [102.8] <u>ത</u> [31. 807 2610 [6.9] 175

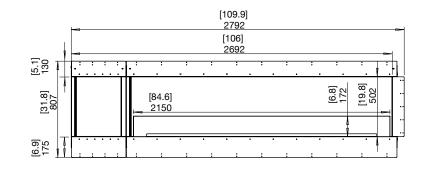

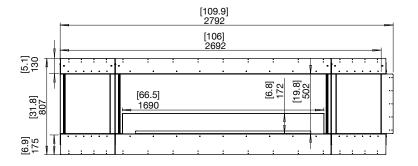

Side View



FOR MORE INFORMATION PLEASE REFERENCE THE CLEARANCE & INSTALLATION MANUAL

Disclaimer. All product specifications and data are subject to change without notice and believed to be correct at the time of publication. MAD Design Group (MDG), its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "MAD Design Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product. MDG disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify MDGs terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of MDG. Customers using or applications. Images are indicative only.