Built-in Flex Fireplaces



Flex Left Corner





ecosmartfire.com

Built-in Flex Fireplaces



Flex Left Corner Design features



Included Accessories



Jerry Can with Safety Spout & e-NRG bottle adaptor



Lighting Rod & Lighter

5. Single Room Application

Left Corner fireplaces feature

flame from the front and from

No Flue, No Chimney, No Vent

Fuelled by clean-burning e-NRG

bioethanol, our burners produce

a beautiful orange flame without

any smoke, soot or ash.

Forefront of Fireplace

Backed by 17 years of

research and development,

and third-party certification,

fuel ignition technologies.

These models comply with existing standards in the USA, Europe, UK and Australia. UL

*Decorative media is not to be placed directly on top of the burner or anywhere they can interfere with the operation of the burner or the

stability of flame.

Listed, EN 16647 BSI Certified,

ACCC Safety Mandate compliant.

Global Compliance

each model in the Flex series

features world-class safety and

Technology

two open sides - view the

the left corner



XL Baffles (XL Burners Only)



Black Glass Charcoal*

1	_		
U			

Glass Fire Screen/s

Optional Accessories



Decorative Steel Logs*

Disclaimer, All product specifications and data are subject to change without notice and believed to be correct at the time of publication. MAD Design Group (MDG), its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "MAD Design Group"), disclaim any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify MDG's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of MDC. Customers using or applications. Images are indicative ony.

1. Zero Clearance

Self-contained, zero clearance construction allows your Flex fireplace to be framed into wood or metal studs, providing installation freedom and flexibility for builders, architects, interior designers, landscapers and homeowners.

2. Decorative Side Box

Customise your fireplace design with a decorative box placed on one or more sides, and fill with your chosen noncombustible accessory.

Built to Last a Lifetime

Zinc sealed steel construction powder coated with super hi-temp black paint prevents rusting so all fireplaces can be used both indoors or outdoors.

Quick and Easy Installation

Requiring virtually no assembly, Flex Fireplaces are designed to be placed into the desired location, safely secured into position, and operated immediately.

3. Glass Fire Screen/s

The toughened glass fire screen stabilises the flame in windy conditions. The Integrated windscreen sits flush behind the frame.

No Connections

Light up outdoor spaces with a soft, alluring glow - easily and efficiently, without cumbersome connections.

4. Colours

Available in a timeless black finish, Flex Fireplaces come with Stainless Steel or Black burners.





Flex 122LC Specifications

Burner Ventilation and Efficiency*				Construction			
							\longleftrightarrow
Flex Model	Compatible Burner	Fuel Capacity	Heats on Average (Indoors)	Approx. Burn Time	Minimum Room Size	Viewing Area Size	Minimum Wall Length
122LC	XL900 x 3	9 L [2.4 Gals] x 3	Over 180 m² [1,935 ft²]	8 - 13 hours	330 m ³ [11,652 ft ³]		
122LC.BXL 122LC.BXR	XL1200 x 2	10 L [2.6 Gals] x 2	Over 130 m ² [1,400 ft ²]	9 - 14 hours	230 m ³ [8,122 ft ³]	3,100m [122in]	3,315mm [131in]
122LC.BX2	XL900 x 2	9 L [2.4 Gals] x 2	Over 120 m² [1,290 ft²]	8 - 13 hours	220 m³ [7,768 ft³]		
Awards	2020 BIMsmith Best Award (USA) 2018 Attendees Choice Award (USA)						
Application	Indoor & Outdoor			advidensibiskos, advidensibiskos, idvidensibiskos,			
Surround Colour	Black			Flex 122LC			

Burner Colours Options	Stainless Steel			
Materials	Mild Steel (Zinc Sealed) Hi-temp Powder-coat, Toughened Glass, Grade 304 Stainless Steel Burner, with optional Black Ceramic Coating			
Approx. Weight	122LC 171.5kg [377.3lbs] 122LC.BXL & 122LC.BXR 173.4kg [381.5lbs] 122LC.BX2 169.1kg [372lbs] Weight includes burner/s, black glass charcoal, fire screen.			

Fuel Type e-NRG Bioethanol / e-NRG.com

Flex 122LC.BXR

Flex 122LC.BXL

Flex 122LC.BX2

*These values are indicative only and may vary depending on the model purchased, installation, and the seasonal resource used to manufacture e-NRG.

Physical model dimensions should be verified against cut out dimensions BEFORE installation begins to confirm tolerances align.

These models comply with existing standards in the USA, Europe, UK and Australia. UL Listed, EN 16647 BSI Certified and ACCC Safety Mandate compliant.

FOR MORE INFORMATION PLEASE REFERENCE THE CLEARANCE & INSTALLATION MANUAL


Disclaimer. All product specifications and data are subject to change without notice and believed to be correct at the time of publication. MAD Design Group (MDG), its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "MAD Design Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product. MDG disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify MDGs terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of MDG. Customers using or applications. Images are indicative only.

manute de la contraction de la


huddenhets additioned

Flex 122LC

Physical model dimensions should be verified against cut out dimensions BEFORE installation begins to confirm tolerances align.

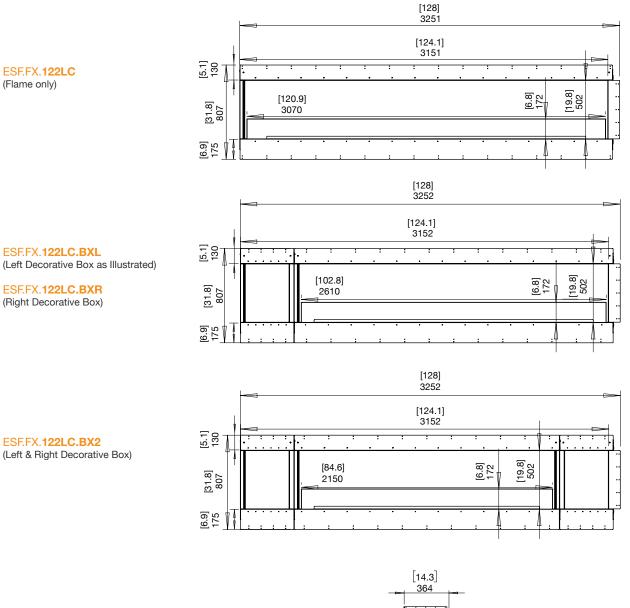

Side View



FOR MORE INFORMATION PLEASE REFERENCE THE CLEARANCE & INSTALLATION MANUAL

Disclaimer. All product specifications and data are subject to change without notice and believed to be correct at the time of publication. MAD Design Group (MDG), its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "MAD Design Group"), disclaim any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum edent permitted by law. The product specifications do not expand or otherwise modify MDGs terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products. No license, express or implied, by estopped or otherwise, to any intellectual property rights is granted by this document or by any conduct of MDG. Customers using or selling MDE products not expression indicated for use in such applications do so entirely at their own risk and agree to fully indemnify MDG for any damages arising or resulting from such use or sale. Please contact authorised personnel from MDG to obtain written terms and conditions regarding products designed for such applications. Images are indicative only.

ecosmar+™ Fire