



## Multi-Fire® SL

50" Slim Linear Electric Fireplace

PLF5014-XS

Enhance your room with a fireplace without compromising your living space.




With an incredibly shallow four inch depth, the Slim Linear lets builders, designers, property managers and homeowners incorporate a stylish, linear fireplace where space is limited, like condos, townhouses or for easy renovation projects without the need to build out from an existing wall. The Slim Linear electric fireplace sits flush into 2" x 4" framing - a game-changing and industry exclusive design.







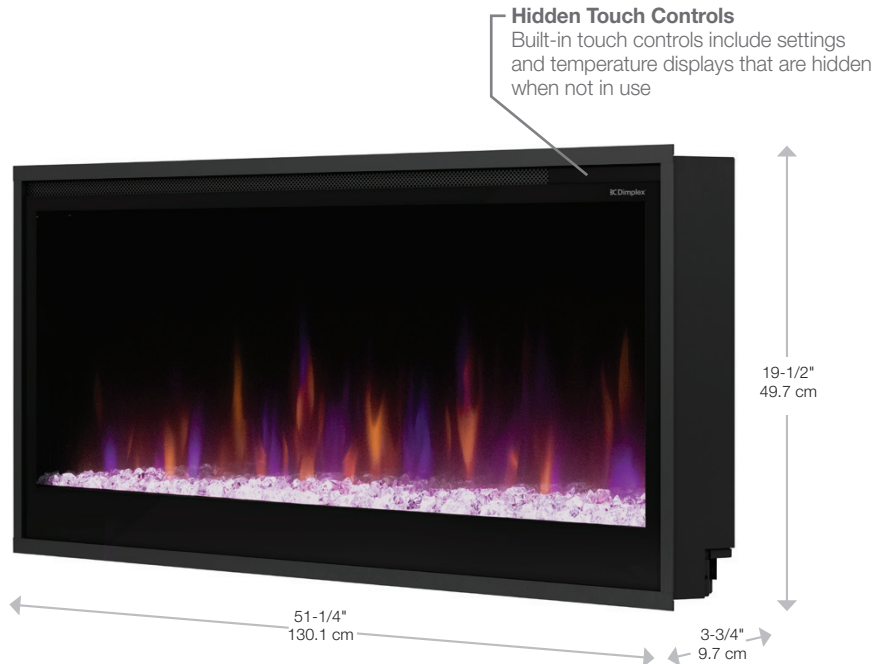



MULTI-FIRE® SL  
by Dimplex

## Multi-Fire® SL 50" Slim Linear Electric Fireplace


## PLF5014-XS



### Features

-  **Multi-Fire® SL Effect**  
Large, high-contrast flames feature a multi-layered color effect that creates a sense of depth. Color settings can be controlled independently or combined in one of the five preset options.
-  **Media Accent Colors**  
Choose from a variety of brilliant color themes or cycle through a range of colors using the custom mode, freezing on the hue of your choice.
-  **Customizable Flame**  
The Multi-Fire technology allows you to adjust the speed of the flame to create the perfect atmosphere to suit your mood or room.
-  **Full Viewing Area**  
A slim size doesn't mean sacrifice. This smart design delivers an impressive viewing height of 14" and includes mirror technology that creates a grand illusion of depth.
-  **Slim Design**  
Installs flush into a 2"x4" wall for a seamless look or can be wall mounted (bracket included) for quick and easy installation.
-  **Flush Framing**  
Removable factory-installed trim allows finish material right to the edge for a clean, flush finish.
-  **Air Circulation Mode**  
A smart feature that moves room air to keep it fresher.
-  **Built-in Timer**  
Automatically turns the unit off after up to 8 hours.
-  **Heat Management**  
Enjoy the ambiance of a fire during the warmer months by deactivating the heater via the controls or hard disconnect the heater during installation when heat is not required.
-  **Smart Self-Diagnostics**  
Integrated smart technology that works behind the scenes to enhance the performance of your fireplace by providing maintenance and operation feedback.

### Media Bed Color Themes



120 Volts | 1,500 Watts | 5,000 BTU | 12.5 Amps

Model #	Description	Lbs/Kg	UPC	Wty.	Carton Dimensions (WxHxD)		Cube	
					inches	cm	Ft³	M³
PLF3614-XS	36" Linear Fireplace		781052 137318					
PLFXSPUG	Plug Kit		781052					

Specifications, finishes and dimensions are subject to change. \*Limited warranty. ©2020 Glen Dimplex Americas.


SE-568-R00-102920

# Multi-Fire<sup>®</sup> SL

## 50" Slim Linear Electric Fireplace

PLF5014-XS


### Product Dimensions:

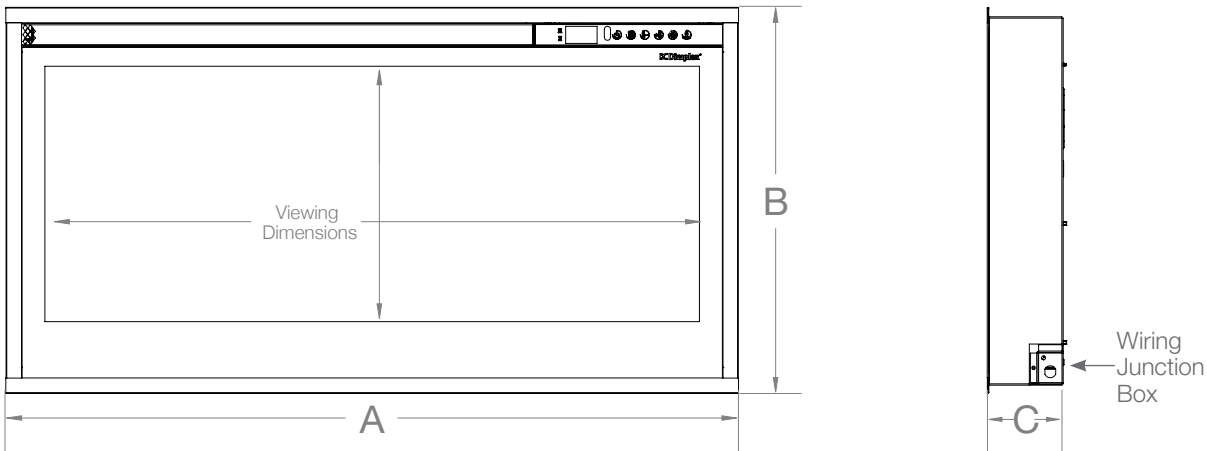


Product	A WIDTH (in/cm)	B HEIGHT (in/cm)	C DEPTH (in/cm)	VIEWING DIMENSION - WxH (in/cm)
PLF5014-XS	51-1/4 (130.1)	19-1/2 (49.7)	3-3/4 (9.7)	47-1/4 x 13 (120.1 x 33.0)

### Framing

#### Installation - 2 Mounting Options

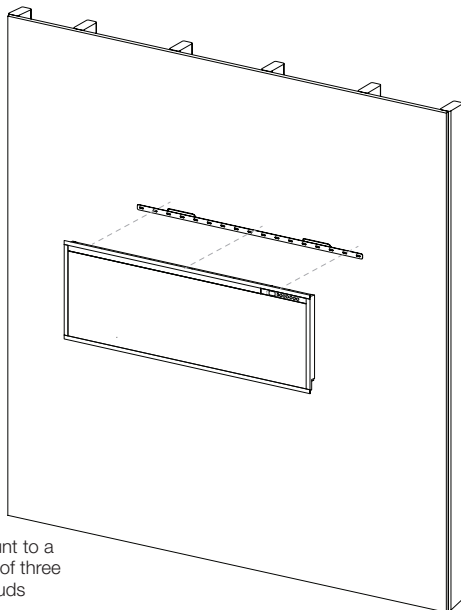

Must mount to a minimum of three (3) wall studs

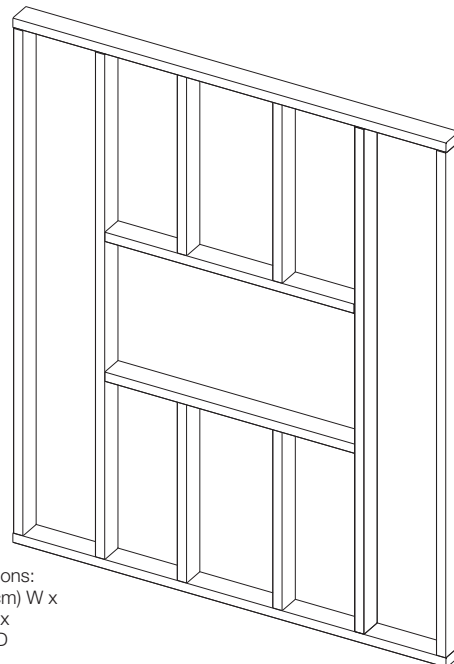

2 x 4 Framing  
Framing dimensions:  
50-1/2" (128.3 cm) W x  
19" (48.3 cm) H x  
3-1/2" (8.9 cm) D

**NOTE:**  
The Firebox is not load bearing. Do not stack weight of the frame on top of the firebox.  
It is recommended that the bottom of the unit be mounted between 20 in. (50.8 cm) and 40 in. (101.6 cm) from the ground to maintain an optimized viewing angle of the flame.