

LOG PLACEMENT GUIDE FOR THE BENNETT

DESIGN-MEDIA-14PCE



1. Rear Log Left, 2. Rear Log Right, 3. Left Top Cross Log
4. Right Top Cross Log, 5. Right Front Bottom Log
6. Left Front Bottom Log, 7. Optional Front Log Left
8. Optional Front Log Right

Before you begin:

Read the instructions carefully and refer to the images. Do not use broken logs.

You will find there are more log set pieces in the box than can be used. Every precaution has been taken to ensure the log sets are not damaged in transit – but in the event that there is some breakage there will be extra pieces to use in their place.

WARNING: Improper positioning of the logs may create carbon build-up and can alter the units performance which is not covered under warranty.



Black fire glass



90-piece pebble



9-piece rocks

1. Shut off gas and electrical supply and allow the unit to cool to room temperature.
2. Remove glass and safety barrier
3. Carefully open Designer Media Kit box and gently remove the logs and media. The logs are fragile.




4. Add the desired amount of black fireglass and/or pebble decorative media to the burner tray.



5. Install Rear Log Left (1) by positioning cut out around pilot. Ensure cut out is centered as shown.



6. Install Rear Log Right (2) to the right of Log 1 as shown.

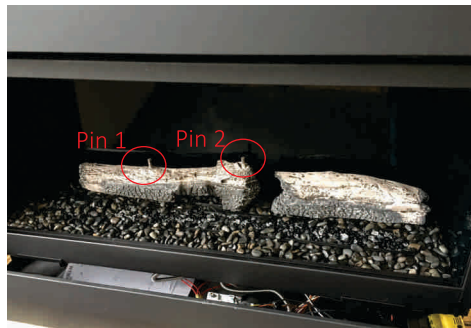

Rear logs 1 and 2 in place. Note Pins 1 and 2.



7. Line up top hole in Left Top Cross Log (3) to Pin 1 on Left Rear Log as shown.



Install Tip:

Locate and use provided log placement template for the Bennett.

LOG PLACEMENT GUIDE FOR THE BENNETT



Log 3 pinned in place.



8. Line up top hole in Right Top Cross Log (4) to Pin 2 on Left Rear Log as shown.



Log 4 pinned in place



9. Place Right Front Bottom log (5) under Log 4 as shown. Note: This log placement is important in order to raise log 4 up crossing the flame in order to reduce risk of soot.



Log 5 placed under Log 4.




10. Place left front Right Log (6) under Log 3. Note: This log placement is important in order to raise log 3 up crossing the flame in order to reduce risk of soot.



11. Optional Front Log (7) placed in the front.




12. Optional Front Log (8) placed in forward direction on top of log 5.

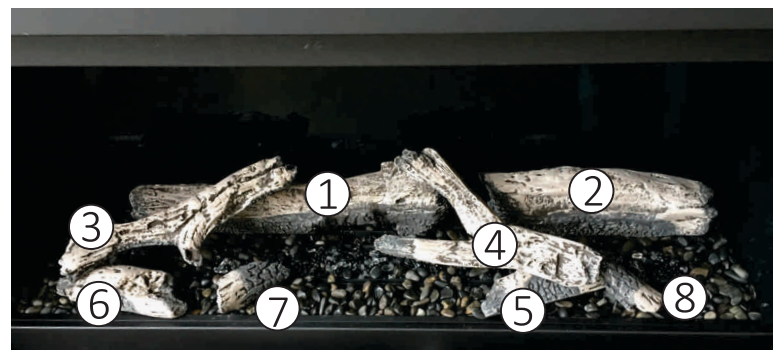

Completed Installation shown with 8 logs.



embers 1



embers 2



embers 3



embers 4

Install decorative vermiculate embers over glass and pebbles as desired.