

PROVEN PERFORMANCE RESULTS

Attribute	EvenGLO®		Top Competitor
	High	Low	
Operation	Two-Stage		Single Stage
BTU/HR	53,000	46,000	50,000
Heated Area 63° F and Higher*	152.7ft ²	137.9ft ²	96.6ft ²
Amount of Energy Used (Btu/ft ²)	351	329	531

Note: Independently tested (Source: <http://www.fishnick.com/publications/appliancereports/heaters>)
 *The useful output is specified as the area under and around the heater having a mean radiant temperature rise of at least 3°F in a design environment of 60°F

58% MORE HEAT COVERAGE



GA201M2
PORTABLE

GA301 (M&MP)
PORTABLE

GA301 (U&T)
FIXED

GA301H
HANGING



HEAT • STYLE • LUXURY




ALL PRODUCTS MADE IN CANADA



LUXURY PATIO HEATERS

evenGLO® COLLECTION

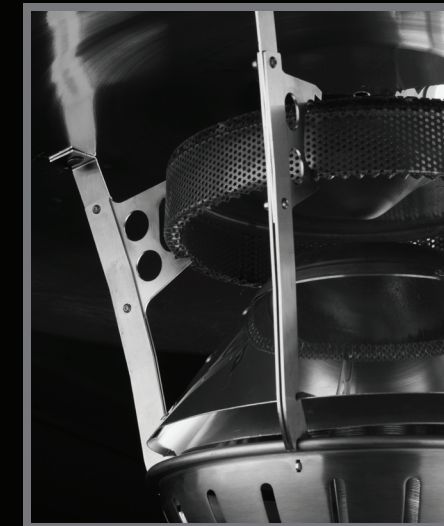

MADE IN CANADA
PATENTED DESIGN & TECHNOLOGY
HIGHEST QUALITY STANDARDS