


CHARLIE

Pendant Control Station

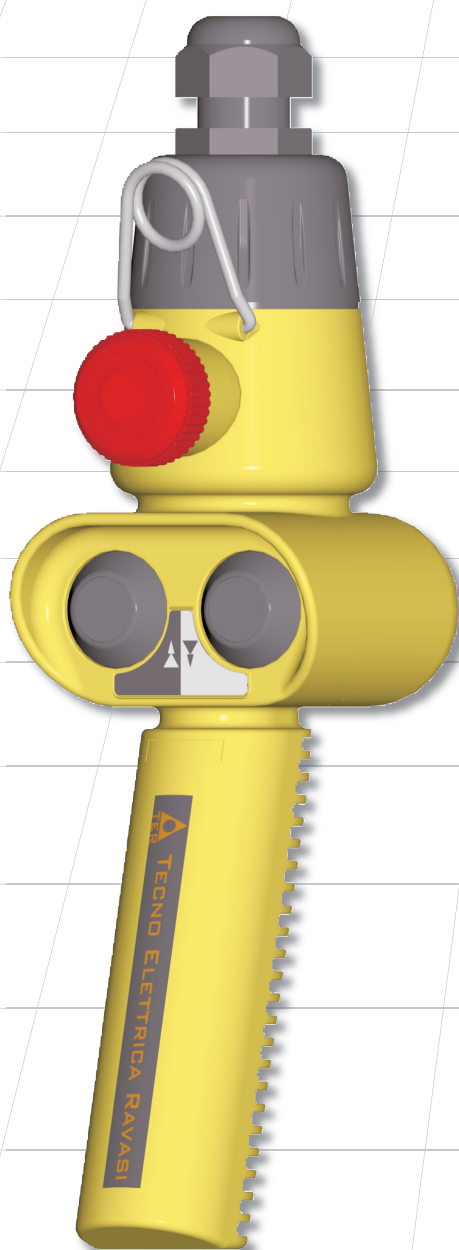


**INDUSTRIAL
POWER & CONTROL**

ENERGY SOLUTIONS FOR CRANES, HOISTS & MONORAILS



I N N O V A T I O N P A R T N E R


CHARLIE

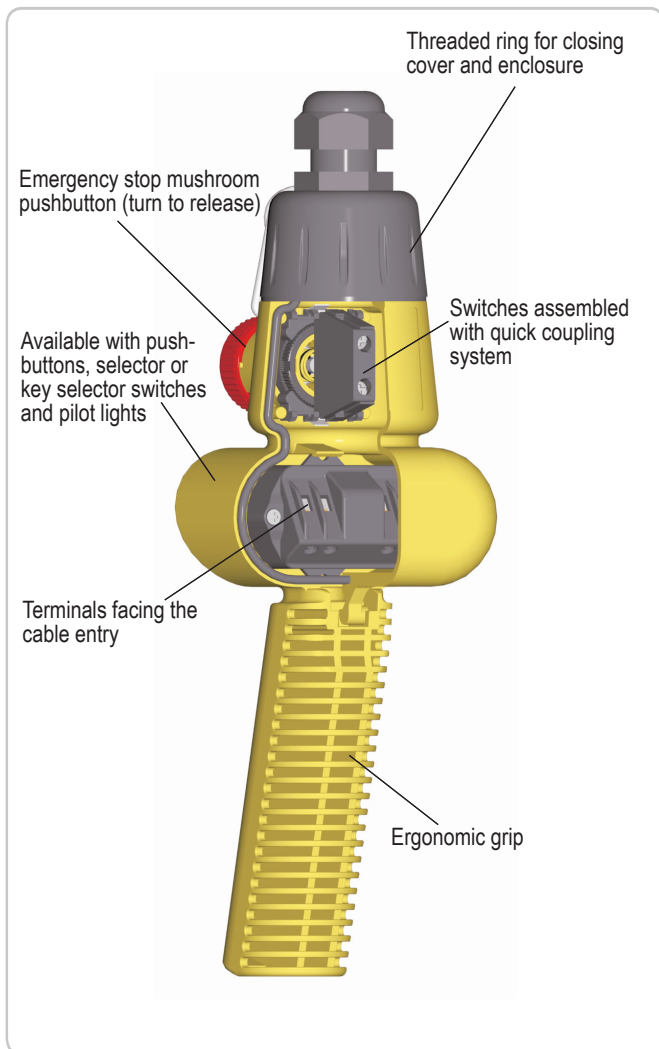

Technical specifications

Operational temperature	-25°C / +70°C
Degree of protection	IP 65
Insulation category	Class II
Rated operational current	3 A
Rated operational voltage	250 Vac
Mechanical life	0.5x10 ⁶ operations
Markings	Enclosure CE Switches CE, UL, cUL

Overall dimensions

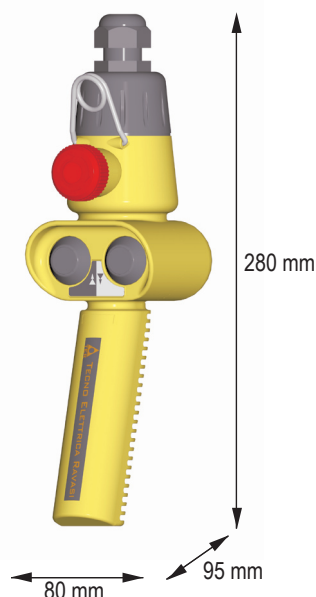


Product features

- Symbols, versions and enclosure colour can be customised.
- 1 or 2 speed double switches with integrated electrical interlock.
- 1NO or 1NC single switches with quick coupling system.
- Threaded ring for quick closing without need for screws.
- Further information available on the technical documentation PRCA0EAF00.

The data and the products illustrated in this brochure may be modified without notice. Under no circumstances can their description have a contractual value.


ALPHA

Pendant control station

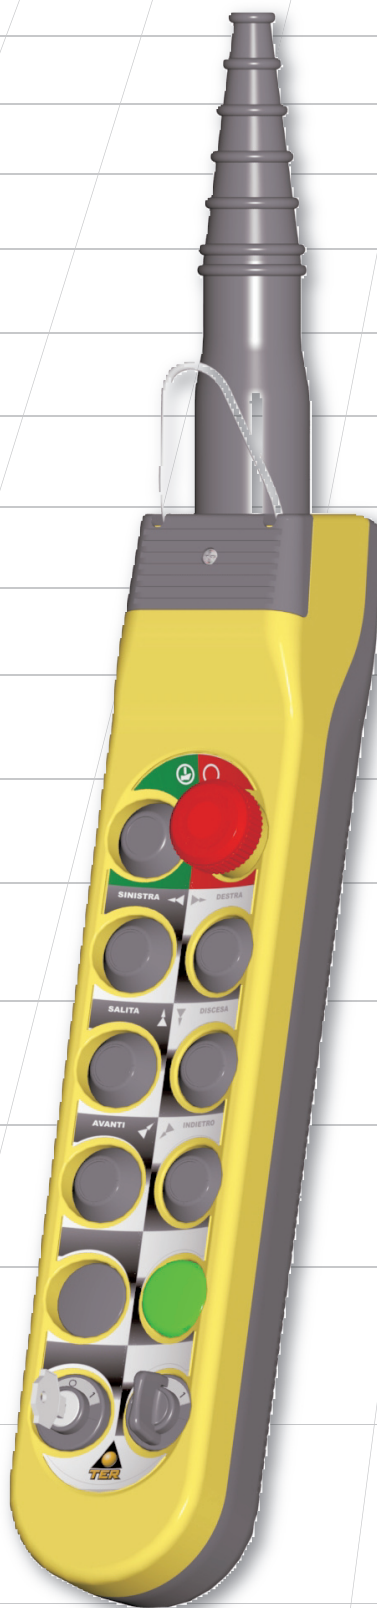

I N N O V A T I O N P A R T N E R


ALPHA

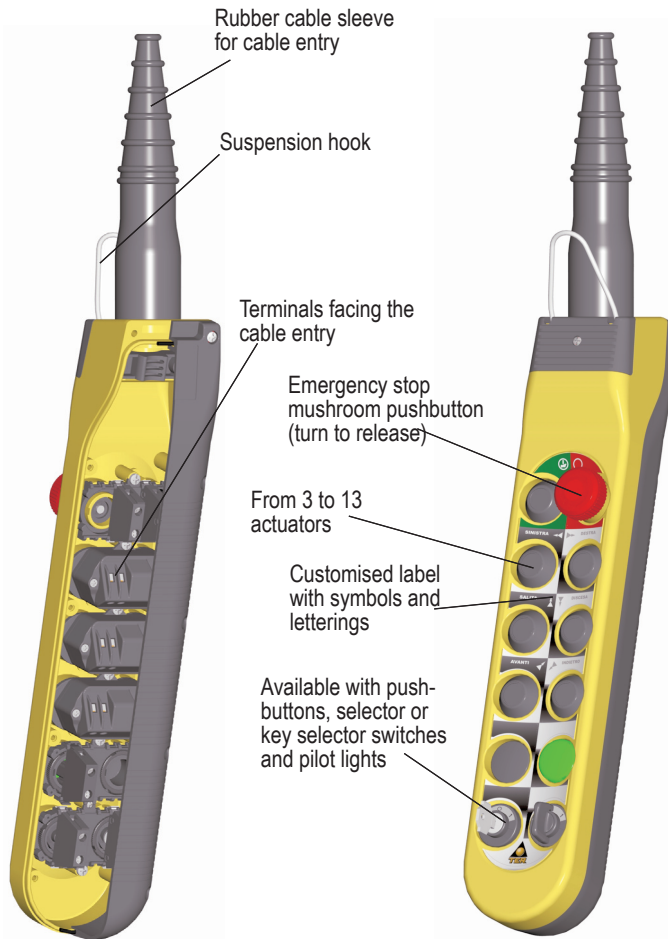

Technical specifications

Operational temperature	-25°C / +70°C
Degree of protection	IP 65
Insulation category	Class II
Rated operational current	3 A
Rated operational voltage	250 Vac
Mechanical life	0.5x10 ⁶ operations
Markings and homologations	Enclosure CE, cCSAus Switches CE, UL, cUL

Overall dimensions

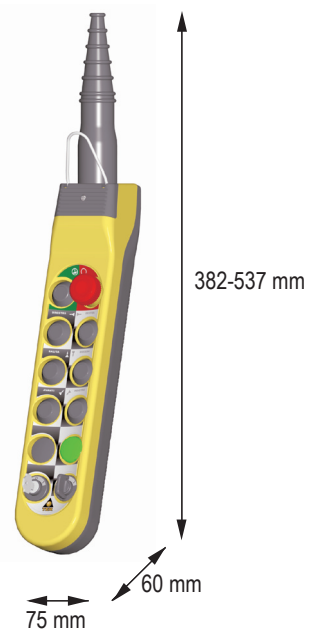


Product features

- 1 or 2 speed double switches with integrated electrical interlock.
- 1NO or 1NC single switches with quick coupling system.
- The enclosure can be customised with different colours.
- Further information available on the technical documentation PRCA0EAD00.

The data and the products illustrated in this brochure may be modified without notice. Under no circumstances can their description have a contractual value.

NPA

Pendant control station

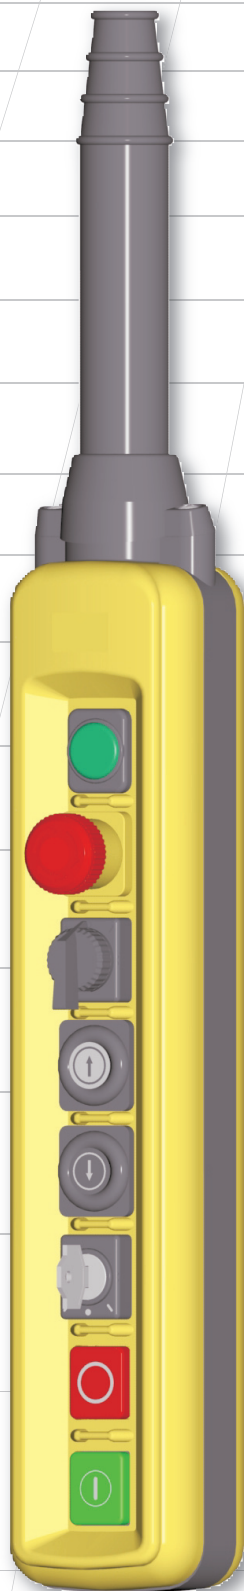

I N N O V A T I O N P A R T N E R

NPA


Rubber cable sleeve
for cable entry

Emergency stop
mushroom pushbutton
(turn to release)

Available with pushbuttons,
selector or key selector
switches and pilot lights

From 2 to 12
actuators


Double two-colour
injection moulded
buttons

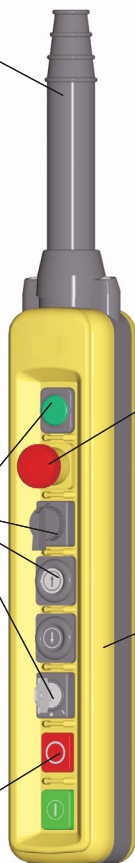

Technical specifications

Operational temperature	-25°C / +70°C
Degree of protection	IP 65
Insulation category	Class II
Rated operational current	1.9 A
Rated operational voltage	250 Vac
Mechanical life	0.5x10 ⁶ operations
Markings	Enclosure CE Switches CE, UL, cUL

Overall dimensions

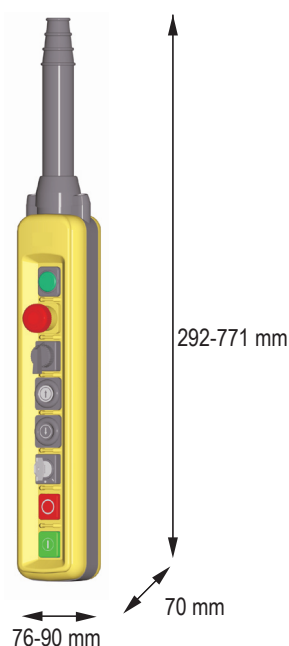


Product features

- Customised symbols and assemblies.
- 1, 2 or 3 speed switches with up to 3 NC and/or NO contacts for each actuator.
- Available with dust-proof rubber pushbuttons.
- Available for direct control with dust-proof rubber pushbuttons ($P_e = 2.2 \text{ KW}$, $U_e = 400 \text{ Vac}$, $I_g = 20\text{A}$).
- Further information available on the technical documentation PRCA0EA100.

The data and the products illustrated in this brochure may be modified without notice. Under no circumstances can their description have a contractual value.

SPA

Pendant control station

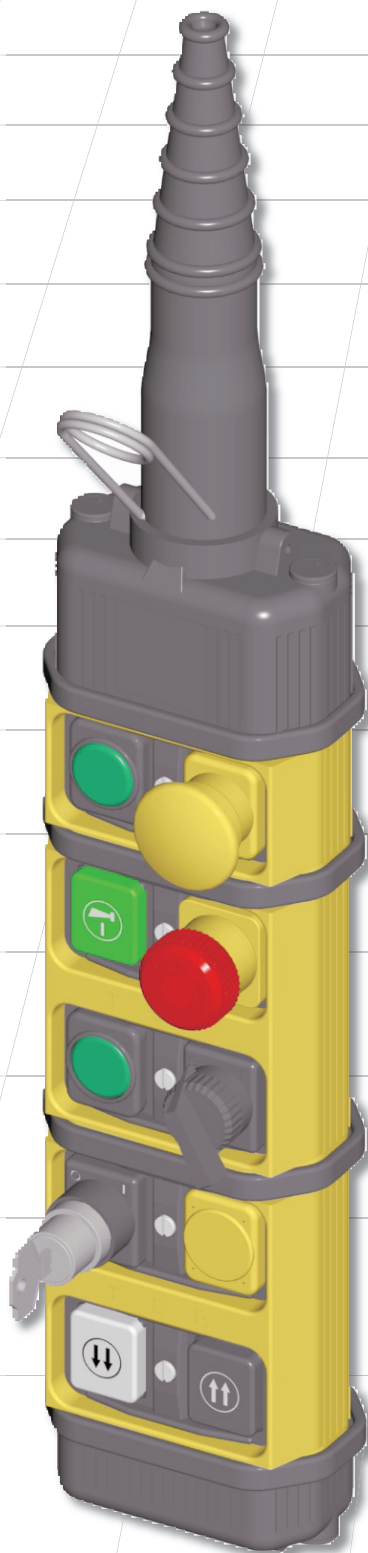


SPA

Technical specifications

Operational temperature	-25°C / +70°C
Degree of protection	IP 65
Insulation category	Class II
Rated operational current	1.9 A
Rated operational voltage	380 Vac
Mechanical life	0.5x10 ⁶ operations
Markings	CE

Overall dimensions

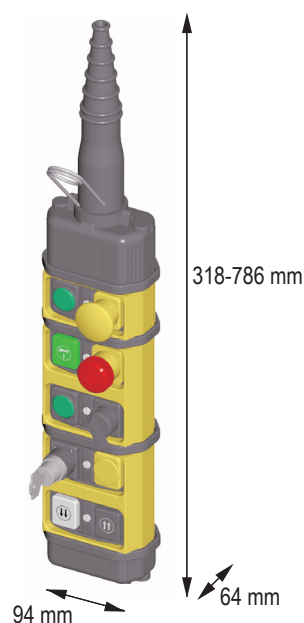

Rubber cable sleeve for cable entry

Suspension hook

Emergency stop mushroom pushbutton (turn to release)

From 2 to 20 actuators

Available with push-buttons, selector or key selector switches and pilot lights

Product features

- Customised symbols and assemblies.
- Thermoplastic rectangular pushbuttons featuring wear resistant texts and symbols thanks to the double two-colour injection moulding procedure.
- 1 or 2 speed switches with up to 4 NC and/or NO contacts for each actuator.
- Further information available on the technical documentation PRCA0EAR00.

The data and the products illustrated in this brochure may be modified without notice. Under no circumstances can their description have a contractual value.



ENERGY SOLUTIONS FOR CRANES, HOISTS & MONORAILS

Toll Free: 1.888.822.2024
 International: 1.519.822.2020
 Fax: 1.519.822.2140
 Email: info@ipandc.com
 Web: www.ipandc.com