



WEVER & DUCRÉ
LIGHTING

TOWNA 1.0

178184K3

Project
Type
Notes
Quantity
Date

GENERAL

Ceiling
 Surface
 Jet Black + Gold
 IP44
 Interior
 730 lm

LED



2700 K
 CRI 90
 L80 B50 / 60000h
 3-step binning

PHYSICAL


Diameter 254 mm
 Height 89 mm
 1.15 kg

ELECTRICAL

phase-cut dim
 220 - 240 V
 Total connected power 12.5 W
 PC1
 Safety distance 0.3 m

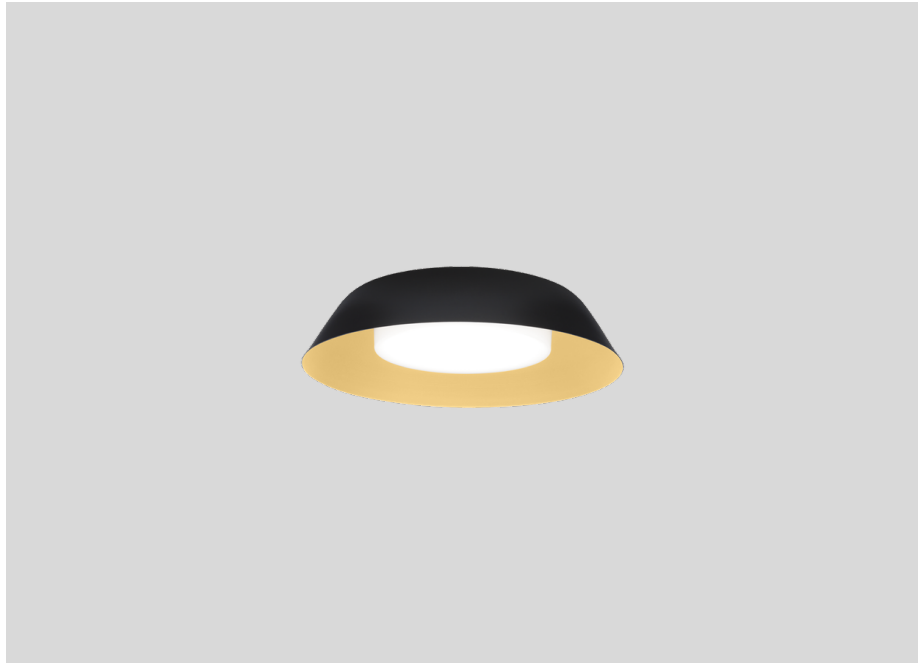

LIGHT DISTRIBUTION



[178184K3] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BVBA apply.
 © Wever & Ducré BVBA · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com



WEVER & DUCRÉ
LIGHTING

TOWNA 1.0

178184K3

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.99	0.97	0.95	0.94	0.92
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Electrical

DIMMER

TYPE	COLOUR	L · W · H (MM)	ORDERCODE
DIMMER FOR SWITCH	Black	18-48-46	9 0 0 1 9 0 1 7
DIMMER DIN RAIL	White	55-17-90	9 0 0 1 9 0 1 8