



PART NUMBER: 1992-7012-01

2019 Ford Ranger


RTR Fender Vents




Components Included

- | | |
|-----------------------|---|
| 1. RTR Fender Vent RH | 1 |
| 2. RTR Fender Vent LH | 1 |
| 3. Fender Vent Gasket | 2 |

NOTE: In addition to common hand tools, this installation requires the use of a plastic, no-scratch, pry tool, painters tape, isopropyl alcohol and black spray paint (optional).

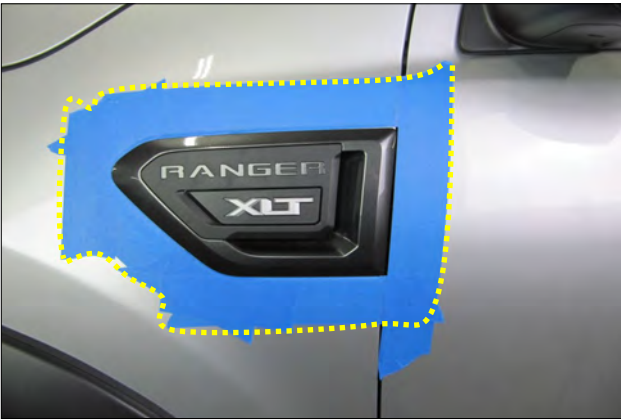

1. Prepare the vehicle for OEM vent removal by placing a protective layer of painters tape on the fender, as shown.

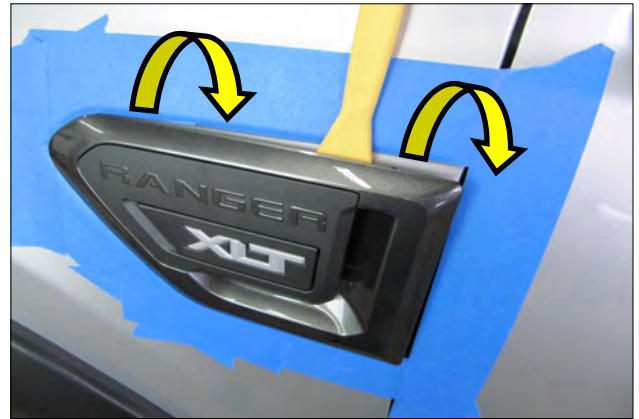


2. Using a no-scratch pry tool, carefully pry the OEM vent out of the fender.




3. Prepare the RTR vent for gasket installation by wiping the edge down with a clean towel and isopropyl alcohol.




4. Remove the adhesive backer from the gasket strip and apply it to the edge of the RTR vent as shown.

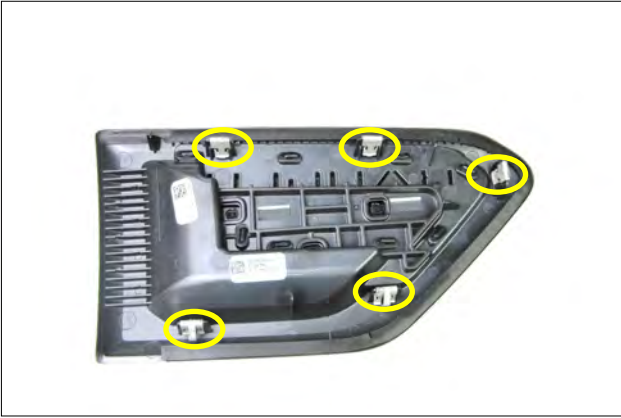

The RTR vent will reuse the 5 OEM vent clips.

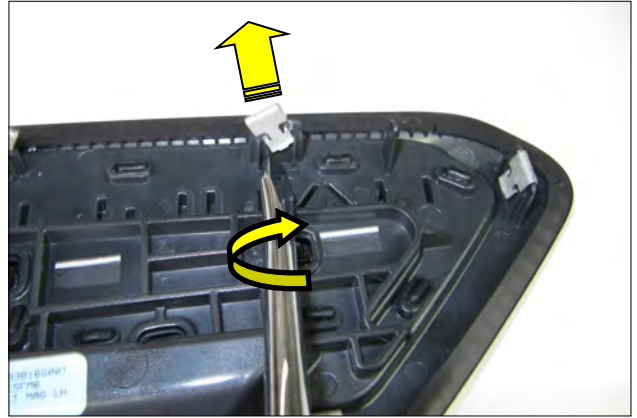

5. Using a 5/16" standard blade screwdriver or equivalent, carefully pry the clips off of the OEM vent.

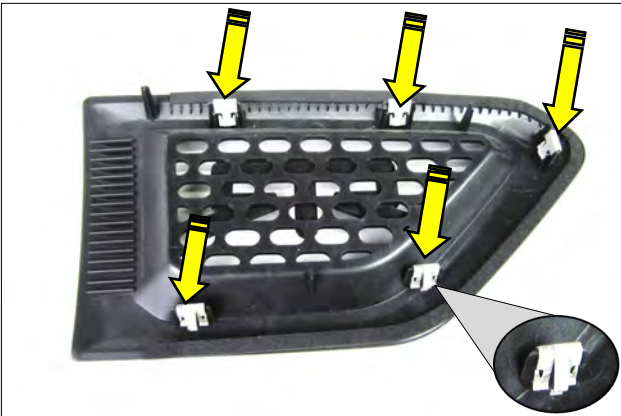

6. Transfer the OEM clips from step 6. onto the RTR vent as shown, with the large protrusion facing outwards.



7. **Install Option:** Place additional painters tape around the fender opening and spray paint the inner fender black. This will conceal high contrast paint colors behind the RTR vent.



8. Immediately remove the painters tape and wipe away any overspray with a clean towel and isopropyl alcohol.



9. Insert the RTR vent into the vehicle fender as shown. Repeat steps 1-9 on the opposite side of the vehicle.