


34.048″		3.00″		-34.048
	SEISMIC PLATE			


Seismic Anchor Installation:





Place the seismic anchoring template on the floor where you want the booth and secure it in place with tape.

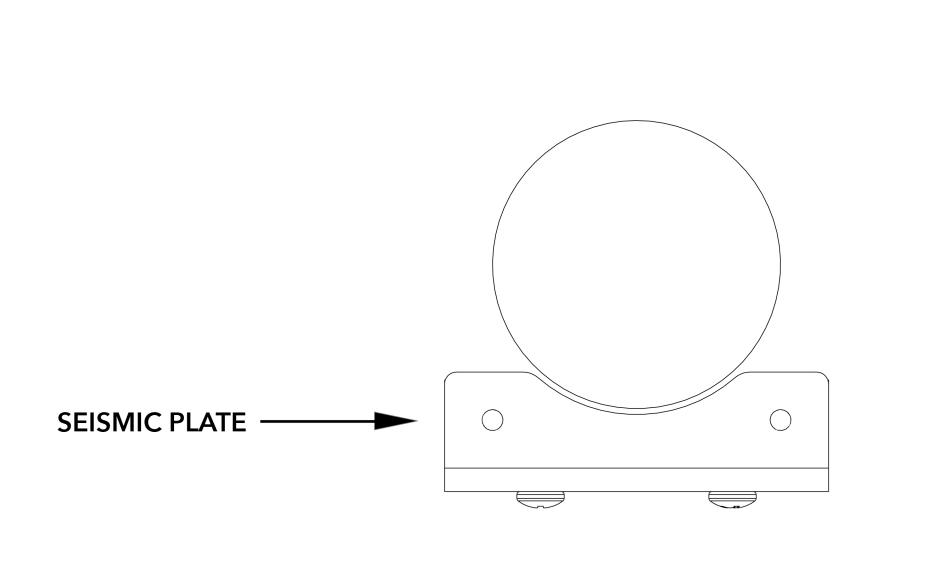

Unscrew and remove the eight seismic plates from the base of the booth.

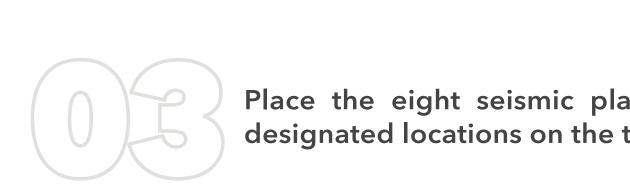



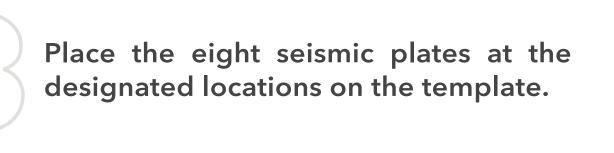





Using the included screws (F), bolt the plates to the floor through the two holes in the base of the plates.



Remove the template and place the base of the booth on the floor, setting the feet inside of the seismic plates.

_____ ŤŤ

