

BREATH HOLE
Equipped with breathing hole.



HAND SWITCH
Utilizes a high-grade electric actuator driven enable full adjusted product hi-lo.



TWIN LIFT
Strong twin-lift mechanism ensures rigidity and stability during treatment.



LOCKING SYSTEM
Fitted with retractable casters and central lock for easy mobility.

Model: 50/34120

Specifications

Construction: High quality steel sections, and sheet construction utilizing the latest manufacturing techniques

Coating: Epoxy powder coat finish

Dimension: L2000mm x W610mm x H500mm - 950mm

Head Section: -22° to 72° (gas spring mechanism)

Foot Section: -45° to 30° (gas spring mechanism)

Max Load: 200kg

Warranty: 12 months on frame and component against manufacturing defects. Wear and tear not included.

Origin: Germany



Optional Accessory



Side Rail



Paper Roll Holder

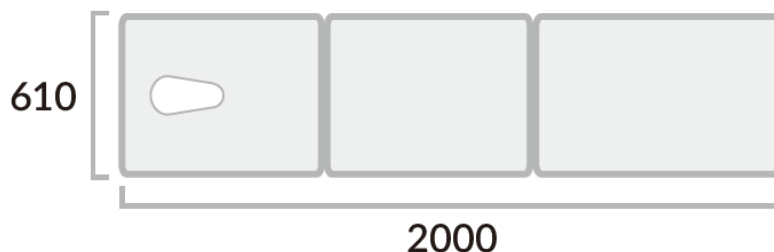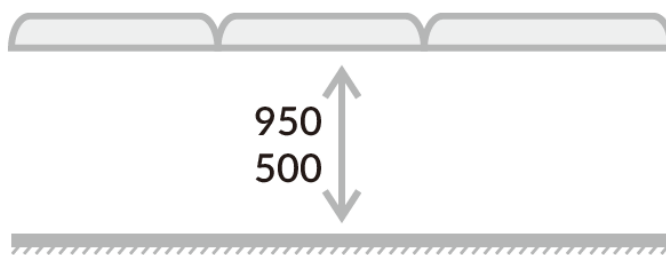

MDSS GmbH
Schiffgraben 41
30175 Hannover, Germany

