


LOCKING SYSTEM

Fitted with retractable casters and central lock mechanism to ease product's mobility.



LOCKING SYSTEM

Adjustable foot mechanism for stability on uneven surfaces.

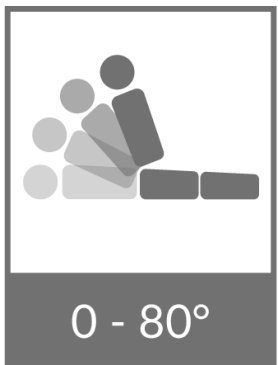

BREATHING HOLE

Standard breathing hole and plug provides excellent support and comfort for prone patient.



MOTOR

Utilizes a high-grade electric actuator driven enable full adjusted product hi-lo.



TWIN LIFT

Strong twin-lift mechanism ensures rigidity and stability during treatment.

Model: 50/34122

Specifications

Construction: High quality steel sections, and sheet construction utilizing the latest manufacturing techniques

Coating: Epoxy powder coat finish


Dimension: L1965mm x W1050mm x H510mm - 885mm

Head Section: 0° to 80°

Max Load: 250kg

Warranty: 12 months on frame and component against manufacturing defects. Wear and tear not included.

Origin: Germany

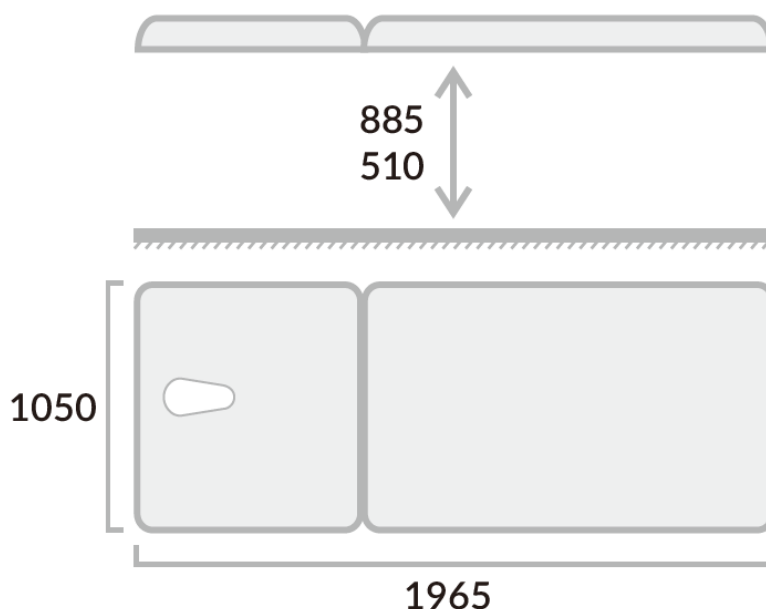

MDSS GmbH
Schiffgraben 41
30175 Hannover, Germany

