

### Model: 61501-TR2USB-1A1C

### 5.8A USB Type A/Type-C Wall Outlet Charger with 15A Tamper-Resistant Receptacle



USB CHARGER RECEPTACLES

#### Description

The ENERLITES 61501-TR2USB-1A1C is a dual port 5.8 Amp USB Type-C/Type-A charger combined with two 15 Amp tamper-resistant receptacles. Our high speed USB Type-C and USB Type-A ports include IntelliChip technology to deliver the most advanced charging technology and optimize current to reduce charging time to devices. The USB charger receptacle allows the user to charge up to two USB devices (one USB-A and one USB-C) simultaneously without the use of bulky adapters while continuing to power traditional appliances such as a lamp or television with the same receptacle

#### Features

- Smart chip technology recognizes and optimizes the charging requirements of individual devices including Apple, Samsung, Nexus, Pixel and more
- One Type A Port and one Type-C Port; combined total of 5.8A of charging power
  - Type-C Port can charge maximum 3 Amps @ 5V
  - Type A Port can charge maximum 2.8 Amps @ 5V
- Tamper-Resistant improves child safety – built-in shutter prevents access by most non-rated/foreign objects
- USB Ports tested to withstand over 10,000 insertions
- Charges most Type A and Type-C USB powered devices
- Type-C Port permits the cables to be inserted easily in either direction
- Compatible with USB 3.1, 3.0, 2.0, 1.1 devices
- No data transfer capability
- Interchangeable Color Face Cover Light Almond and Black included

#### Charging Models

- Galaxy S8 and later, iPad / iPad mini / AirPods / Apple Watch, iPhone 12 / 12 mini / 12 Pro / 12 Pro Max / iPhone SE (2nd generation) / 11 / 11 Pro / 11 Pro Max / XS / XS Max / XR / X / 8 Plus / 8
- Type C provides faster charging and is emerging as the standard port on many phones, and tablets, such as iPhone 12/11/XS/MAX/XR/X/8/7, iPads, Samsung Galaxy S10/S9/S8/S7/S6, Samsung Tabs, Google Pixel and More

#### Testing & Code Compliance



#### Specification Submittal

#### Specifications

Receptacle Rating	<b>15A, 125VAC</b>
Type A USB Port	<b>5V-2.8A</b>
Type C PD Port	<b>5V-3A</b>
Wire Terminals	<b>#14-#12 AWG</b>
Operating Temperature	<b>-4 to 140°F (-20 to 60°C)</b>
Supported	<b>USB 3.1, 3.0, 2.0, 1.1</b>
Dimensions	<b>2.71"X1.71"X1.79"</b>
Warranty	<b>2 Years</b>


#### Application

- Cafes
- Airport Lounges
- Laboratories
- Kitchens
- Meeting Rooms
- Bedrooms
- Offices
- Restaurants
- Hotels
- Cafeterias

#### Color Swatches



#### Dimensional Drawing

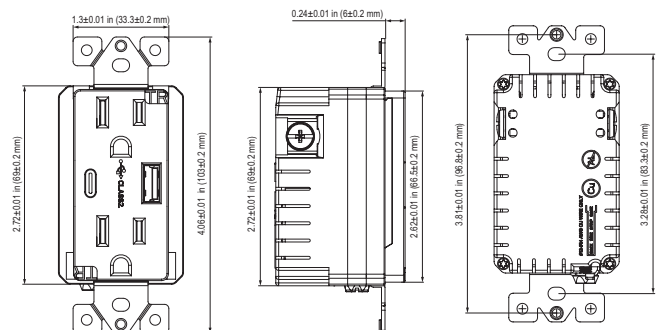

Job Name:

Job Number:

Models: